



Model No.	Name	Details
GV-Mount103 / 103-1		Dimensions GV-Mount103 219 x 125 x 340 mm / 8.6 x 4.9 x 13.4 in GV-Mount103-1 219 x 125 x 240 mm / 8.6 x 4.9 x 9.4 in
		Weight GV-Mount103 2.2 kg / 4.9 lb GV-Mount103-1 1.76 kg / 3.88 lb
GV-Mount104 / 104-1		Dimensions 219 x 125 x 332 mm / 8.6 x 4.9 x 13.1 in
		Weight 1.8 kg / 3.97 lb
GV-Mount105 / 105-1		Dimensions 256 x 256 x 297 mm / 10.1 x 10.1 x 11.7 in
		Weight 6.2 kg / 13.67 lb


- **GV-Mount103 unit: mm**

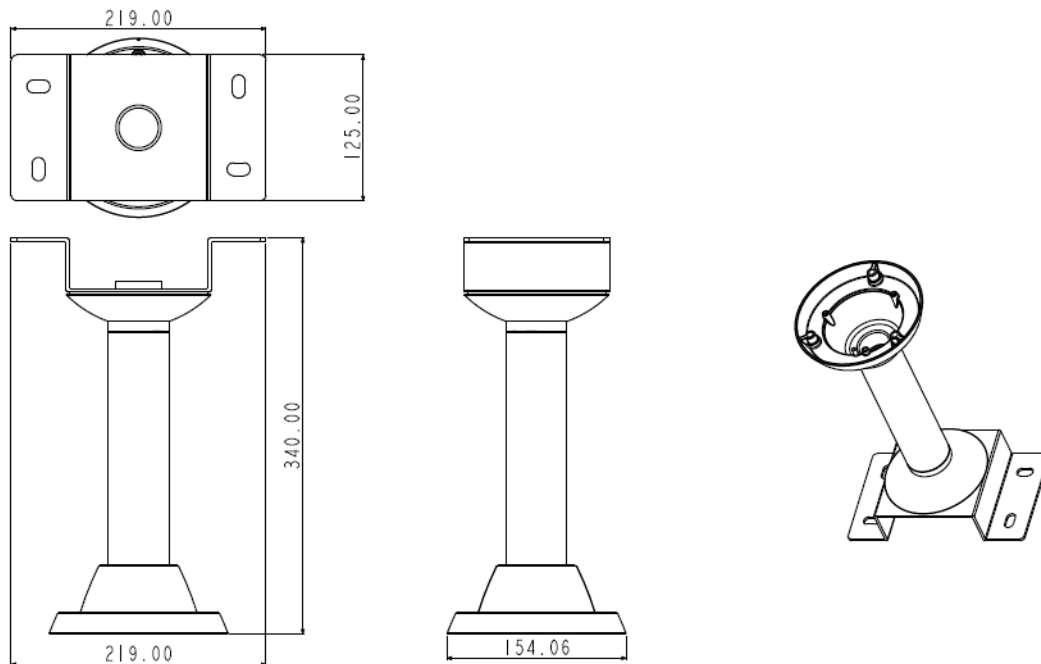

- **GV-Mount103-1 unit: mm**

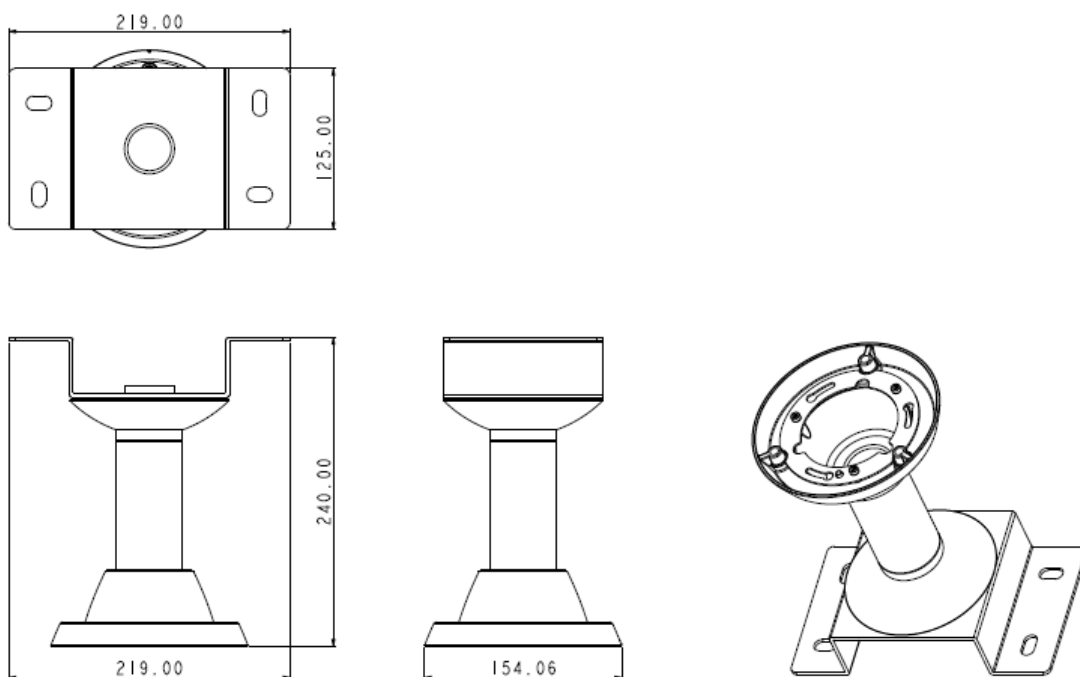

6.4.2 GV-SD2301 / 2301 V2 / 2411 / 2411 V2 / 2723-IR / 2733-IR

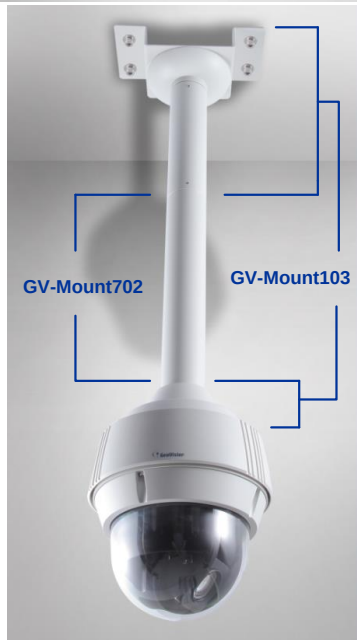

**GV-SD2301 / 2411
GV-SD2301 V2 / 2411 V2**

GV-SD2723-IR / 2733-IR

This installation method is only applicable to **GV-SD2301 / 2301 V2 / 2411 / 2411 V2 / 2723-IR / 2733-IR**.

Required accessories:

- GV-Mount103
- GV-Mount103-1

The user needs to prepare:

- Screws for ceiling x 4

Optionally extend with:

- GV-Mount702

6 Installing the GV-IP Speed Dome

1. For GV-SD2301 / 2301 V2 / 2411 / 2411 V2, follow step 1 in 6.1.2 GV-SD2301 / 2301 V2 / SD2411 / 2411 V2 to insert the desiccant packs and the SD card. For GV-SD2723-IR / 2733-IR, follow step 1 in 6.1.4 GV-SD2723-IR / GV-SD2733-IR to insert the SD card.
2. Assemble the tube (GV-Mount103 / 103-1, No. 3), the mounting cap (GV-Mount103 / 103-1, No. 2), and the mounting bracket (GV-Mount103 / 103-1, No. 1) by rotating the parts together.



3. Make sure the tubes are properly screwed. Tighten the screws using the supplied hex key (GV-Mount103 / 103-1, No. 4).



4. Thread the network, power and other cables (including the cables connected through the waterproof rubber) through the tube.
5. Connect the network, power and other cables to the camera. See 1.6 *Connecting the Camera*, *GV-IP Speed Dome User's Manual*.
6. Rotate the camera onto the mounting cap and secure the camera using the supplied hex key (GV-Mount103 / 103-1, No. 4). For detailed installation procedures of the cameras, see 6.1.2 GV-SD2301 / 2301 V2 / SD2411 / 2411 V2 and 6.1.4 GV-SD2723-IR / GV-SD2733-IR.



7. Secure the assembled camera to the ceiling with 4 self-prepared screws.