


# MIC7000 Illuminator

[www.boschsecurity.com](http://www.boschsecurity.com)**BOSCH**

Invented for life

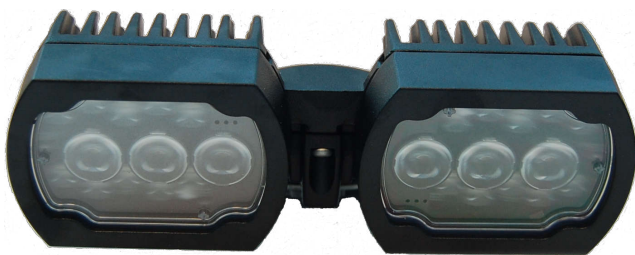

- ▶ Combination infrared and /White light LED-based illuminator
- ▶ Enables Detection of moving objects up to 175 m (575 ft) using IR illumination
- ▶ Activate/deactivate automatically, manually, and by preset
- ▶ Field-installable on MIC7000 camera in upright, inverted, or canted orientation
- ▶ Rugged IP68 / NEMA 6P ingress rated housing design matches colors of MIC7000 cameras

The MIC7000 illuminator accessory consists of a dual-pod housing incorporating a combination of long-life Infrared (IR) and White light LEDs. This accessory illuminates the scene to allow viewing of objects even in total darkness, ensuring high quality images regardless of the lighting conditions. When attached to the MIC7130 starlight models, Detection of moving objects at up to 175 m (575 ft) is possible.

## Functions

As ambient light decreases in the scene, the camera switches to monochrome mode and automatically activates the IR LEDs of the illuminator. Operators can turn the White light LEDs on and off as necessary, especially to use as a deterrent effect.

Beam intensity is controlled automatically or manually, depending on user preference. Decreasing intensity reduces overexposure. A patented Constant Light technology feature compensates for LED aging effects over the life of the product.

The MIC illuminator's IK10, vandal-resistant design integrates tough, polycarbonate windows attached to a corrosion-resistant aluminum body finished with a durable powder coat paint. The illuminator is exceptionally resistant to relatively high levels of wind,

vibration, and shock. The combination of the camera and attached illuminator accessory continue to meet MIC's traditional IP68 / NEMA 6P ingress rating. Operators have the option to set automatic timeout of the White light mode. After this mode times out, the illuminator will operate in IR mode.

When IR illuminators are active, the IR focus correction feature of the camera block is enabled automatically. Likewise, when White light illuminators are active, appropriate changes to white balance feature of camera block are implemented.

Operators can disable the White light functionality permanently or by sector in order to prevent activation in situations where White light might create a hazardous situation such as blinding a driver on a highway.

The MIC7000 illuminator accessory is easily installed in the field on a MIC7000 camera that is mounted in upright, inverted, or canted orientation.

For aesthetics, the colors of the illuminator housing match those of the MIC7000 camera models (black, white, grey).

### Certifications and approvals

Safety	UL, CE (including EU eco-directive 2009/125/EC, and harmonized norm based on EU regulation 1194/2012)
Illumination safety	Meets Risk Group 1 exposure limits based on IEC 62471
Ingress Protection	IP68 NEMA 6P (when attached to camera)
IK Code	IK10

### Installation/configuration notes

**Note:** The MIC7000 illuminator accessory is not compatible with the extreme low temperature models (including MIC-7130-PB4PB, MIC-7130-PW4PB, MIC-7230-PB4PB, and MIC-7230-PW4PB).

### Parts included

1	One (1) MIC Illuminator accessory
1	One (1) spanner tool [to remove the access plug from the camera head]
3	Three (3) M4x10 socket head Torx screws
1	One (1) Quick Installation Guide

### Technical specifications

#### IR Array

Number of LEDs	20
Wavelength	850 nm
Vertical Beam Angle	15° FWHM
Horizontal Beam Angle	30° FWHM

#### White Light Array

Number of LED Quads	6
Color Temperature	6700K
Vertical Beam Angle	13° FWHM
Horizontal Beam Angle	25° FWHM

### Performance Range (based on DCRI criteria)

MIC-7130 models, IR light	Detection: 175 m (575 ft) Classification: 150 m (490 ft) Recognition: 100 m (330 ft) Identification: 60 m (200 ft)
MIC-7130 models, White light	Classification: >125 m (410 ft)
MIC-7230 models, IR light	Detection: 150 m (490 ft) Classification: 100 m (330 ft) Recognition: 60 m (200 ft) Identification: 50 m (165 ft)
MIC-7230 models, White light	Classification: >100 m (330 ft)

### Electrical

Power Consumption	30 W (provided by the MIC7000 camera)
-------------------	---------------------------------------


### Environmental


Operation Temperature	-40 °C to +60 °C (-40 °F to +140 °F)
Cold Start-up Temperature	-40 °C (-40 °F) (Requires 60-minute warm-up prior to operation.)
Storage Temperature	-60 °C to +70 °C (-76 °F to +158 °F)
Humidity	0-100%
Wind Load	209 km/h (130 mph) (sustained) (Gusts up to 290 km/h (180 mph)) Effective Projected Area (EPA): illuminator accessory installed on camera: 0.070 m <sup>2</sup> (0.75 ft <sup>2</sup> ) illuminator accessory only: 0.018 m <sup>2</sup> (0.19 ft <sup>2</sup> )
Vibration	NEMA TS2 5m/s <sup>2</sup> (0.5g)
Shock	IEC 60068-2-7, Test Ea: Shock, 20g

### Construction


Dimensions (W x H x D)	215 mm x 115 mm x 117 mm (8.5 x 4.5 x 4.6 in.)
Weight	1.2 kg (2.7 lb)
Construction Material	Corrosion-resistant aluminum alloy with polycarbonate windows
Standard Colors	Black (RAL 9005), White (RAL 9010), or Grey (RAL 7001, available in specific regions only)
Finish	Pre-treated surface covered with powder coat paint, sand finish

### Dimensional Drawings

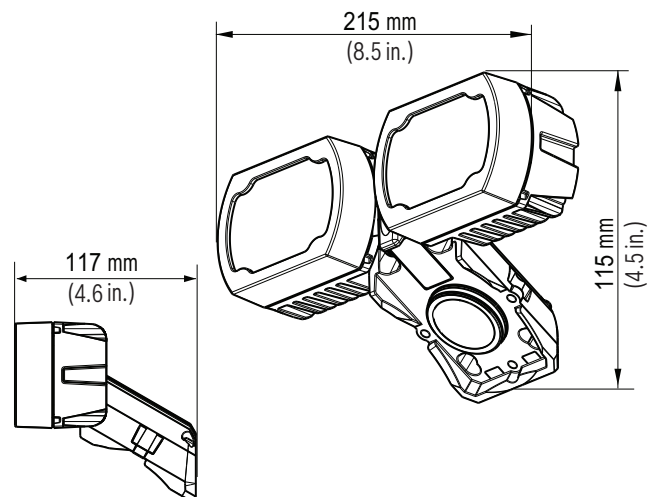


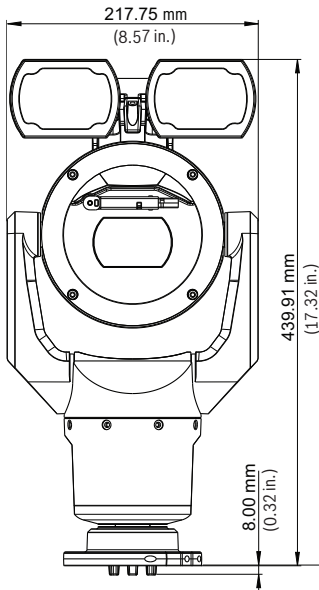


Front view, with illuminator - upright

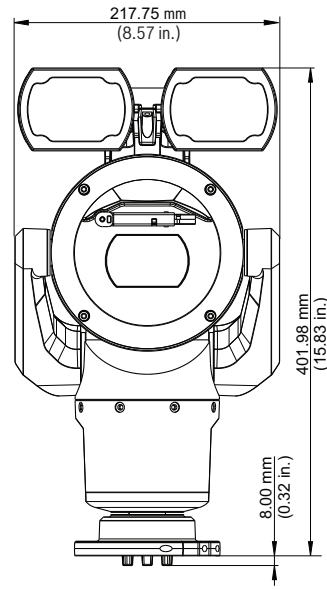



Front view, with illuminator - canted

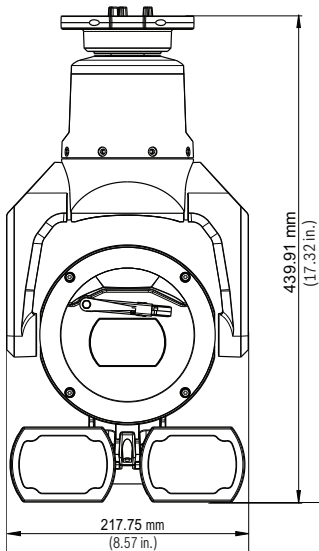

Front view, with illuminator - inverted

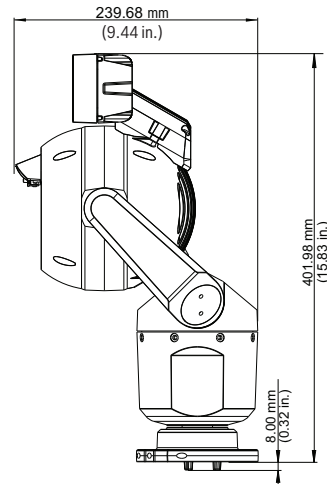

Side view, with illuminator - canted

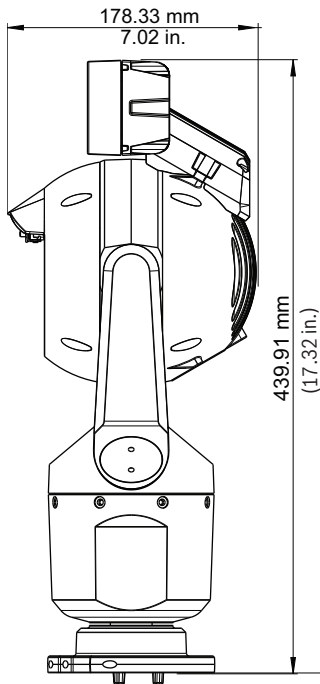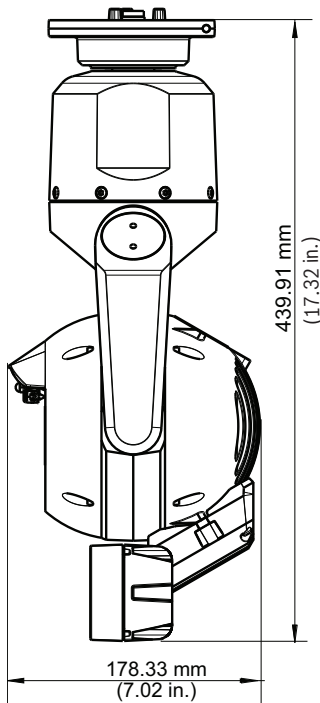*Side view, with illuminator - upright**Side view, with illuminator - inverted*

**MIC-ILW-100 Illuminator, IR/White light combo, White**  
Illuminator accessory for MIC7000 Series.  
Combination of IR (850 nm) + White light (6700K)  
LEDs.

White (RAL 9010). Sand finish.

Not applicable to extreme low temperature models.

Order number **MIC-ILW-100**

**MIC-ILG-100 Illuminator, IR/White light combo, Grey**  
Illuminator accessory for MIC7000 Series.  
Combination of IR (850 nm) + White light (6700K)  
LEDs.

Grey (RAL 7001). Available in specific regions only.

Sand finish.

Not applicable to extreme low temperature models.

Order number **MIC-ILG-100**

### Ordering information

**MIC-ILB-100 Illuminator, IR/White light combo, Black**  
Illuminator accessory for MIC7000 Series.  
Combination of IR (850 nm) + White light (6700K)  
LEDs.

Black (RAL 9005). Sand finish.

Not applicable to extreme low temperature models.

Order number **MIC-ILB-100**

**Represented by:**

**Americas:**

Bosch Security Systems, Inc.  
130 Perinton Parkway  
Fairport, New York, 14450, USA  
Phone: +1 800 289 0096  
Fax: +1 585 223 9180  
security.sales@us.bosch.com  
www.boschsecurity.us

**Europe, Middle East, Africa:**

Bosch Security Systems B.V.  
P.O. Box 80002  
5617 BA Eindhoven, The Netherlands  
Phone: + 31 40 2577 284  
Fax: +31 40 2577 330  
emea.securitysystems@bosch.com  
www.boschsecurity.com

**Asia-Pacific:**

Robert Bosch (SEA) Pte Ltd, Security  
Systems  
11 Bishan Street 21  
Singapore 573943  
Phone: +65 6571 2808  
Fax: +65 6571 2699  
apr.securitysystems@bosch.com  
www.boschsecurity.asia

**China:**

Bosch (Shanghai) Security Systems Ltd.  
203 Building, No. 333 Fuquan Road  
North IBP  
Changning District, Shanghai  
200335 China  
Phone +86 21 22181111  
Fax: +86 21 22182398  
www.boschsecurity.com.cn

**America Latina:**

Robert Bosch Ltda Security Systems Division  
Via Anhanguera, Km 98  
CEP 13065-900  
Campinas, Sao Paulo, Brazil  
Phone: +55 19 2103 2860  
Fax: +55 19 2103 2862  
latam.boschsecurity@bosch.com  
www.boschsecurity.com