

Platinum HD TVI 16CH DVR LTD8316T-ET




Key Features:

- Support HD-TVI / IP / Analog / Analog HD cameras
- HDMI & VGA output up to 1920x1080p resolution
- CVBS output for spot out and long transmission
- Up to 1080p@30fps with LTS Efficient mode On

Rear Panel:

- | | | |
|------------------|------------------|------------------|
| 1. Video In | 6. HDMI | 11. Power Switch |
| 2. Video out | 7. USB Interface | 12. GND |
| 3. Audio In | 8. LAN | |
| 4. Audio Out | 9. RS-485 Serial | |
| 5. VGA Interface | 10. DC 12V | |

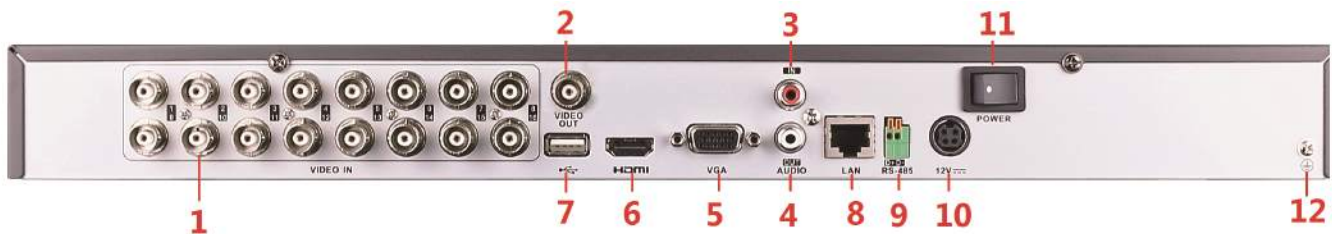

Platinum HD TVI 16CH DVR

LTD8316T-ET

VIDEO/ AUDIO INPUT	
Video compression	H.264 Zip+
Video input	16ch
	BNC (1.0 Vp-p, 75 Ω), PAL / NTSC self-adaptive
IP input	up to 2ch(Support ONVIF, up to 2MP resolution)
Audio compression	G.711u
Audio input	1-ch, RCA (2.0 Vp-p, 1 kΩ)
Two-way audio input	1-ch, RCA (2.0 Vp-p, 1 kΩ)
VIDEO/ AUDIO OUTPUT	
HDMI/ VGA output	Up to 2560 × 1440
CVBS output	1-ch, BNC (1.0 Vp-p, 1 kΩ)
Frame rate	Main stream:1/16 fps to real time frame rate
	Sub-stream:WD1/4CIF@12fps,CIF/QVGA/QCIF@real time frame rate
Video bit rate	32 Kbps- 6Mbps
Audio output	1-ch, RCA (Linear, 1 kΩ)
Audio bit rate	64 Kbps
Dual-stream	Support
Stream type	Video, Video & Audio
Synchronous playback	16ch
NETWORK	
Remote connections	128
Network protocols	TCP/IP, PPPoE, DHCP, DNS, DDNS, NTP, SADP, SMTP, SNMP, NFS, iSCSI, UPnP™, HTTPS
HARD DISK	
SATA	2 SATA
Capacity	Up to 6TB capacity for each disk
EXTERNAL INTERFACE	
Network interface	1:10M / 100M/1000M self-adaptive Ethernet interface
Serial interface	RS-485
USB port	1 × USB2.0, 1 × USB3.0
Alarm in/ out	-
GENERAL	
Power supply	DC12V
Consumption	≤ 30W
Working temperature	-10 ° C ~ +55 ° C (14° F - 131° F)
Working humidity	10% ~ 90%
Chassis	1U chassis
Dimensions (WxDxH)	380 × 320 × 45 mm (15.0 × 12.6 × 1.8 inch)
Weight	≤ 2Kg (4.4lb)