



FD9181-HT

Fixed Dome Network Camera



5MP · H.265 · Smart Stream II · 1080p 60 fps · WDR Pro · SNV · PIR · P-iris · 30M IR



VIVOTEK's FD9181-HT is a brand-new professional H.265 high-efficiency indoor dome network camera, offering 30 fps @ 5-Megapixel or 60 fps @ 1080p with outstanding image quality. By employing H.265 technology, the camera is able to provide higher and more efficient image compression rates than previous H.264 systems. In addition, VIVOTEK's sophisticated Smart Stream II technology enables the cameras to optimize quality for desired regions and therefore to maximize efficiency of bandwidth usage. Combining both H.265 and Smart Stream II, the FD9181-HT can reduce bandwidth and storage consumption by up to 80%* while retaining exceptional 5-Megapixel image quality.

To meet the demands of indoor applications, VIVOTEK's FD9181-HT features a built-in PIR sensor to help detect any unexpected events and to provide real-time responses .


* Depending on scenes

Key Features


- H.265 Compression Technology
- 1/1.8" Progressive CMOS Sensor
- 30 fps @ 2560x1920, 60 fps @ 1920x1080
- Smart Stream II to Optimize Bandwidth Efficiency
- WDR Pro for Unparalleled Visibility in High Contrast Environments
- Built-in IR Illuminators, Effective up to 30 Meters
- Remote Focus for Easy Focus Adjustments
- SNV (Supreme Night Visibility) for Low Light Conditions
- PIR
- Video Rotation for Corridor View
- P-iris Lens
- DIS (Digital Image Stabilization)

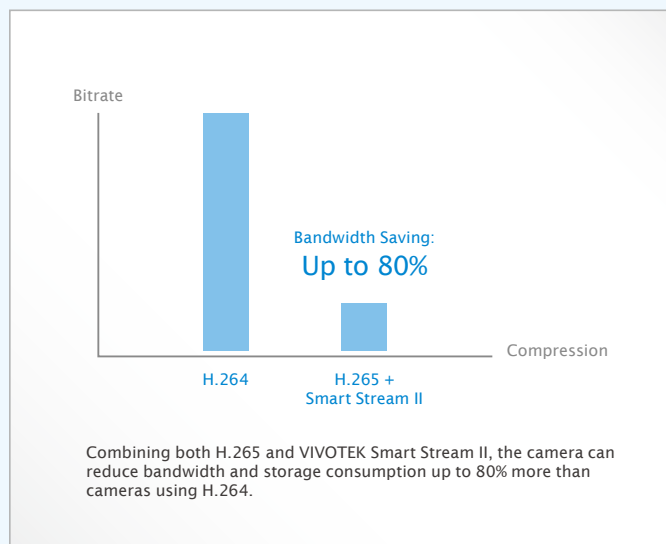

Bank



Hotel



Restaurant



Store

Technical Specifications

Model	FD9181-HT
System Information	
CPU	Multimedia SoC (System-on-Chip)
Flash	128MB
RAM	512MB
Camera Features	
Image Sensor	1/1.8" Progressive CMOS
Maximum Resolution	2560x1920 (5MP)
Lens Type	Vari-Focal
Focal Length	f = 4 ~ 9 mm
Aperture	F1.3 ~ F2.2
Auto-iris	P-iris
Field of View	45° ~ 93° (Horizontal) 34° ~ 68° (Vertical) 64° ~ 121° (Diagonal)
Shutter Time	1/5 sec. to 1/32,000 sec.
WDR Technology	WDR Pro
Day/Night	Removable IR-cut filter for day & night function
Minimum Illumination	0.04 Lux @ F1.3 (Color) 0.001 Lux @ F1.3 (B/W)
Pan/Tilt/Zoom Functionalities	ePTZ: 48x digital zoom (4x on IE plug-in, 12x built in)
IR Illuminators	30 meters
On-board Storage	Slot type: MicroSD/SDHC/SDXC card slot Seamless Recording
Video	
Compression	H.265 & H.264 & MJPEG
Maximum Frame Rate	H.265 & H.264: 30 fps @ 2560x1920 60 fps @ 1920x1080 MJPEG: 12 fps @ 2560x1920 30 fps @ 1920x1080
Maximum Streams	4 simultaneous streams
S/N Ratio	57 dB
Dynamic Range	100 dB
Video Streaming	Adjustable resolution, quality and bitrate Smart Stream II
Image Settings	Time stamp, text overlay, flip & mirror Configurable brightness, contrast, saturation, sharpness, white balance, exposure control, gain, backlight compensation, privacy masks Scheduled profile settings, 3DNR, video rotation, defog, DIS
Audio	
Audio Capability	Two-Way Audio (full duplex)
Compression	G711, G726
Interface	Internal microphone input Audio output
Effective Range	5m
Network	
Users	Live viewing for up to 10 clients
Protocols	IPv4, IPv6, TCP/IP, HTTP, HTTPS, UPnP, RTSP/RTMP, IGMP, SMTP, FTP, DHCP, NTP, DNS, DDNS, PPPoE, CoS, QoS, SNMP, 802.1X, UDP, ICMP, ARP, SSL, TLS
Interface	10 Base-T/100 BaseTX Ethernet (RJ-45) *It is highly recommended to use standard CAT5e & CAT6 cables which are compliant with the 3P/ETL standard.

* Available per project request.


Compatible Accessories

Mounting Kits

**AM-215 (v02)**
L Shape Bracket**AM-514**
Adapter Ring**AM-527 (v01)**
Mounting Adapter**AM-712 (v03)**
Conduit Box**AP-FXC-0201**
PoE Extender with
Conduit Box

PoE Kits

Dimensions

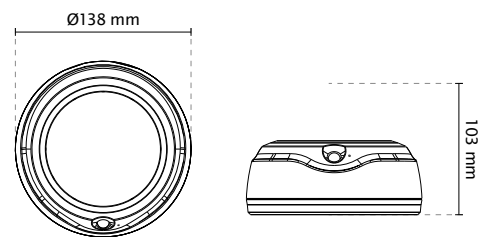ONVIF Supported, specifications available at www.onvif.org**Intelligent Video****Video Motion Detection** Five-window video motion detection**VCA*** Line crossing detection, field detection, loitering detection**Alarm and Event****Alarm Triggers** Motion detection, manual trigger, digital input, periodical trigger, system boot, recording notification, camera tampering detection, audio detection**Alarm Events** Event notification using digital output, HTTP, SMTP, FTP and NAS server, SD Card
File upload via HTTP, SMTP, FTP, NAS server and SD card**General****Smart Focus System** Remote Focus**Connectors** RJ-45 cable connector for Network/PoE connection
Audio input
Audio output
DC 12V power input
Digital input*1
Digital output*1**LED Indicator** System power and status indicator**Power Input** DC12V
IEEE 802.3af/at PoE Class 0**Power Consumption** Max. 12.8 W**Dimensions** Ø 138 x 103 mm**Weight** 530 g**Safety Certifications** CE, LVD, FCC Class B, VCCI, C-Tick, UL**Operating Temperature** Starting Temperature: 0°C ~ 50°C (32°F ~ 122°F)
Working Temperature: -10°C ~ 50°C (14°F ~ 122°F)**Humidity** 90%**Warranty** 36 months**System Requirements****Operating System** Microsoft Windows 8/7/Vista/XP/2000**Web Browser** Mozilla Firefox 7~10 (streaming only)
Internet Explorer 7/8/9/10/11**Other Players** VLC: 1.1.11 or above
Quicktime: 7 or above**Included Accessories****CD** User's manual, quick installation guide, Installation Wizard 2, VAST**Others** Quick installation guide, screw pack, alignment sticker, CD

All specifications are subject to change without notice. Copyright © VIVOTEK INC. All rights reserved.

Ver. 7