



# A1 SECURITY CAMERAS

The First Name in Security

## T2428100C

### AC Power Supply

#### Overview:

T2428100C AC Power Supply provides 24VAC with 4A or 28VAC with 3.5A of continuous supply current.

#### Specifications:

- Input: 115VAC 50/60Hz, 0.95A.
- Output: 24VAC @ 4A or 28VAC @ 3.5A supply current.
- In-line fuse rated @ 3.5A/250V.
- Green grounding lead.

220VAC models are available upon request.

#### Installation Instructions:

1. Mount the AC power supply in desired location.
2. Connect the AC (115VAC 50/60 Hz) to the black and white flying leads of the transformer (*Fig. 1*).
3. Measure output voltage before connecting devices. This helps avoiding potential damage.
4. Connect 24VAC devices to terminals marked [COM] and [24VAC] or 28VAC devices to terminals marked [COM] and [28VAC] on the terminal block on the inside back of the enclosure.
5. Upon completion of the wiring secure enclosure door with screws (supplied).


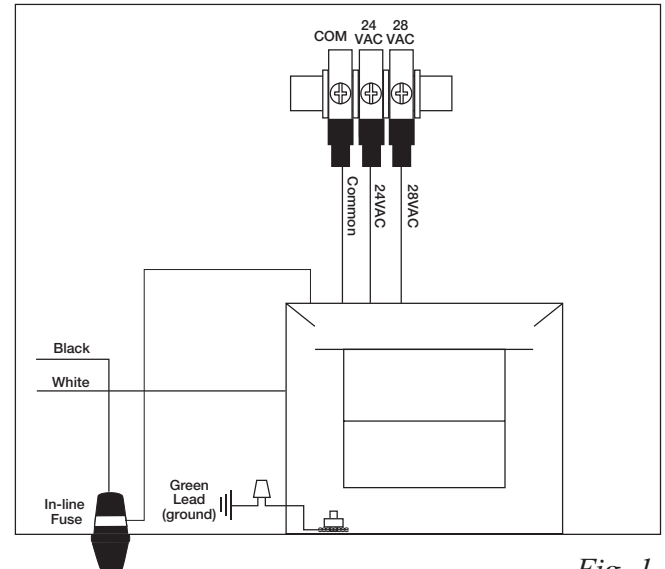


Fig. 1

**WARNING:** This installation should be made by qualified service personnel and should conform to the National Electrical Code and all local codes.

#### Enclosure Dimensions (H x W x D approximate):

5.625" x 7" x 4.5" (142.88mm x 177.8mm x 114.3mm)

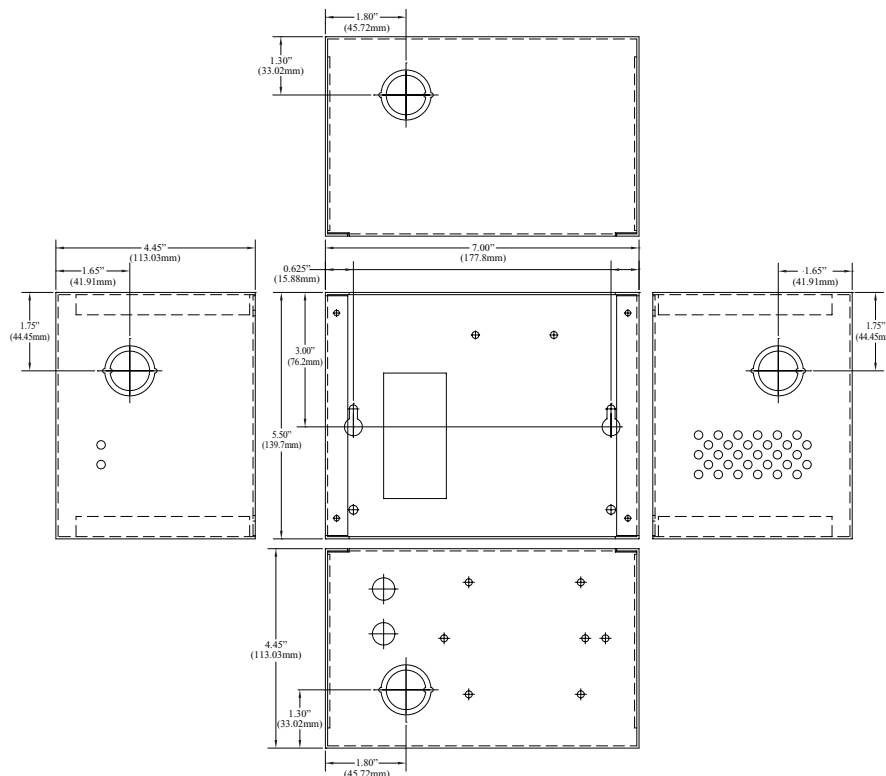

Altronix is not responsible for any typographical errors. Product specifications are subject to change without notice.

140 58th Street, Brooklyn, New York 11220 USA, 718-567-8181, fax: 718-567-9056  
website: [www.altronix.com](http://www.altronix.com), e-mail: [info@altronix.com](mailto:info@altronix.com). Lifetime Warranty, Made in U.S.A.  
IIT2428100C - Rev. 032306

B19P

