

GV-BL5700 5MP H.265 Low Lux WDR IR Bullet IP Camera



- 1/1.8" progressive scan low lux CMOS
- Dual streams from H.265, H.264, and MJPEG
- Up to 30 fps at 2592 x 1944
- P-iris lens for auto iris control
- Vandal resistance (IK10 for metal casing)
- Ingress protection (IP67)
- Day/Night function (with removable IR-cut filter)
- Intelligent IR
- IR distance up to 30 m (98.4 ft)
- Two-way audio
- One alarm input and sensor output
- Built-in micro SD card slot for local storage
- DC 12V / PoE (IEEE 802.3af)
- Wide Dynamic Range
- Defog
- Text overlay
- Tampering alarm
- 3D noise reduction
- IP address filtering
- Recording assigned by GV-Edge Recording Manager (Windows & Mac)
- Supports iPhone, iPad, Android & 3GPP
- 31 languages on Web interface
- ONVIF (Profile S) conformant

* No Memory Card Slot & local storage function for Argentina.

Introduction

GV-BL5700 is an outdoor camera for optimal day and night surveillance. GV-BL5700 can support H.265 video codec to achieve better compression ratio while maintaining high quality picture at reduced network bandwidths. For night operations, the camera allows up to 30 m (98.4 ft) IR effective distance. It also uses P-iris to produce images with better clarify and contrast.

Active Tampering Alarm


Tampered




Focus Change



Camera Shift

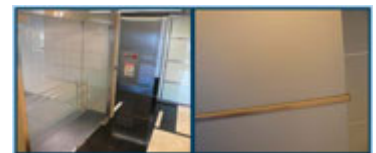

Dimensions

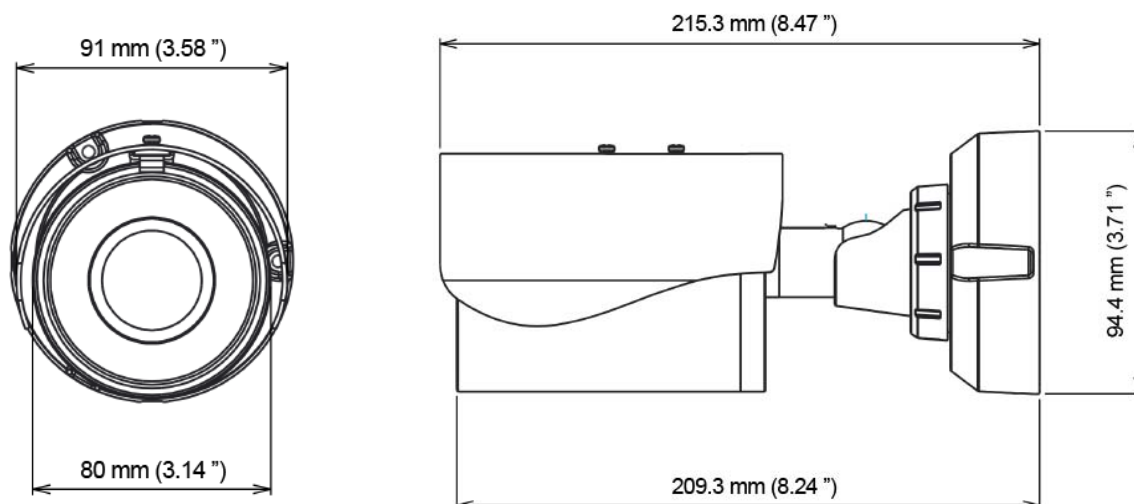

Specifications

| Camera | | |
|----------------------------------|-------|--|
| Image Sensor | | 1/1.8" progressive scan CMOS |
| Picture Elements | | 2592 (H) x 1944 (V) |
| Minimum Illumination | Color | 0.04 Lux |
| | B/W | 0.03 Lux |
| | IR ON | 0 Lux |
| Shutter Speed | | Automatic, Manual (1/5 ~ 1/8000 sec.) |
| White Balance | | Automatic, Manual (2800K ~ 8500K) |
| Gain Control | | Automatic |
| S/N Ratio | | 50 dB |
| WDR | | Yes |
| Dynamic Range | | Up to 72dB |
| BLC | | Yes |
| Lens | | |
| Megapixel | | Yes |
| Focal Length | | 4 ~ 8 mm |
| Day/Night | | Yes (with removable IR-cut filter) |
| Lens Type | | Varifocal lens |
| Maximum Aperture | | F/1.65 |
| Mount | | Ø 14 mm |
| Image Format | | 1/1.8" |
| Horizontal FOV | | 88° ~ 51° |
| Operation | Focus | Manual (w/lock) |
| | Zoom | Manual (w/lock) |
| | Iris | P-Iris |
| Max. Torque (Focus/ Zoom Screws) | | 0.049 N.m |
| IR LED Quantity | | 12 IR LEDs |
| Max. IR Distance | | 30 m (98.4 ft) |
| Operation | | |
| Video Compression | | H.265, H.264, MJPEG |
| Video Stream | | Stream 1 from H.265 or H.264 Stream 2 from H.265, H.264 or MJPEG |
| Frame Rate | | 30 fps at 2592 x 1944 (60/50 Hz) * The frame rate and performance may vary depending on the number of connections and data bit-rates (different scenes). |
| Image Setting | | Brightness, Contrast, Saturation, Sharpness, Gamma, White Balance, Flicker-less, Image Orientation, Shutter Speed, Backlight Compensation, D/N Sensitivity, WDR, Defog, Low Lux Enhancement, Denoise, Metering |
| Audio Compression | | G.711 |

Operation

| | |
|---------------|---------------------------------|
| Audio Support | Two-Way Audio |
| Sensor Input | 1 Input (Dry Contact) |
| Alarm Output | 1 Digital Output (200 mA 5V DC) |

Video Resolution

| | | |
|-------------|--------|--|
| Main Stream | 4 : 3 | 2592 x 1944 (Default), 2048 x 1536, 1600 x 1200, 1280 x 960, 640 x 480 |
| | 16 : 9 | 2592 x 1520, 2304 x 1296, 1920 x 1080, 1280 x 720, 640 x 360 |
| | 5 : 4 | 1280 x 1024, 640 x 512, |
| Sub Stream | 4 : 3 | 1024 x 768, 640 x 480 (Default), 320 x 240 |
| | 16 : 9 | 1280 x 720, 640 x 360, 448 x 256 |
| | 5 : 4 | 1280 x 1024, 640 x 512, 320 x 256 |

Network

| | |
|-----------|---|
| Interface | 10/100 Ethernet |
| Protocol | DHCP, DynDNS, FTP, HTTP, HTTPS, NTP, ONVIF (Profile S), PSIA, QoS (DSCP), RTSP, SNMP, SMTP, TCP, UDP, UPnP, 3GPP/ISMA |

Mechanical

| | | |
|-------------------------|---------------|---|
| Temperature Detector | | Yes |
| Camera Angle Adjustment | Pan | 0° ~ 360° |
| | Tilt | 90° ~ 180° |
| | Rotate | 0° ~ 360° |
| Connectors | Power | 2-pin terminal block, PoE |
| | Ethernet | Ethernet (10/100 Base-T), RJ-45 Cable |
| | Audio | 1 In (2-pin terminal block for microphone) 1 Out (2-pin terminal block for microphone) |
| | Digital I/O | 4-pin terminal block |
| | Local Storage | Micro SD card slot (SD/SDHC/SDXC/UHS-I, Class 10) *UHS-II card type is not supported. |
| LED Indicator | | 2 LEDs: Power, Status |

General

| | | |
|-------------------------|-----------|--|
| Environment Temperature | Start-up | -20°C ~ 50°C (-4 °F ~ 122 °F) |
| | Operation | -30°C ~ 50°C (-22 °F ~ 122 °F) |
| Humidity | | 10% to 90% (no condensation) |
| Power Source | | 12V DC / PoE (IEEE 802.3af) |
| Max. Power Consumption | | 12.6 W |
| Dimensions | | 215.3 x 91 x 94.4 mm (8.47 x 3.58 x 3.71") |
| Weight | | 850 g (1.87 lb) |
| Ingress Protection | | IP67 |
| Vandal Resistance | | IK10 for metal casing |
| Regulatory | | CE, FCC, RCM, LVD, RoHS compliant |

Power over Ethernet

| | |
|-----------------------|---|
| PoE Standard | PoE (IEEE 802.3af Power over Ethernet / PD) |
| PoE Power Supply Type | End-Span |
| PoE Power Output | Per Port 48V DC, 350 mA. Max. 15.4 watts |

Web Interface

| | |
|-------------------------|--|
| Installation Management | Web-based configuration |
| Maintenance | Firmware upgrade through Web Browser or Utility |
| Access from Web Browser | Camera Live View, Video Recording, Change Video Quality, Bandwidth Control, Image Snapshot, Digital I/O Control, Audio, Picture in Picture, Picture and Picture, Privacy Mask, Visual Automation, Tampering Alarm, Text Overlay, Digital PTZ |
| Language | Arabic / Bulgarian / Czech / Danish / Dutch / English / Finnish / French / German / Greek / Hebrew / Hungarian / Indonesian / Italian / Japanese / Lithuanian / Norwegian / Persian / Polish / Portuguese / Romanian / Russian / Serbian / Simplified Chinese / Slovakian / Slovenian / Spanish / Swedish / Thai / Traditional Chinese / Turkish |

Application

| | |
|---------------------|--|
| Network Storage | GV-Backup Center, GV-VMS |
| Smart Device Access | GV-Eye for iOS and Android |
| Live Viewing | Browser (IE, Chrome, Firefox, Safari), Mobile app |
| CMS Server support | GV-Control Center, GV-Center V2, GV-Vital Sign Monitor |

Note:






- Specifications are subject to change without prior notice.
- Mind the following when using an inserted memory card for recording:


- Recorded data on the memory card can be damaged or lost if the data are accessed while the camera is under physical shock, power interruption, memory card detachment or when the memory card reaches the end of its lifespan. No guarantee is provided for such causes.
 - The stored data can be lost if the memory card is not accessed for a long period of time. Back up your data periodically if you seldom access the memory card.
 - Memory cards are expendable and their durability varies according to the conditions of the installed site and how they are used. Back up your data regularly and replace the memory card annually.
 - To avoid power outage, it is highly suggested to apply a battery backup (UPS).
 - For better performance, it is highly suggested to use Micro SD card of MLC NAND flash, Class 10.
 - Replace the memory card when its read/write speed is lower than 6 MB/s or when the memory card is frequently undetected by the camera.
3. GV-Eye does not support H.265 video codec. Set the video codec to H.264 when connecting the camera with GV-Eye.

Packing List

- | | |
|-----------------------------------|-------------------------------|
| 1. H.265 Bullet Camera | 8. Screw for Mounting Kit x 3 |
| 2. Sun-shield Cover | 9. Nut for Mounting Kit x 3 |
| 3. Screw for Sun-shield Cover x 2 | 10. Hex Wrench |
| 4. Washer x 2 | 11. RJ-45 Connector x 2 |
| 5. Screw for Supporting Rack x 3 | 12. GV-IPCAM Software DVD |
| 6. Screw Anchor x 3 | 13. GV-Software DVD |
| 7. Silica Gel Bag x 2 | 14. Warranty Card |

Accessories

| Model No. | Name | | Details |
|----------------------|---|---|---|
| GV-Mount300 | Convex Corner Adapter Kit |  | Dimensions: 238.6 x 409.5 mm (9.4" x 16.1") Weight: 4.27 kg (9.41 lb) |
| GV-Mount310 | Concave Corner Adapter Kit |  | Dimensions: 123.3 x 393.1 mm (4.9" x 15.5") Weight: 2.96 kg (6.53 lb) |
| GV-Mount400 | Pole Mount Bracket Kit (Ø 4" ~ 6") |  | Dimensions Bracket: 241 x 161 mm (9.5" x 6.3") Weight: 1.70 kg (3.75 lb) Steel Strap Diameter: Ø 4" ~ 6" |
| GV-Mount410 | Pole Mount Bracket Kit (Ø 6" ~ 7.5") |  | Dimensions Bracket: 241 x 161 mm (9.5" x 6.3") Weight: 1.70 kg (3.75 lb) Steel Strap Diameter: Ø 6" ~ 7.5" |
| GV-PA191 PoE Adapter | Power over Ethernet (PoE) Adapter |  | The GV-PA191 is a Power over Ethernet (PoE) adapter designed to provide power to the IP device through a single Ethernet cable. |

| | | | |
|---------------|--|---|--|
| GV-Relay V2 | GV-Relay V2 |  | The GV-Relay V2 is designed to expand the voltage load of GV IP devices. It provides 4 relay outputs, and each can be set as normally open (NO) or normally closed (NC) independently as per your requirement. |
| Power Adapter | Contact your sales representative for the countries and areas supported. | | |
| GV-POE Switch | The GV-POE Switch is designed to provide power along with network connection for IP devices. The GV-POE Switch is available in various models with different numbers and types of ports. | | |