


CubeType III Network Camera

Quick Installation Guide

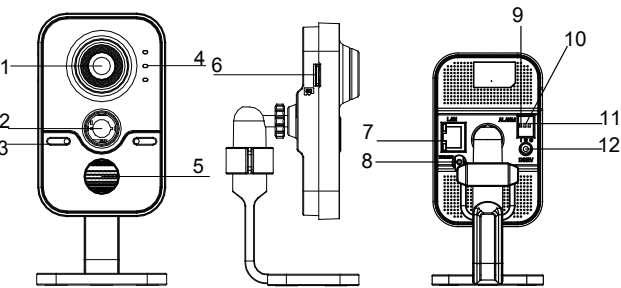

No.	Description	No.	Description
1	Lens	6	SD Card Slot
2	PIR(Passive Infrared) sensor	7	10M / 100M self-adaptive Ethernet interface & PoE
3	Microphone	8	WPS (Wi-Fi Protected Setup)/Reset Button
4	Indicators	9	Alarm Input Interface
	Alarm: Solid red when the camera is armed; Solid blue when the camera is unarmed.	10	Grounding
	Status: Reserved	11	Alarm Output Interface
	Link: Flashing amber when network is connected; Unlit when network is disconnected	12	Power Supply Interface (12 VDC)
5	IR LED		


Note:

- 1) Press RESET about 10s when the camera is powering on or rebooting to restore the default settings, including the user name, password, IP address, port No., etc.
- 2) A wireless router with the WPS function is required to enable the WPS function of the camera.


Installation

Steps:


1. Open the cover on the mounting base from the bracket.

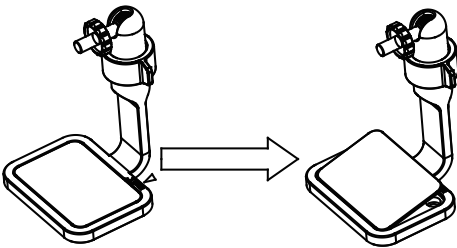


2. Drill the screw holes according to the drill template.



3. Use 3 screws to fix the bracket to the ceiling and the screw hole on the bracket should align with the mounting hole on the drill template.



4. Install the mounting base cover and attach the camera on the bracket.



5. Adjust surveillance angel

- 1).Loosen the knob to adjust the panning position and tilting position.
- 2).After adjusting the angle of the camera to the desired position, fasten the knob.

