



## Platinum Fixed Lens Turret Network IP Camera 4.1MP CMIP1142-28



### Key Features:

- 4.1MP High Definition
- Digital WDR
- 3D DNR, BLC, Intelligent H.264 Zip+
- High performance Matrix IR LED
- IP66
- DC 12V/ PoE

### Dimensions:

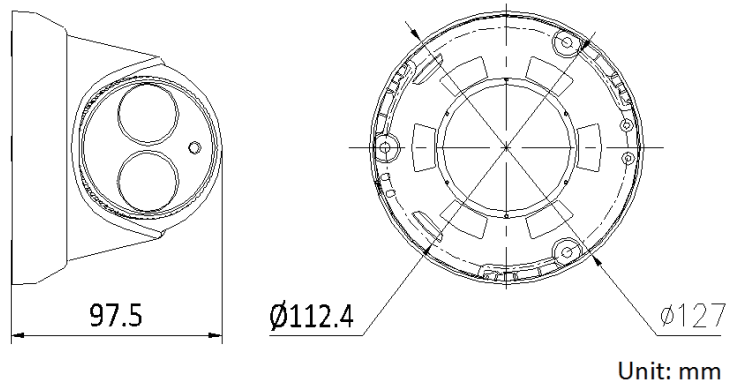

3D DNR



ICR



D&N



IP66

# Platinum Fixed Lens Turret Network IP Camera 4.1 MP

## CMIP1142-28

### CAMERA

|                    |                                                     |
|--------------------|-----------------------------------------------------|
| Image Sensor       | 1/3" Progressive Scan CMOS                          |
| Min. Illumination  | 0.01Lux @ (F1.2, AGC ON), 0 Lux with IR             |
| Shutter Speed      | 1/3 s to 1/10,000 s                                 |
| Lens               | 2.8mm                                               |
| Lens Mount         | M12                                                 |
| Day & Night        | IR cut filter with auto switch                      |
| DNR                | 3D DNR                                              |
| Wide Dynamic Range | DWDR                                                |
| Angle Adjustment   | Pan: 0° ~ 360°, Tilt: 0° ~ 75°, Rotation: 0° ~ 360° |

### Compression Standard

|                   |                          |
|-------------------|--------------------------|
| Video Compression | H.264 / MJPEG/H.264 Zip+ |
| H.264 Type        | Main Profile             |
| Video Bit Rate    | 32 Kbps ~ 8 Mbps         |
| Dual streams      | Support                  |

### Image

|                 |                                                                                                                           |
|-----------------|---------------------------------------------------------------------------------------------------------------------------|
| Max. Resolution | 2688×1520                                                                                                                 |
| Frame Rate      | 60Hz: 20fps (2688×1520), 30fps (1920×1080), 30fps(1280×720)<br>50Hz: 20fps (2688×1520), 25fps(1920×1080), 25fps(1280×720) |
| Image Setting   | Rotate Mode, Saturation, Brightness, Contrast, Sharpness adjustable by client software or web browser                     |
| BLC             | Support, zone configurable                                                                                                |
| ROI Codec       | Support                                                                                                                   |

### Network

|                 |                                                                                                                                                       |
|-----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| Network Storage | NAS (Support NFS, SMB/CIFS), ANR                                                                                                                      |
| Alarm Trigger   | Motion detection, Tampering alarm, Network disconnect, IP address conflict, Storage exception                                                         |
| Protocols       | TCP/IP, UDP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IPv6, Bonjour                 |
| General         | One-key reset, Flash-prevention, dual stream, heartbeat, mirror, password protection, privacy mask, watermark, IP address filtering, Anonymous access |
| Standard        | ONVIF (PROFILE S, PROFILE G), PSIA, CGI, ISAPI                                                                                                        |

### Interface

|                         |                               |
|-------------------------|-------------------------------|
| Communication Interface | 1 RJ45 10M/100M Ethernet port |
| Reset                   | Yes                           |

### General

|                                |                                                                           |
|--------------------------------|---------------------------------------------------------------------------|
| Working Temperature / Humidity | -22 °F ~ 140 °F (-30 °C ~ 60 °C)<br>Humidity 95% or less (non-condensing) |
| Power Supply                   | DC12V ± 10%, PoE (802.3af)                                                |
| Power Consumption              | Max. 5.5W (Max. 7.5W with ICR on)                                         |
| IR Range                       | Approx. 100ft (30 meters)                                                 |
| Weather Proof Ratings          | IP66                                                                      |
| Dimensions                     | Φ5.0" × 3.8" (Φ127×97.5mm)                                                |
| Weight                         | 1.5 lbs (670g)                                                            |