

AP-GIC-010B-030


1xGE Passive PoE Injector




Technical Specifications

Model	AP-GIC-010B-030	PoE Output Power	54VDC/30W
IP Camera Compatibility		802.3at Passive Compatible	Yes
Video Resolution	Megapixel/D1/VGA	802.3af Passive Compatible	Yes
Video Compression	MJPEG/MPEG-4/H.264/H.265	Over Current Protection	Supported
Compatible Camera List	VIVOTEK Network Cameras (FD8381-EV, IB8381-E, FE8181/81V, FE8391 excluded)	Circuit Shorting Protection	Supported
Ethernet		Power Pin Assignment	4/5(+), 7/8(-)
Gigabit Ethernet (RJ45)	1	General	
Standards		LED Indicators	Power, PoE
IEEE 802.3 10-BASE-T (Ethernet)	Supported	Power Input	100~240VAC / 50~60Hz
IEEE 802.3u 100-BASE-TX (Fast Ethernet)	Supported	Power Consumption	35W
IEEE 802.3ab 1000-BASE-T (Gigabit Ethernet)	Supported	Dimensions	146 (L) x 64 (W) x 42 (H) mm
IEEE 802.3af Power over Ethernet	Supported	Weight	0.2 kg
IEEE 802.3at Power over Ethernet	Supported	Operating Temperature	0°C ~ 50°C (32°F ~ 122°F)
Transmission Media		Storage Temperature	-20°C ~ 70°C (-4°F ~ 158°F)
10Base T	Cat. 3, 4, 5 UTP/STP	Humidity	Operating: 10~90% (Non-condensing) Storage: 10~90% (Non-condensing)
100Base TX	Cat. 5, 5e UTP/STP	Safety Certifications	CE, C-Tick, FCC, LVD
1000Base T	Cat. 5e, 6, 7 UTP/STP	Accessory	
*It is highly recommended to use standard Cat. 5e/6/7 cables which are compliant with the 3P/ETL standard.		Included Accessories	Power cord, QIG
PoE Function			
Number of PoE Out Ports	1		

Dimensions

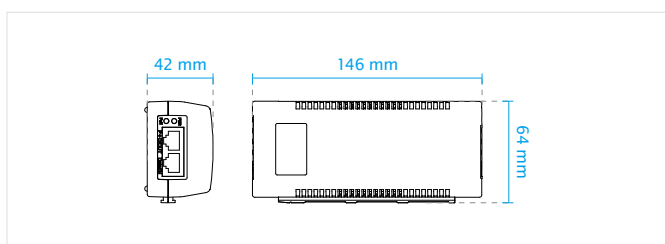

Application Diagram

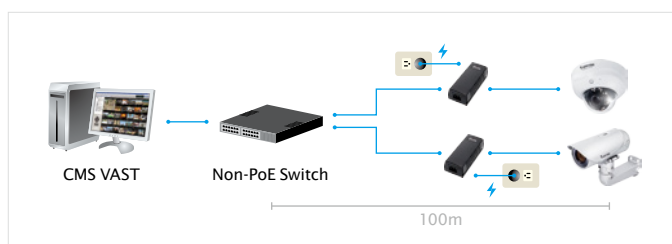

All specifications are subject to change without notice. Copyright © VIVOTEK INC. All rights reserved. Ver. 7