

Installation and Initial Operation of the BellRFID (contd.)

Enter your personal Super PIN on the keypad insert, then press the **OK** key. This key is now highlighted yellow.

Enter the Super PIN again, then confirm by pressing the **OK** key. If the two PINs are identical, the LEDs in the center are flashing repeatedly in a sequence from top to bottom. Next, the top right key (**OK**) lights up green and the key at the center (**Letter**) lights up red.



Remove the keypad insert and continue with the next step.

Note

If you entered different Super PINs or more than 60 seconds passed between entering the PIN and confirming, the module emits a warning sound and returns to the state after finishing the auto configuration. In such a case, you need to start again with step 4.

5. Set the Bell Button Set to be Installed

Depending on the bell button set, you need to select one of the six possible button layouts. **To select a button layout, press any one of the button contacts in the center.** The module shows the current button layout by flashing the LEDs in a specific manner (see table below). The configuration starts with pattern **a**; pressing any button switches to the next pattern in ascending order. After the last pattern, the module returns to pattern **a**.



Pattern	Button Set	Description
a ▲	MX-Bell1-Button-F1	LED 1 permanently blue, 2 to 5 flashing white
b	MX-Bell1-Button-F2	LED 1 permanently blue, 2+3, 4+5 sequence white
c	MX-Bell1-Button-F3	LED 1 permanently blue, 2, 3, 4+5 sequence white
d	MX-Bell1-Button-F4	LED 1 permanently blue, 2, 3, 4, 5 sequence white
e	MX-Bell1-Button-05	LEDs 1, 2, 3, 4, 5 sequence white
f ▼	MX-Bell1-Button-XL1	LEDs 1 to 5 flashing white simultaneously

Once you have found the proper pattern, keep any one of the buttons at the center pressed until the LEDs are flashing repeatedly in a sequence. Next, the top center and right buttons (**OK** and **Letter**) light up green and the button at the top left (**ESC**) lights up red.



The button contacts are now locked until the function and bell buttons have been inserted and the admin card has been trained.

6. Insert the Function/Bell Buttons

In order to insert the function or bell buttons, you need to remove the BellRFID module from the frame of the door station (if you have not already done so). Use the blue MOBOTIX key for unlocking the module.



Insert the function and bell buttons in the proper order by inserting the elements from the bottom (e.g., the blue function button first). In order to avoid damaging the buttons, press the elements into the module using two thumbs as shown.



Click the BellRFID module with the buttons into the IP Video Door Station as described in step 2.

7. Train the Admin Card

Now that you have entered the Super PIN and inserted the buttons, you need to train the Admin card. This card is used as the "master key" for authentication purposes and is required for training and deleting user cards, for example. For every-day use, however (opening doors, mailbox features), you only need the blue user cards. Note that you should always keep the admin card together with the **Product Pass** of the IP Video Door Station in a safe place.

Hold the admin card in front of the BellRFID module for 5 seconds until the sound stops. The LEDs light up in a sequence to confirm that the card has been trained.

All three LEDs at the top are now green to show that the initial operation has been completed successfully. The button contacts are now unlocked.



Continue with step 8 or finish the installation as described in the door station's *System Manual Part 2*.

8. Add User Cards (Any Time Later on)

This step is not part of the initial operation of the system and can be performed at any time later on. You can skip this step if you do not intend to use the features described here.

The blue user cards are used by the inhabitants to open the door without using a key and to listen to mailbox messages directly at the IP Video Door Station. If the blue function button at the top has not been installed, make sure that you pay attention to the corresponding key position for the LED patterns described in the following.

Hold the trained admin card in front of the BellRFID module. The **OK/MENU** key at the top right position lights up red.

If you want to use the keyless entry features and listen to mailbox messages at the door, press the bell button of the party to which you want to assign the user card. The selected button lights up white. If you want to use this card only for opening the door (i.e., for the nursing service) make sure that you do **not** press any button now.

Hold the user card in front of the BellRFID module for 5 seconds until the module plays a sound. The LEDs light up in a sequence to confirm that the card has been trained.

If you want to train additional cards, repeat the steps listed in this section for each card.

Test the trained cards by holding them in front of the BellRFID module one by one. The electrical door opener should open the door with each card.

In Case of Loss/Theft: Delete All Cards!

In case a user card is lost, you need to delete this card in order to prevent unauthorized access to the door. The easiest method is to delete all cards (user **and** admin) and to train the remaining cards again later on.

In order to delete all cards, hold the red admin card in front of the BellRFID module until the **OK/MENU** key lights up red. Then briefly remove the admin card and hold it in front of the module again (the **ESC/ALARM** key flashes red).

Now press and hold any bell button until the three LEDs at the top start flashing red. Confirm the deletion by again pressing and holding the same bell button. The LEDs light up in a sequence to confirm that all cards have been deleted. The left status LED of the module briefly lights up green.

If you want to train the cards again, execute the instructions of **steps 7 and 8**.

Note: It is also possible to delete only specific user cards or a lost admin card. For additional information on how to do this, see the door station's *System Manual Part 2*.

Operation: Buttons and Signaling

Ring the Bell for One Party

Briefly press the bell button of the desired party. The LED of the button briefly lights up.

Leave a Message (BellRFID with Function Button)

- **After pressing a bell button and announcement:** Keep the blue letter key pressed while leaving the message.
- **Without having pressed a bell button:** Briefly press the blue letter key and then the bell button of the party for which you want to leave the message. As soon as the mailbox announcement stops, you can start talking. Keep the blue letter key pressed the entire time.

Leave a Message (BellRFID without Function Button)

- **After pressing a bell button and announcement:** Keep the same bell button pressed while leaving the message.
- **Without having pressed a bell button:** Not possible.

Open door with blue user card

Hold the blue user card in front of the BellRFID module. If the module denies access (e.g., card has been deleted, is not trained), the red status LED (above the **ESC/ALARM** key) lights up.

Upon Power Failure (Red LED Is Flashing)

Press and hold the **ESC/ALARM** key until the button illumination lights up. You can now open the door with your user card during the next 10 seconds. This feature is only available if the IP Video Door Station is equipped with a DoorMaster.

Play Back New Message*

If you are opening the door with a user card and the blue letter key is flashing (5 seconds), there is at least one unflagged message in the corresponding mailbox. You can now use one of the following functions:

	Press the flashing key to play back the message. Press again to repeat the message.
	Flag the message, i.e., the message cannot be played back at the door, but only at a remote station (e.g., MOBOTIX App, MxEasy).
	Play back next message.

The mailbox closes automatically 15 seconds after the last user action/message or if you press the **ESC/ALARM** button.

Recording New Mailbox Messages*

You can either use one of the system's predefined announcements or record custom announcements. These announcements will be played back if the mailbox is activated and the ringing has not been answered. A new custom announcement always replaces the last announcement that had been used. You can set the current announcement using a remote station (e.g., MOBOTIX App, MxEasy).

Press your bell button and hold the blue user card in front of the module (bell sound is played back, green LED (mailbox activated) or red LED (mailbox deactivated) lights up). Press the bell button again and keep it pressed as long as you record the announcement. The red status LED is flashing while recording.

Additional BellRFID Features (see Door Station's System Manual)

Activating/Deactivating the Mailbox*

Checking the Mailbox without Opening the Door*

Keep the blue letter key pressed until it starts flashing, then hold the blue user card in front of the module. The first new message is played back. Press the blue letter key to play back the messages again. To delete the messages, keep the **ESC/ALARM** pressed until you hear a sound. If there are no new messages (any more), the system will make a corresponding announcement.

Deleting User/Admin Cards and Transponders

- Card held in front of the module
- All cards assigned to one bell button
- Lost admin card
- Specific user card or transponder using the assigned transponder number




Changing the Super PIN

Changing the Bell Button Set

Notes

- Please follow the notes on installing and operating the device in the door station's *System Manual* (www.mobotix.com in the **Support > Manuals** section). This document contains the wiring diagrams for the different connection variants.
- The BellRFID module is only to be used in the original frame of the MOBOTIX IP Video Door Station.
- Before installing, make sure that the seal on the back of the BellRFID module has been properly attached.
- When inserting the module into the frame, only press at the edge, never at the center of the module.
- Make sure the device is not operated outside of its operating temperature range of -30 to +60 °C/-22 to +140 °F.
- BellRFID and KeypadRFID can only be used on one MxBus with a later software version of the camera.

LED Patterns

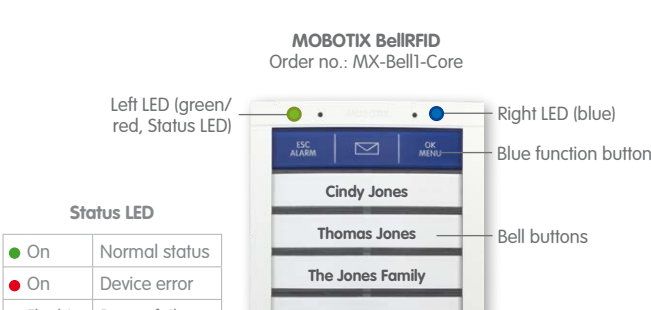

Dimensions



Innovations – Made in Germany

The German company MOBOTIX AG is known as the leading pioneer in network camera technology and its decentralized concept has made high-resolution video systems cost-efficient.

MOBOTIX AG • D-67722 Langmeil • Phone: +49 6302 9816-103 • Fax: +49 6302 9816-190 • sales@mobotix.com

Available from A1 Security Cameras
www.a1securitycameras.com email: sales@a1securitycameras.com

