

X2TF

2MP Turret Dome Fixed IR Outdoor IP Security Camera




Camera	
Image Sensor	1/2.8" Progressive Scan CMOS
Min. Illumination	0.01Lux @ (F1.2, AGC ON), 0 Lux with IR
Shutter time	1/3 s to 1/10,000 s
Lens	2.8mm @ F2.0 angle of view: 109.4°(2.8mm), 90°(4mm), 53.9°(6mm) (4mm, 6mm is optional)
Lens Mount	M12
Adjustment Range	Pan:0° ~ 360°, Tilt: 0° ~ 75°, Rotation: 0° ~ 360°
Day& Night	IR cut filter with auto switch
Wide Dynamic Range	Digital WDR
Digital noise reduction	3D DNR
Compression Standard	
Video Compression	H.264/MJPEG
H.264 code profile	BaseLine Profile/Main Profile
Video bit rate	32Kbps~8Mbps
Dual Stream	Yes
Image	
Max. Image Resolution	1920 x 1080
Frame Rate	50Hz: 25fps (1920 x 1080), 25fps (1280 x 960), 25fps (1280 x 720) 60Hz: 30fps (1920 x 1080), 30fps (1280 x 960), 30fps (1280 x 720)
Image Settings	Rotate Mode, Saturation, Brightness, Contrast, Sharpness adjustable by client software or web browser
BLC	Yes, zone configurable
ROI	Support
Network	
Network Storage	NAS (Support NFS,SMB/CIFS), ANR
Alarm Trigger	Intrusion detection, Line crossing detection, Motion detection, Dynamic analysis, Tampering alarm, Network disconnect, IP address conflict, Storage exception
Protocols	TCP/IP, UDP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IPv6, Bonjour
General Function	Flash-prevention, dual stream, heartbeat, mirror, password protection, privacy mask, watermark, IP address filtering, Anonymous access
System Compatibility	ONVIF, PSIA, CGI, ISAPI
Interface	
Communication Interface	1 RJ45 10M / 100M Ethernet interface
General	
Operating Conditions	-14 °F ~ 140 °F
Power Supply	Humidity 95% or less (non-condensing) 12 V DC ± 10%, PoE (802.3af)
Power Consumption	Max. 5.5W
Weather Proof	IP67
IR Range	Up to 100ft
Dimensions	5.0" × 3.84"
Weight	1.26lbs

* Product specifications may change without prior notice.

Features

- 2.1MP, 1920x1080@30fps
- 2.8mm fixed lens
- IR up to 100ft
- 3-Axis rotate
- IP67
- DC 12V, POE
- Video Content Analytic

Dimensions

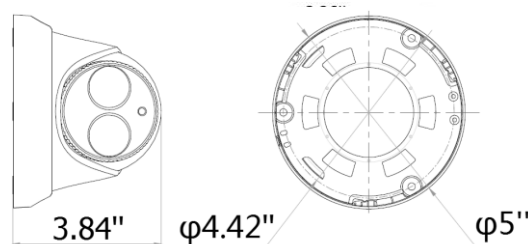

Order Model

X2TF

Optional Brackets



Bracket-ADF-WM

Bracket-ADF-J

Bracket-ADF-P