

X2DV

2MP Dome Varifocal Lens IR Outdoor IP Security Camera



Camera	
Image Sensor	1/2.8" Progressive Scan CMOS
Min. Illumination	0.01Lux @(F1.2,AGC ON), 0.014 Lux @(F1.4,AGC ON), 0 Lux with IR
Shutter time	1/3 s ~ 1/10,000 s
Lens	2.8 - 12 mm @ F1.4, angle of view: 113°~33.8°
Lens Mount	φ14
Auto iris	DC drive
Adjustment Range	Pan:0° - 355°, Tilt: 0° - 75°, Rotation: 0° - 355°
Day& Night	IR cut filter with auto switch
Wide Dynamic Range	Digital WDR
Digital noise reduction	3D DNR
Compression Standard	
Video Compression	H.264/MJPEG
H.264 code profile	Main/Basic profile
Video bit rate	32Kbps~8Mbps
Audio Compression	G.711 / G.722.1 / G.726 / MP2L2
Image	
Max. Image Resolution	1920 x 1080
Frame Rate	50Hz: 25fps(1920 x 1080, 1280 x 960, 1280 x 720) 60Hz: 30fps (1920 x 1080, 1280 x 960, 1280 x 720)
Backlight compensation	Yes, zone configurable
Image Settings	Rotate Mode, Saturation, Brightness, Contrast, Sharpness adjustable by client software or web browser
ROI	Yes
Network	
Network Storage	NAS
Alarm Trigger	Line Crossing, Intrusion Detection, Motion detection, tampering alarm
Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IPv6, Bonjour
General Function	User authentication, watermark, dual stream
System Compatibility	ONVIF, PSIA, CGI, ISAPI
Interface	
Communication Interface	1 RJ45 10M / 100M Ethernet interface
Onboard storage	Built-in Micro SD / SDHC / SDXC card slot, up to 128 GB
Audio	1-ch audio in, 1-ch audio out
Alarm	1 alarm I/O
General	
Operating Conditions	-22 °F ~ 140 °F Humidity 95% or less (non-condensing)
Power Supply	12 VDC ± 10%, PoE (802.3af)
Power Consumption	Max. 5.5W (max. 7W with ICR on)
Impact Protection	Up to IK10
Weather Proof	IP66
IR Range	Up to 100ft
Dimensions	Φ 5.55" x 3.93"
Weight	2.2lbs


* Product specifications may change without prior notice.



Features

- 2.1MP, 1920x1080@25fps
- 2.8-12mm vari-focal lens
- IR up to 100ft
- 3-Axis rotate
- On board storage up to 128GB
- IP66 water-proof
- DC 12V, POE
- Video Content Analytic

Dimensions

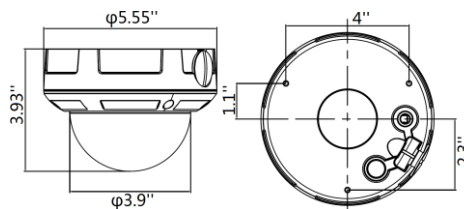

Order Model

X2DV

Optional Brackets

