


X4DF4

4MP Mini Dome Fixed IR Outdoor IP Security Camera



Camera	
Image Sensor	1/3" Progressive Scan CMOS
Min. Illumination	0.01Lux @ (F1.2, AGC ON) ,0 Lux with IR
Shutter Speed	1/3 s to 1/10,000 s
Lens	2.8mm @ F2.0 (4mm, 6mm is optional)
Lens Mount	M12
Day &Night	IR cut filter with auto switch
DNR	3D DNR
Wide Dynamic Range	120dB
P&T rotation	Pan: 0° ~ 355°, Tilt: 0° ~ 75°, Rotation: 0° ~ 355°
Compression Standard	
Video Compression	H.264 / MJPEG/H.264+
H.264 Type	Main Profile
Video Bit Rate	32 Kbps ~ 16 Mbps
Dual streams	Support
Image	
Max. Resolution	2688x1520
Frame Rate	50Hz: 20fps (2688x1520), 25fps(1920x1080), 25fps(1280x720) 60Hz: 20fps (2688x1520), 30fps (1920x1080), 30fps(1280x720)
Image Setting	Rotate Mode, Saturation, Brightness, Contrast, Sharpness adjustable by client software or web browser
BLC	Support, zone configurable
ROI Codec	Support
Network	
Network Storage	NAS (Support NFS,SMB/CIFS), ANR
Alarm Trigger	Line Crossing, Intrusion Detection, Motion detection, Tampering alarm, Network disconnect, IP address conflict, Storage exception
Protocols	TCP/IP, UDP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IPv6, Bonjour
General	One-key reset, Flash-prevention, dual stream, heartbeat, mirror, password protection, privacy mask, watermark, IP address filtering, Anonymous access
Standard	ONVIF (PROFILE S, PROFILE G), PSIA, CGI, ISAPI
Interface	
Communication Interface	1 RJ45 10M/100M Ethernet port
On-board storage	Built-in Micro SD/SDHC/SDXC slot, up to 128GB
Reset	Yes
General	
Operating Conditions	-22 °F – 140 °F Humidity 95% or less (non-condensing)
Power Supply	DC12V ± 10%, PoE (802.3af)
Power Consumption	Max. 5W
IR Range	Approx. 100ft
Ingress Protection	IP67
Impact Protection	IK10
Dimensions	4.37" x 3.24"
Weight	1.1lbs


* Product specifications may change without prior notice.



Features

- 4.1MP, 2688x1520P@20fps
- 2.8mm fixed lens
- True WDR 120dB
- IR up to 100ft
- 3-Axis rotate
- On board storage up to 128GB
- IP66, IK10
- DC 12V, POE
- Video Content Analytic

Dimensions (in)

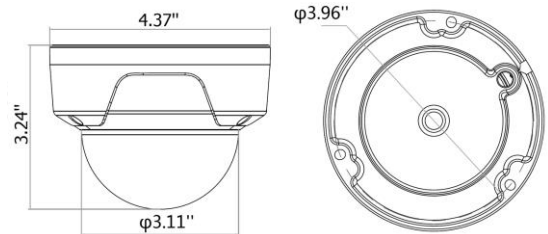

Order Model

X4DF4

Optional Brackets

