

# X4BP6

## 4MP Bullet Fixed IR Outdoor IP Security Camera



|                             |   |
|-----------------------------|---|
| <b>Camera</b>               |   |
| Image Sensor                | 1/3" Progressive Scan CMOS  |
| Min. Illumination           | 0.01Lux @(F1.2,AGC ON), 0.028Lux @(F2.0,AGC ON), 0 Lux with IR  |
| Shutter Speed               | 1/3 s ~ 1/10,000 s  |
| Slow Shutter                | Support   |
| Lens                        | 4mm @F2.0<br>(6,12mm is optional)   |
| Lens Mount                  | M12   |
| Day & Night                 | IR cut filter with auto switch  |
| WDR                         | 120dB   |
| <b>Compression Standard</b> |   |
| Video Compression           | H.264/MJPEG/H.264+  |
| H.264 Type                  | Main Profile  |
| Video Bit Rate              | 32 Kbps - 16 Mbps   |
| <b>Image</b>                |   |
| Max. Resolution             | 2688 x 1520   |
| Frame Rate                  | 50Hz: 20fps (2688x1520), 25fps(1920x1080), 25fps(1280x720)<br>60Hz: 20fps (2688x1520), 30fps (1920x1080), 30fps(1280x720)                                     |
| Image Enhancement           | BLC/3D DNR/ROI  |
| Image Setting               | Rotate Mode, Saturation, Brightness, Contrast, Sharpness adjustable by client software or web browser   |
| Day/Night Switch            | Auto/Schedule/Triggered by Alarm In   |
| <b>Network</b>              |   |
| Network Storage             | NAS (Support NFS,SMB/CIFS)  |
| Alarm Trigger               | Intrusion Detection, Line Crossing detection, Motion detection, Dynamic Analysis, Tampering alarm, Network disconnect, IP address conflict, Storage exception |
| Protocols                   | TCP/IP, UDP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IPv6, Bonjour                         |
| Security                    | Flash-prevention, dual stream, heartbeat, mirror, password protection, privacy mask, watermark, IP address filtering, Anonymous access                        |
| System Compatibility        | ONVIF (PROFILE S, PROFILE G), PSIA, CGI, ISAPI  |
| <b>General</b>              |   |
| Communication Interface     | 1 RJ45 10M/100M Ethernet interface  |
| Operating Conditions        | -22 °F - 140 °F<br>Humidity 95% or less (non-condensing)  |
| Power Supply                | 12V DC±10%, PoE (802.3af)   |
| Power Consumption           | Max. 7.5W   |
| Ingress Protection level    | IP67  |
| IR Range                    | 164ft   |
| Dimensions                  | 11.8" x 3.4" x 3.35"  |
| Weight                      | 2.65lbs   |


\* Product specifications may change without prior notice.



### Features

- 4.1MP, 2688x1520@20fps
- 4mm fixed lens
- True WDR 120dB
- IR up to 164ft
- IP66 Waterproof
- DC 12V, POE
- Support H.264+
- Video Content Analytic

### Dimensions (in)

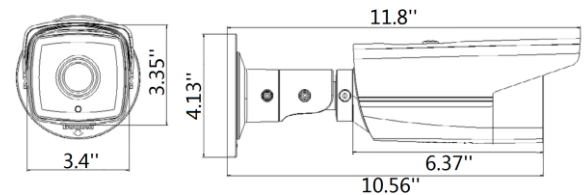

### Order Model

X4BP6