

X2DFW

2MP Mini Dome Fixed IR Outdoor IP Security Camera



Camera	
Image Sensor	1/2.8" Progressive Scan CMOS
Signal System	PAL/NTSC
Min. Illumination	0.01Lux @ (F1.2, AGC ON) ,0 Lux with IR 0.028 Lux @ (F2.0, AGC ON) ,0 Lux with IR
Shutter time	1/3 s to 1/100,000 s
Lens	2.8mm@ F2.0 (4mm, 6mm optional)
Lens Mount	M12
Adjustment Range	Pan:0° - 355°, Tilt: 0° - 75°, Rotation: 0-355°
Day& Night	IR cut filter with auto switch
Wide Dynamic Range	Digital WDR
Digital noise reduction	3D DNR
Compression Standard	
Video Compression	H.264/MJPEG
H.264 code profile	Main Profile
Video bit rate	32Kbps~8Mbps
Audio Compression	G.711/G.722.1/G.726/MP2L2
Audio bit rate	64Kbps(G.711) /16Kbps(G.722.1)/16Kbps(G.726) /32-128Kbps(MP2L2)
Dual Stream	Yes
Image	
Max. Image Resolution	1920 x 1080
Frame Rate	50Hz: 25fps(1920 x 1080), 25fps (1280 x 960), 25fps (1280 x 720) 60Hz: 30fps(1920 x 1080), 30fps (1280 x 960), 30fps (1280 x 720)
Image Settings	Rotate mode, Saturation, Brightness, Contrast adjustable by client software or web browser
BLC	Yes, zone configurable
ROI	support
3D DNR	support
Interface	
Audio	1-ch audio in, Mic in/Line in; 1-ch audio out
Communication Interface	1 RJ45 10M / 100M Ethernet interface
Alarm	1 alarm I/O
Alarm Input	1
Alarm Output	1
Storage	Built-in Micro SD/SDHC/SDXC slot, up to 128GB
General	
Operating Conditions	-22 °F ~ 140 °F Humidity 95% or less (non-condensing)
Power Supply	12 V DC ± 10%, PoE (802.3at)
Power Consumption	Max. 5.3W
Impact Protection	IEC60068-2-75Eh, 50J; EN50102, IK10
Weather Proof	IP67
IR Range	Up to 100ft
Dimensions	4.37" x 3.24"
Weight	1.1lbs


* Product specifications may change without prior notice.



Features

- 2.1MP, 1920x1080@25fps
- 2.8mm fixed lens
- IR up to 100ft
- 3-Axis rotate
- On board storage up to 128GB
- IP66, IK10
- DC 12V, POE
- Video Content Analytic

Dimensions

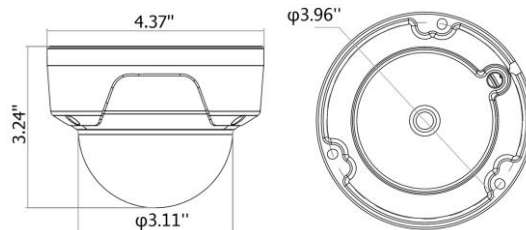

Order Model

X2DFW

Optional Brackets



Bracket-ADF-WM

Bracket-ADF-WM

Bracket-ADF-J

Bracket-ADF-P

