

C2DF

2MP Mini Dome Fixed EXIR Outdoor HD-TVI Security Camera

Camera	
Image Sensor	2MP CMOS Image Sensor
Signal System	PAL/NTSC
Effective Pixels	1928(H)x1088(V)
Min. Illumination	0.01 Lux @ (F1.2,AGC ON),0 Lux with IR
Shutter Time	1/25(1/30) s to 1/50,000 s
Lens	3.6mm/6mm optional Angle of View: 82.2° (3.6mm), 54° (6mm)
Lens Mount	M12
Adjustment Range	Pan: 0 - 340° , Tilt: 0 - 75° , Rotation: 0 - 355°
Day& Night	IR cut filter with auto switch
Wide Dynamic Range	120dB
Video Frame Rate	1080p@25fps/1080p@30fps
HD Video Output	1 Analog HD output
Synchronization	Internal Synchronization
S/N Ratio	More than 62 dB
Up the Coax	Support
Menu	
Auto White Balance	Auto/MWB
BLC	Support
AGC	Support
Function	Wide Dynamic Range; Digital Noise reduction; Mirror; SMART IR
General	
Operating Conditions	-40 ° F - 140 ° F Humidity 90% or less
Power Supply	12 VDC±15%
Power Consumption	Max. 5W
Impact Protection	IK10
Weather Proof	IP66
IR Range	Up to 66ft
Communication	Up the coax Protocol: HIKVISION-C(Coaxitron)
Dimension	φ0.43"x3.25"
Weight	0.77lbs


* Product specifications may change without prior notice.



Features

- 2.1MP, 1920x1080@30fps
- 3.6mm fixed lens
- True WDR 120dB
- Support coax protocol
- Support OSD menu
- IR up to 66ft
- IP66 Weatherproof
- IK10 Vandalproof
- 12V DC

Dimensions (in)

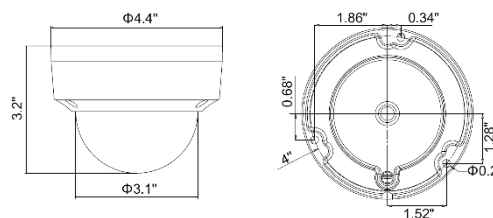

Order Model

C2DF

Optional Brackets



Bracket-ADF-WM