

XNR16-2

16 Channel PoE 6MP Network Video Recorder



Video/Audio Input	
IP video input	16-ch
Two-way audio input	1-ch, RCA (2.0 Vp-p, 1kΩ)
Network	
Incoming bandwidth	160Mbps
Outgoing bandwidth	80Mbps
Remote connection	128
Video/Audio Output	
HDMI/VGA output	1-ch, resolution: 1920 x 1080P /60Hz, 1600 x 1200 /60Hz, 1280 x 1024 /60Hz, 1280 x 720 /60Hz, 1024 x 768 /60Hz
Recording Resolution	6MP/5MP/3MP/1080P/UXGA/720P/VGA/4CIF/DCIF/2CIF/CIF/QCIF
Frame Rate	Main stream: 50 fps (P) / 60 fps (N) Sub-stream: 50 fps (P) / 60 fps (N)
Audio Output	1-ch, RCA (Linear, 1kΩ)
Synchronous Playback	16-ch
Decoding	
Live view / Playback	6MP/5MP/3MP/1080P/UXGA/720P/VGA/4CIF/DCIF/2CIF/CIF/QCIF
Capability	5-ch@1080P
Hard Disk	
SATA	2 SATA interfaces for 2 HDDs
Capacity	Up to 6TB capacity for each HDD
External Interface	
Network Interface	1 RJ-45 10/100/1000Mbps self-adaptive Ethernet interface
USB Interface	1 x USB 2.0 and 1 x USB 3.0
Alarm In	4-ch
Alarm Out	1-ch
POE	
Interface	16 independent 100 Mbps PoE network interfaces
Max. Power	200W
Supported Standard	AF and AT
General	
Power Supply	100~240V AC
Consumption(without hard disk and POE)	Less than 15W
Working Temperature	+14 °F~ + 131 °F
Working Humidity	10 % ~ 90 %
Chassis	19-inch rack-mounted 1U chassis
Dimensions	17.5" x11.4" x 1.8"
Weight(without HDD)	Less than 2.2 lbs


* Product specifications may change without prior notice.



Features

- Support 6MP resolution
- 16-ch network camera inputs
- 160Mbps incoming bandwidth
- 5-ch@1080P decoding
- Support alarm I/O
- Support 2 SATA with 6TB HDD for each
- Up to 16 independent POE network interfaces

Physical Interfaces

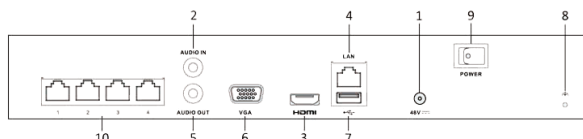

Index	Name
1	Power Supply
2	Audio In
3	HDMI Interface
4	LAN Network Interface
5	Audio Out
6	VGA Interface
7	USB Interface
8	Ground
9	Power Switch
10	Network Interfaces with POE Function

Order Model

XNR16-2