

CPTZI-23I

2MP PTZ Indoor HD-TVI Security Camera



2.1
MegaPixel


Camera	
Image Sensor	1/2.8" Progressive Scan CMOS
Effective Pixels	1920(H)x1080(V)
Signal System	PAL/NTSC
Minimum Illumination	Color: 0.05Lux@(F1.4,AGC ON); B/W: 0.01Lux@(F1.4,AGC ON)
White Balance	Auto / Manual / ATW / Indoor / Outdoor
AGC	Auto/Manual
BLC	ON/OFF
DWDR	Support
Shutter Time	PAL: 1-1/10,000s NTSC: 1-1/10,000s
Day & Night	IR cut filter with auto switch
Digital Zoom	16x
Privacy Masking	8 privacy masks programmable
Auto Focus	Auto / Semi-automatic / Manual
Lens	
Focal Length	4-92mm, 23x
Zoom Speed	Approx.4.0s(Optical Wide-Tele)
Angle of View	49-2.2 degree (Wide-Tele)
Minimum Working Distance	10-1000mm(Wide-Tele)
Aperture Range	F1.6-F3.7
Pan & Tilt	
Pan/Tilt Range	360° endless; Tilt: 0° ~90°
Pan/Tilt Speed	Pan Manual Speed: 0.1° ~160° /s, Pan Preset Speed: 160° /s Tilt Manual Speed: 0.1° ~120° /s, Tilt Preset Speed: 120° /s
Proportional Zoom	Rotation speed can be adjusted automatically according to zoom multiples
Number of Preset	256
Patrol	8 patrols, up to 32 presets per patrol
Pattern	4 patterns, with the recording time not less than 10 minutes per pattern
Power loss recovery	Support
Park Action	Preset / Patrol / Pattern / Pan scan / Tilt scan / Random scan / Frame scan / Panorama scan
PTZ Position Display	ON/OFF
Freeze Frame	Support
Alarm	
Alarm Input	2
Alarm Output	1
Input & Output	
Turbo HD Output	1 turbo HD1080p output, BNC
General	
RS-485 Protocols	HIKVISION, Pelco-P, Pelco-D, self-adaptive
Power Supply	24V AC
Power Consumption	Max.12W
Working Temperature/Humidity	-22° F ~ 149° F/ 90% or less
Protection Level	TVS 4,000V lightning protection, surge protection and voltage transient protection
Dimensions	Φ6.5"x7.07"(Indoor) Φ6.5"x6.61"(In-ceiling)
Weight	4.41lbs

* Product specifications may change without prior notice.

Features

- 2.1MP, 1920x1080@30fps
- 4-92mm motorized lens
- 23X Optical Zoom
- Support coax protocol
- Support OSD menu
- IR up to 132ft
- 3D intelligent positioning function
- Support Turbo HD and BNC output
- IP66
- 12V DC

Dimensions (in)

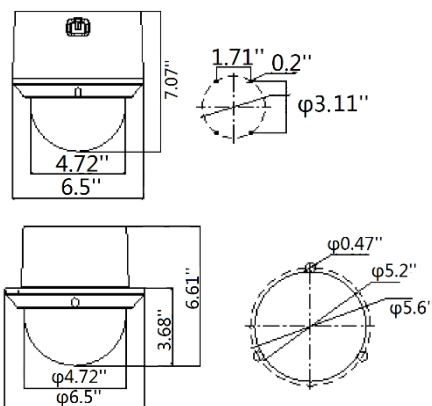

Order Model

CPTZI-23I

Optional Brackets



APTZ-WMP

APTZ-WM