


HD-TVI 2MP Intensifier® T Bullet Camera

HTINT70T	2.8-12mm auto iris varifocal lens, dark grey housing
HTINT701T	3.6mm fixed lens, dark grey housing
HTINT702T	5-50mm auto iris varifocal lens, dark grey housing

Features

- Full HD resolution over coax (HD-TVI)
- Supports up to Full HD 1080p @ 30fps
- True WDR operation
- Superior low-light performance
- Amplify existing light with no distance limitation
- With presets for different scenarios
- Built-in heater and anti-fog glass reduces condensation
- 3 axis lens mount
- Full OSD operation through on-board control and UTC (up the coax)
- Additional 960H analog output
- Signal distance up to 1600 ft. (depending on coax quality)*
- 12VDC & 24VAC dual voltage operation
- Vandal / tamper resistant
- IP67 compliant, weather resistant
- 5 year warranty

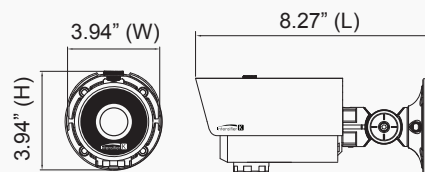

Camera Specifications

Image Sensor	1/3" Sony Exmor CMOS, 2MP
Minimum Illumination.....	0.001 lux
Effective Pixels	1984 (H) x 1105 (V)
Total Pixels	2000 (H) x 1121 (V)
Scanning System.....	Progressive
S/N Ratio	More than 50dB
Output Resolution.....	1920x1080 @30fps / 1280x720 @ 60fps
Video Output.....	1.0Vp-p / 75 Ohms
Electronic Shutter	Auto / Manual (1/30 – 1/30,000 sec.) / Flicker
WDR.....	On (Low / Middle / High) / Off
Day / Night.....	Auto / Color / BW / External
White Balance	Auto / AWB / AWC-Set / Manual
Brightness.....	0 – 20 (adjustable)
AGC.....	0 – 20 (adjustable)
Sense-up	2x – 32x (adjustable)
Backlight.....	BLC / HSBLC
Motion Detection.....	On / Off (4 zones)
Privacy Masking	On / Off (16 zones)

Camera Specifications (continued)

Mirror	On / Off
V-Flip	On / Off
Sharpness	0 – 20 (adjustable)
Lens Shading.....	On / Off
DNR.....	Off / Low / Middle / High
Test Monitor Output	CVBS
Communication.....	UTC (up the coax)

Operating & Unit Specifications

Power	12VDC / 24VAC dual voltage (power supply not included)
Power Consumption	12VDC, 500mA max. / 24VAC, 195mA max.
Operating Temperature...	-4° F - 140° F
Operating Humidity.....	20% - 95% RH
Unit Dimensions	3.94" (W) x 3.94" (H) x 8.27" (L)
Unit Weight	3.1 lbs
Certifications.....	FCC, RoHS

Optional Accessories



INTJBS
Square
Junction Box



INTCM
Corner/Pole
Adapter



CVCJBB
Bullet Camera
Junction Box



PSW4
24VAC
Power Supply



PSW5
12VDC
Power Supply

*To preserve signal quality and distance, Speco Technologies recommends using coax with a 100% copper center conductor and at least 95% braided copper shield. Speco Technologies is constantly developing and improving products. We reserve the right to modify product design and specifications without notice and without incurring any obligation. Spec Rev. 10/26/16.