


DS-2CE55C2N-IRM


720 TVL Picadis Outdoor IR Dome Camera

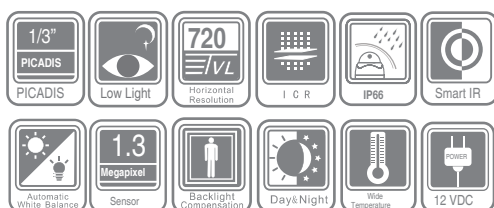

Key Features

- 1/3" Picadis
- 1.3 MP Sensor: 1280 x 960 Effective Pixels
- 720 TVL Horizontal Resolution
- True Day/Night
- 2.8 mm, 3.6 mm, 6 mm Fixed Lens, 0.1 Lux, $f/1.2$
- 20 Meters IR Range
- Smart IR, High Dynamic Range
- Superior Video Image Output and Ultra Low Light Illumination
- Wide Operating Temperature Range
- IP66 Weatherproof

Dimensions

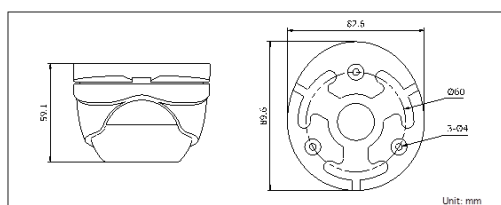

Accessories



DS-1229ZJ-1
(Wall Mount)



DS-1239ZJ-1
(Wall Mount)

DS-2CE55C2N-IRM	
Camera	
Image Sensor	1/3" Picadis
Signal System	NTSC
Effective Pixels	1280 × 960
Minimum Illumination	0.1 lux @ ($f/1.2$, AGC on), 0 lux with IR
Shutter Speed	NTSC: 1/30 s to 1/30,000 s
Lens	3.6 mm (2.8 mm, 6 mm optional)
	Angle of view: 71.4° (3.6 mm)
Lens Mount	M12
Angle Adjustment	Pan: 0° to 360°, tilt: 0° to 75°, rotation: 0° to 360°
Day/Night	IR cut filter with auto switch
Horizontal Resolution	720 TVL
Synchronization	Internal synchronization
Video Output	1 Vp-p composite output (75 Ω/BNC)
S/N Ratio	More than 62 dB
General	
Working Temperature/Humidity	-40° C to 60° C (-40° F to 140° F), Humidity 90% or less (non-condensing)
Power Supply	12 VDC
Power Consumption	Maximum 1.5 W (Maximum 4.5 W with IR cut filter on)
Ingress Protection	IP66
IR Range	20 meters
Dimensions	89.6 mm × 59.1 mm (3.53" × 2.33")
Weight	400 g (0.88 lbs)

Order Models

DS-2CE55C2N-IRM