


HD-TVI 2MP Intensifier® T Corner Mount Camera

CVC605CMT 3.6mm fixed board lens, stainless steel housing

Features

- Full HD resolution over coax (HD-TVI)
- Supports up to 1080p @ 30fps
- Perfect for elevators, hallways, etc.
- True wide dynamic range (WDR) operation (TVI output)
- Full OSD operation via UTC (TVI)
- Additional analog output for 960H
- Signal distance up to 1600 ft. (depending on coax quality)*
- 12VDC operation (power supply not included)
- 5 year warranty

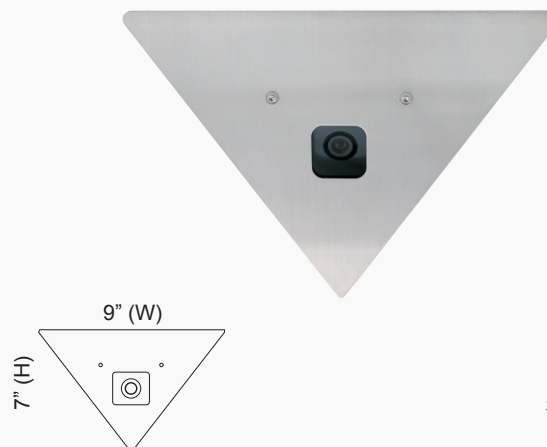

Camera Specifications

Image Sensor1/3" Sony CMOS, 2MP
Resolution.....1920 x 1080
Minimum Illumination.....F1.4, 0.001 lux (sense-up x32)
Effective Pixels1985 (H) x 1105 (V)
Total Pixels2001 (H) x 1121 (V)
Scanning System.....Progressive
S/N Ratio50dB
Video Output1.0Vp-p / 75 ohms
Electronic Shutter Speed.....Auto / Manual (1/25, 1/30 sec. - 1/300,000 sec.)
/ Flicker
Day/Night.....Auto / Color / BW / EXT
White BalanceAuto / AWB / AWC-SET / Manual
Brightness.....0 - 20
AGC.....0 - 20 (adjustable)

Camera Specifications (continued)

Motion Detection.....On / Off (4 zones)
Privacy.....On / Off (16 zones)
Mirror / V-Flip.....On / Off
Sharpness0 - 20 (adjustable)
Communication.....UTC

Operating & Unit Specifications

Power Supply12VDC power supply
(power supply not included)
Power Consumption12VDC, 100mA ±10% max.
Operating Temperature.....14° F – 122° F
Operating Humidity.....20% – 80% RH
Storage Temperature.....-4° F – 140° F
Dimensions.....9" (W) x 7" (H) x 4 (L)
Weight1.4 lbs.

Optional Accessories



PSW5
12VDC
Power Supply



TVIUTPPT
HD Video
Transceiver with
Pigtail (Balun)



TVIUPT
HD Video
Transceiver

*To preserve signal quality and distance, Speco Technologies recommends using coax with a 100% copper center conductor and at least 95% braided copper shield. Speco Technologies is constantly developing and improving products. We reserve the right to modify product design and specifications without notice and without incurring any obligation. Spec Rev. 7/6/17