

C5BV


5 MP HD Motorized VF EXIR Bullet Camera



Features

- 5MP, 2592x1944@20fps
- 2.8-12 mm motorized lens
- True WDR 120dB
- Support coax protocol
- Support OSD menu
- IR up to 132ft
- IP66

Dimensions

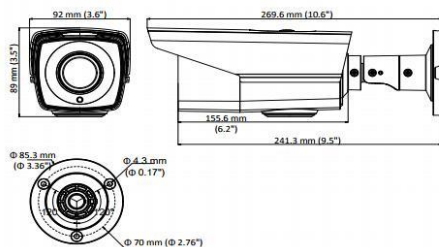

Order Model

C5BV

Camera	
Image Sensor	5MP CMOS Image Sensor
Signal System	PAL/NTSC
Effective Pixels	2592(H)*1944(V)
Min. Illumination	0.01 Lux @ (F1.2,AGC ON),0 Lux with IR
Shutter Time	1/25(1/30) s to 1/50,000 s
Lens	Motorized lens; 2.8 - 12 mm Angel of view: 27.7° - 86.8°
Lens Mount	φ14
Adjustment Range	Pan: 0 - 360° , Tilt: 0 - 90° , Rotation: 0 - 360°
Day& Night	IR cut filter with auto switch
Wide Dynamic Range	120dB
Video Frame Rate	2592×1944@20fps
HD Video Output	1 Analog HD output
Synchronization	Internal Synchronization
S/N Ratio	More than 62 dB
Up the Coax	Support
Menu	
D/N Mode	Auto / Color / B/W
BLC	Support
AGC	Support
Function	Brightness, Sharpness, Digital noise reduction, Mirror, Bad pixel correction, Smart IR
General	
Operating Conditions	-40 ° F - 140 ° F Humidity 90% or less (non-condensing)
Power Supply	12 VDC±20% 24 VAC±20%
Power Consumption	Max. 9W
Weather Proof	IP67
IR Range	Up to 132ft
Communication	Up the coax Protocol: HIKVISION-C(Coaxitron)
Dimension	3.62" × 3.34" × 3.34"
Weight	1.98lbs

* Product specifications may change without prior notice.

