


Platinum HD-TVI Dome Camera 5MP CMHD7352-28



Key Features:

- 5MP Ultra Low Light
- 2560x1944@20fps
- 2.8mm Fixed Lens
- 0.008 Lux @ F1.2
- 2 Matrix IR up to 65ft(20m)
- DC 12V
- OSD Menu via UTC technology with Platinum TVI DVR
- IP67, IK10
- 3-axis

Dimensions:

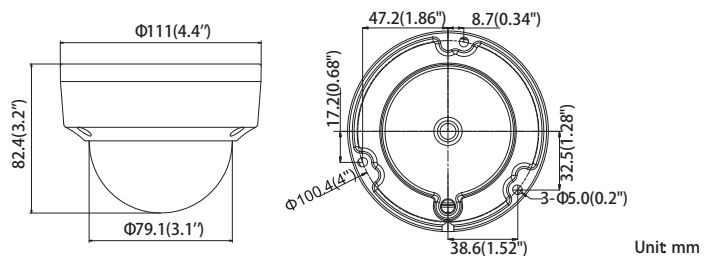

Platinum HD-TVI Dome Camera 5MP

CMHD7352-28

CAMERA	
Image Sensor	1/2.7"CMOS
Signal System	NTSC/PAL
Effective Pixels	2560(H)*1944(V)
Min. Illumination	0.008 Lux, 0 Lux with IR
Shutter Speed	1/30(1/25) s to 1/50,000 s
Lens	2.8mm Angle of View: 91°
Day & Night	ICR
Synchronization	Internal
Video Frame Rate	2560 x 1944@20fps
HD Video Output	1 HD-TVI Output
S/N Ratio	More than 62dB
MENU	
AGC	Support
D/N Mode	Auto/ Color/BW
White Balance	ATW/ NWB
BLC	Support
3D DNR	Support
Language	English, Chinese
Functions	Brightness,Sharpness,Digital noise reduction,Mirror,Smart IR
GENERAL	
Working Temperature /Humidity	-40 ° F - 140 ° F (-40° C - 60 ° C) Humidity 90% or less (non-condensing)
Power Supply	DC 12V
Power Consumption	Max. 3W
Impact Protection	IK10
Weather Proof Ratings	IP67
IR Range	Up to 65ft(20m)
Dimension	4.4 " × 3.3" (111.0×82.5 mm)
Weight	0.8lb(350g)