

X2SBLZ


2MP WDR Smart IP Bullet Camera



Features

- 2.1MP, 1920x1080@60fps
- 4.7 mm to 94 mm 20X zoom motorized lens
- Full HD1080p Video, up to 60 fps Frame Rate
- 120dB WDR, IR up to 394ft
- Support on-board storage up to 128GB, IP67
- Audio/alarm I/O, built-in heater

Dimensions

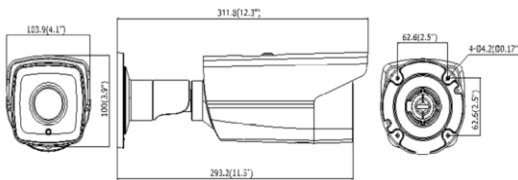

| | |
|-----------------------------|---|
| Camera | |
| Image Sensor | 1/2.8" Progressive Scan CMOS |
| Min. Illumination | 0.002 Lux @ (F1.2, AGC ON), 0.0027 Lux @ (F1.4, AGC ON), 0 Lux with IR |
| Shutter time | 1/3s ~ 1/100,000s, Supports slow shutter* |
| Lens | 4.7-94mm @ F1.4 angle of view:53.8° ~3.1° |
| Auto Iris | DC drive |
| Day& Night | IR cut filter with auto switch |
| Wide Dynamic Range | 120 dB |
| Compression Standard | |
| Video Compression | H.264+/H.264/MPEG4/MJPEG |
| H.264 code profile | Baseline Profile / Main Profile / High Profile |
| Video bit rate | 32Kbps~16Mbps |
| Triple Streams | Yes |
| Audio Compression | G.711/G.722.1/G.726/MP2L2 |
| Audio Bit Rate | 64Kbps (G.711) /16Kbps (G.722.1) /16Kbps (G.726) /32-160Kbps (MP2L2) |
| Image | |
| Max. Image Resolution | 1920 x 1080 |
| Frame Rate | 50Hz: 50fps(1920 x 1080, 1280 x 960, 1280 x 720) 60Hz: 60fps (1920 x 1080, 1280 x 960, 1280 x 720) |
| Image Enhancement | BLC/3D DNR/ROI/Defog/EIS |
| Image Settings | Rotate Mode, Saturation, Brightness, Contrast, Sharpness adjustable by client soft ware or web browser |
| Distortion Correction | Support |
| Regional Cropping | Support |
| Picture Overlay | LOGO picture can be overlaid with 128x128 24bit bmp format |
| Day/Night Switch | Auto/Schedule/Triggered by Alarm In |
| Network | |
| Network Storage | Micro SD/SDHC/SDXC card with ANR (up to 128G), NAS (Support NFS, SMB/CIFS) |
| Alarm Trigger | Line crossing detection, Intrusion detection, scene change detection, audio exception detection, Defocus detection, Motion detection, Face detection, Dynamic analysis, Tampering alarm, Network disconnect, IP address conflict, Storage exception |
| Protocols | TCP/IP, UDP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PP PoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IPv6, Bonjour |
| General Function | User Authentication, Watermark, IP address filtering, Anonymous access |
| System Compatibility | ONVIF (Profile S, Profile G), PSIA, CGI, ISAPI |
| Interface | |
| Communication | 1 RJ45 10M / 100M Ethernet |
| Audio/Alarm | 1 Audio I(line in/mic in)/O, 1 Alarm I/O |
| Video Output | 1Vp-p Composite Output (75 Ω, BNC) |
| On-board storage | Built-in Micro SD/SDHC/SDXC slot, up to 128 GB |
| Reset Button | Yes |
| Smart Feature-set | |
| Behavior Analysis | Line crossing detection, Intrusion detection, Region entrance, Region exiting, Unattended baggage, Object removal |
| Exception Detections | Scene change detection, Sudden audio increase/decrease detection, Audio loss detection, Defocus detection |
| Recognition | Face detection recognition |
| Statistics | Object Counting (Entrance and Exit object number is accounted and showed on screen in real time) |
| General | |
| Operating Conditions | -22 ° F to 140 ° F, Humidity 95% or less (non-condensing) -40 ° F to 140 ° F with smart heater on |
| Power Supply | 12 VDC ± 10%, PoE (802.3at, class 4) |
| Power Consumption | Max. 21 W |
| Weather Proof | IP67 |
| IR Range | Up to 394ft |
| Dimensions | 3.94" × 4.09" × 12.28" |
| Weight | 4.41lbs |

Order Model

X2SBLZ

* Product specifications may change without prior notice.

