

HRD-841

8CH 4M Analog HD DVR




Key Features

- 8CH 4MP AHD DVR
- TVI, CVI (Max. 2MP), Analog camera input
- Up to 120 / 100 (4MP)fps recording rate
- Up to 240 / 200 (1080p)fps recording rate
- HDMI / VGA video output
- 4CH audio input / 1CH audio output
- Up to 2 internal HDDs (Max. 12TB)
- Coaxial cable (Pelco-C, ACP)
- Smartphone support

Dimensions

Unit: mm (inch)

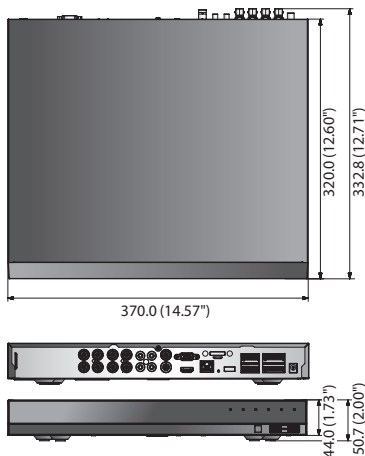

HRD-841		
DISPLAY		
Video	Inputs	8channel BNC : AHD (2MP, 4MP), TVI (2MP), CVI (2MP), NTSC / PAL
	Resolution	2560 x 1440, 1920 x 1080, 1280 x 720, 960 x 480, 704 x 480 / 960 x 576, 704 x 576
Live	Frame Rate	240fps / 200fps
	Resolution	2560 x 1440, 1920 x 1080, 1280 x 720, 960 x 480, 704 x 480 / 960 x 576, 704 x 576
	Multi Screen Display	1 / 4 / 7 / 9 / PIP / Sequence
PERFORMANCE		
Operating System	Embedded	Linux
	Compression	H.264
Recording	Record Rate (Analog)	NTSC : Up to 120fps@4MP / PAL : Up to 100fps@4MP NTSC : Up to 240fps@1920 x 1080 / PAL : Up to 200fps@1920 x 1080 NTSC : Up to 240fps@1280 x 720, 928 x 480, 704 x 480, 704 x 240, 352 x 240 PAL : Up to 200fps@1280 x 720, 928 x 576, 704 x 576, 704 x 288, 352 x 288
	Mode	Manual, Schedule (Continuous / Event), Event (Pre / Post), Time lapse (1 ~ 30 fps (N), 1 ~ 25fps (P))
	Event	Video Loss, Motion (Level 1 ~ 10), Alarm, Tampering (Level Low, Medium, High)
	Overwrite Modes	Continuous
	Pre-alarm	Up to 30 sec (5, 10, 20, 30 Sec)
	Post-alarm	Up to 6 hour (5, 10, 20, 30 Sec, 1, 3, 5, 10, 20 min, 1, 2, 3, 4, 5, 6 hour)
Search & Playback	Search Mode	Date / time, Event, Back up, Motion (※ All Search Included Preview Function)
	Playback Function	Fast forward / Backward (2x, 4x, 8x, 16x, 32x, 64x) *Backward play with I-frame only Slow forward / Backward (1/2x, 1/4x, 1/8x) Step Forward / Backward ※ Backward Play with I-frame only
Network (IPv4)	Transmission Speed	Record (Main) Stream 4MP : 15fps / CH, 1080p / 720p / WD1 / 4CIF / CIF : 30fps / CH (N), 25fps / CH (P) Network (Sub) Stream WD1 / 4CIF : 12fps / CH, 2CIF / CIF : 30fps / CH (N), 25fps / CH (P)
	Bandwidth	Up to 64Mbps
	Bandwidth Control	Selectable
	Stream	Record stream and network stream selectable (at monitoring viewer)
Smart Phone	Max. Remote Users	Search (3) / Live Unicast (10) / Live Multicast (20)
	Protocol Support	TCP/IP, DHCP, PPPoE, SMTP, NTP, HTTP, DDNS, RTP, RTSP, SNMP
	Monitoring	SSM, Webviewer, SmartViewer, iPOLiS mobile viewer
	Platform	Android, iOS
Storage	Protocol Support	RTP, RTSP, HTTP
	Control	Live (8ch) : Multi-Profile Support Playback (1ch)
	Max. Remote Users	Search (3), Live Unicast (10), Multicast (20)
Storage	Internal HDD	Up to 2 SATA HDDs (0 ~ 6TB HDD)
	External (e-SATA Interface)	e-SATA, USB (for Backup)
	File Format (Backup)	BU (DVR player), SEC (Include player), AVI
Security	Password Protection	1 Admin, 10 group, 10 User per 1 group
	Data Authentication	Watermark
INTERFACE		
Monitors	VGA	1 VGA (1920 x 1080, 1280 x 1024, 1280 x 720)
	HDMI	1 HDMI (4K (3840 x 2160), 2K (2560 x 1440), 1920 x 1080, 1280 x 1024, 1280 x 720)
Audio	Spot Composite	BNC (1CH) ※ Included OSD on screen, Multi mode support
	Inputs / Output	4CH line in / 1CH line out
	Compression	G.711
Alarm	Sampling Rate	8KHz
	Inputs / Output	Terminal 8 inputs (NO/NC) / Terminal 4 relay outputs (NO/NC), Rating : 30V DC/2A, 250V AC/0.25A
	Remote Notification	Notification Via e-mail
Connections	Ethernet	1 RJ45 10/100/1000 Base-T
	Serial Interface	RS-485 (Half Duplex) for PTZ, Samsung System Keyboard
	USB	1 ports (USB 3.0, Rear), 1 ports (USB 2.0, Front)
	e-SATA	1 External SATA port
	Application Support	Mouse, IR remotecon
	RS-485 Protocol	Samsung-E / Samsung-T / Pelco-D / Pelco-p / Panasonic / Phillips / AD / DIAMOND / ERNA / KALATEL / VCL TP / VICON / ELMO / GE
GENERAL	Coax Protocol	NTSC / PAL : Pelco-C (Coaxitron), AHD : ACP (AHD Coax Protocol)
	GENERAL	
Electrical	Input Voltage / Current	12V DC adaptor (100 ~ 250V AC ±10%, 50/60Hz)
	Power Consumption	Max. 23W (1 x 3TB HDD)
Environmental	Operating Temperature	+0°C ~ +40°C (+32°F ~ +104°F)
	Operating Humidity	20% ~ 85% RH
Mechanical	Dimensions (WxHxD)	370.0 x 44.0 x 320.0mm (14.57" x 1.73" x 12.6")
	Weight (With hard disks)	Approx. 2.91kg (6.42 lb) (with 3TB HDDs)
LANGUAGE	GUI	English, French, German, Spanish, Italian, Russian, Polish, Czech, Turkish, Netherlands, Portuguese, Swedish, Danish, Rumania, Serbia, Croatia, Hungary, Greek, Finnish, Norwegian, Korean, Japanese, Chinese (Traditional), Thai, Taiwanese (25 Language)
	Web Browser	English, French, German, Italian, Spanish, Russian, Turkish, Polish, Dutch, Swedish, Czech, Portuguese, Danish, Rumanian, Serbian, Croatian, Hungarian, Greek, Norwegian, Finnish, Korean, Chinese (Simplified), Japanese, Thai (23 Language)

 * The latest product information / specification can be found at hanwha-security.com

* Design and specifications are subject to change without notice.

* Wisenet is the proprietary brand of Hanwha Techwin, formerly known as Samsung Techwin.