

## Pace1STR

### IP and PoE+ over Extended Distance CAT5e Solution

#### Description


Altronix Pace1STR is a long range Ethernet adapter kit that transmits data at 100Mbps full duplex and power via CAT5e or higher cable in a PoE(+) compliant format. The Pace1PRM receiver is powered via a PoE midspan, such as the Altronix Netway series, or by an endspan. The receiver passes the PoE(+) compliant power over the cable to the Pace1ST mini transceiver which, in turn, passes this power to an enabled IP camera/device. These plug and play units facilitate cost-effective solutions for IP devices that need to be installed at distances greater than 100m.



#### Key Features

- IEEE 802.3af (15W) and IEEE 802.3at (30W).
- Throughput is rated to pass 100Mbps at distances up to 500m.
- Eliminates the costs and labor associated with installing new network cabling.
- Retrofit digital IP cameras in an analog CCTV installation.
- Auto detection and protection of legacy non-PoE cameras/devices.
- Works with Megapixel, HD720, HD1080 & VGA (SD) cameras.
- Extends Network link distance in an industrial environment.
- Retrofit digital IP cameras in an analog CCTV CAT5e wired installations.
- UL Listed in the U.S. and Canada.
- CE Approved.
- Lifetime Warranty / Made in the U.S.A.

#### Typical Operation Diagram

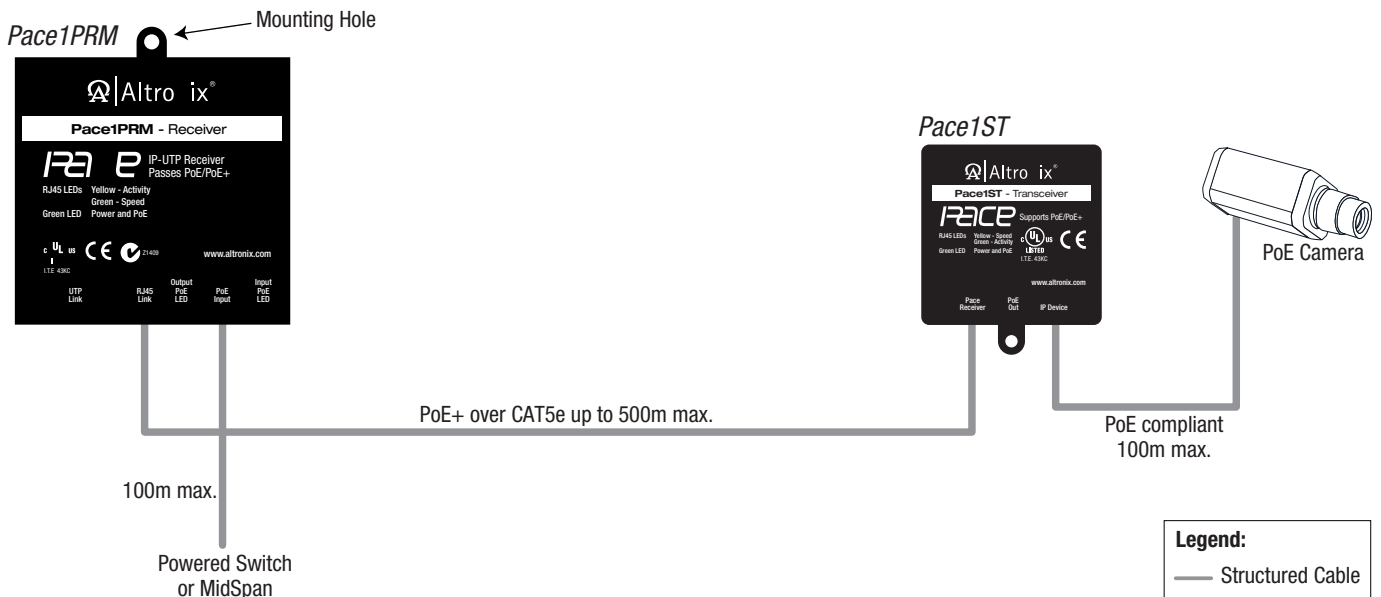



## Pace1STR

### IP and PoE+ over Extended Distance CAT5e Solution

#### Specifications

##### Input

Pace1PRM:	Powered by midspan or endspan.
Pace1ST:	Powered by Pace1PRM.

##### Ethernet

Connectivity: RJ45, auto-crossover.  
Wire type: 4-pair CAT5 or better structured cable.  
Speed: 10/100BaseT, half/full duplex, auto negotiation.  
Distance: up to 500m.  
Throughput is rated to pass 100Mbps of data.  
With proper headend equipment multiple Megapixel cameras can be used.

##### Indicators (LED)

Green LED:	PoE ON.
Yellow and Green LED (by RJ45 jack):	IP Link status, 10/100Base-T/active.

##### Agency Listings

UL/cUL	UL60950-1 (Information Technology Equipment).
CE	European Conformity.

##### Physical and Environmental

###### Dimensions (W x L x H)

Pace1PRM:	3.5" x 3.5" x 1" (88.89mm x 88.89mm x 25.4mm).
Pace1ST:	2.27" x 2.645" x 1.12" (57.66mm x 67.18mm x 28.44mm).

###### Weight (approx.)

Product Weight	0.4 lbs. (0.18 kg).
Shipping Weight	1 lbs. (0.45 kg).

###### Temperature

Operating:	
Pace1PRM:	-20°C to 49°C (-4°F to 120.2°F).
Pace1ST:	
	For 15W: -40°C to 75°C (-40°F to 167°F).
	For 30W: -40°C to 49°C (-40°F to 120°F).

Storage:	-40°C to 75°C (-40° to 167°F).
----------	--------------------------------

Relative Humidity	85% +/-5%.
-------------------	------------

Operating Altitude:	-304.8 to 2,000m.
---------------------	-------------------