

## Axis Optional Lenses

Lenses for special surveillance demands



- > Tested and approved for Axis cameras
- > Extended surveillance possibilities
- > Excellent image quality maintained

Axis network cameras are equipped with carefully selected lenses to provide the best possible performance and durability. Axis also offers various optional lenses for adverse circumstances or for meeting special surveillance requirements.

Natural obstacles, adverse conditions, or the need for semi-covert surveillance can place extraordinary demands on surveillance equipment. Axis therefore supplies a range of tested and approved optional lenses for meeting requirements on wide angle viewing, magnification, and reduction of barrel distortion.

Axis optional lenses are available for network cameras with M12 mounts or CS mounts.

Axis offers lenses for both megapixel cameras and day-and-night cameras, thus extending surveillance possibilities whilst maintaining excellent image quality.



# Considerations to take into account when replacing a lens

## Field of view

The field of view is the area of coverage and the degree of detail to be viewed. The field of view is determined by the focal length of the lens and the size of the image sensor.


The longer the focal length, the narrower the field of view. The fastest way to find out what focal length lens is required for a desired field of view is to use a rotating lens calculator or an online lens calculator, both of which are available from Axis Communications:

[www.axis.com/techsup/cam\\_servers/lens\\_calculators/index.htm](http://www.axis.com/techsup/cam_servers/lens_calculators/index.htm)

## Matching lens and sensor

If a network camera offers an exchangeable lens, it is important to select a lens suitable for the camera. If a lens is made for a smaller image sensor than the one that is actually fitted inside the camera, the image will have black corners (see left-hand illustration below). If a lens is made for a larger image sensor than the one that is actually fitted inside the camera, the field of view will be smaller than the lens' capability since part of the information will be "lost" outside the image sensor (see right-hand illustration).

*Examples of different lenses mounted onto a 1/3-inch image sensor.*

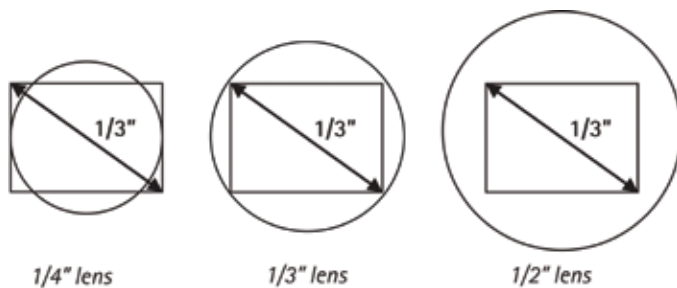

When replacing a lens on a megapixel camera, a high quality lens is required since megapixel sensors have pixels that are much smaller than those on a VGA sensor (640x480 pixels). It is best to match the lens resolution to the camera resolution in order to fully use the camera's capability.

## Lens mount standards

When changing a lens, it is also important to know what type of lens mount the network camera has. There are three main standards used on network cameras:

- > CS-mount
- > C-mount
- > M12-mount

If it is impossible to focus a camera, it is likely that the wrong type of lens is used.

## F-number and exposure

In low-light situations, particularly in indoor environments, an important factor to look for in a network camera is the lens' light-gathering ability. This can be determined by the lens' f-number, also known as f-stop. An f-number defines how much light can pass through a lens.

The smaller the f-number the better the lens' light gathering ability; i.e. more light can pass through the lens to the image sensor. In low-light situations, a smaller f-number generally produces a better image quality. A higher f-number, on the other hand, increases the depth of field.


## Fixed or adjustable iris

An iris is used to maintain the optimum light level to the image sensor so that images can be sharp, clear and correctly exposed with good contrast and resolution. If the network camera has been designed with an iris control, the lens needs also to match the same specification. Iris control can be fixed or adjustable. More details on the type of iris control (fixed, manual, auto iris or P-Iris) can be found here:


[www.axis.com/products/video/camera/about\\_cameras/iris.htm](http://www.axis.com/products/video/camera/about_cameras/iris.htm)

## IR corrected lens

IR-corrected lenses are not very beneficial for cameras that do not have a removable infrared-cut filter. This is used to filter out infrared (IR) light so that it does not distort the colors of images as the human eye sees them. However, day/night cameras—used mostly for outdoor applications or in areas with poor lighting—can greatly benefit from IR-corrected lenses. Day/night cameras automatically remove an IR-cut filter in low-light conditions to take advantage of invisible, near-infrared light. Since the wavelength of IR light differs from visible light, the focus point of IR light will differ from the focus point of visible light. Consequently, when the focus is set during daytime, the picture will not be in focus at nighttime when using IR light.

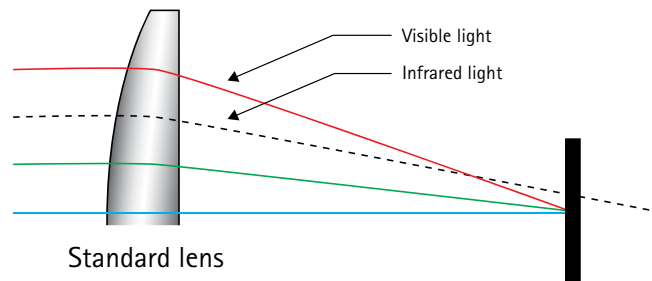

The problem can be rectified by using IR-corrected lens, which focuses both the visible and the infrared light in the same vertical plane.

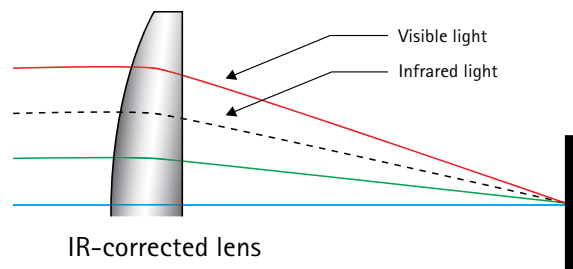

For more information, see

[www.axis.com/products/video/camera/about\\_cameras/lens.htm](http://www.axis.com/products/video/camera/about_cameras/lens.htm)

## Technical specifications – Axis Optional Lenses

### Megapixel Lens 2.8 mm (5502 101)

<b>Description</b>	Megapixel lens
<b>Mount</b>	M12 mount
<b>Focal length</b>	2.8 mm
<b>Aperture</b>	F 2.6
<b>Sensor format &amp; horizontal angle of view</b>	1/4" sensor: 78° (AXIS M3011) 1/4" sensor: 84° (AXIS M3014, M3114-R) 1/4" sensor: 68° (AXIS M3113-R)
<b>Supported cameras</b>	AXIS M3011, AXIS M3014, AXIS M3113-R, AXIS M3114-R
<b>Dimensions (L x Ø)</b>	16 x 14 mm (0.6" x 0.5")

### Megapixel Lens 3.6 mm (5502 151)

<b>Description</b>	Megapixel lens
<b>Mount</b>	M12 mount
<b>Focal length</b>	3.6 mm
<b>Aperture</b>	F 1.8
<b>Sensor format &amp; horizontal angle of view</b>	1/4" sensor: 56° (AXIS M3011) 1/4" sensor: 62° (AXIS M3014, M3114-R) 1/4" sensor: 49° (AXIS M3113-R)
<b>Supported cameras</b>	AXIS M3011, AXIS M3014, AXIS M3113-R, AXIS M3114-R
<b>Dimensions (L x Ø)</b>	17 x 14 mm (0.7" x 0.5")

### Megapixel Lens 6 mm (5502 111)

<b>Description</b>	Megapixel lens
<b>Mount</b>	M12 mount
<b>Focal length</b>	6 mm
<b>Aperture</b>	F 2.0
<b>Sensor format &amp; horizontal angle of view</b>	1/4" sensor: 34° (AXIS M3011) 1/4" sensor: 38° (AXIS M3014, M3114-R) 1/4" sensor: 30° (AXIS M3113-R)
<b>Supported cameras</b>	AXIS M3011, AXIS M3014, AXIS M3113-R, AXIS M3114-R
<b>Dimensions (L x Ø)</b>	17 x 14 mm (0.7" x 0.5")

### Megapixel Lens 6 mm (5503 651)

<b>Description</b>	Megapixel lens, fixed iris
<b>Mount</b>	M12 mount
<b>Focal length</b>	6 mm
<b>Aperture</b>	F 1.6
<b>Sensor format &amp; horizontal angle of view</b>	1/4" sensor: 35° (AXIS M3004-V) 1/2.7" sensor: 54° (AXIS M3005-V)
<b>Supported cameras</b>	AXIS M3004-V, AXIS M3005-V
<b>Dimensions (L x Ø)</b>	18 x 14 mm (0.7" x 0.5")

### Megapixel Lens 8 mm (5502 411)

<b>Description</b>	Megapixel lens for optional angle view
<b>Mount</b>	M12 mount
<b>Focal length</b>	8 mm
<b>Aperture</b>	F 1.8
<b>Sensor format &amp; horizontal angle of view</b>	1/4" sensor: 26° (AXIS M3011) 1/4" sensor: 28° (AXIS M3014, M3114-R) 1/4" sensor: 23° (AXIS M3113-R)
<b>Supported cameras</b>	AXIS M3011, AXIS M3014, AXIS M3113-R, AXIS M3114-R
<b>Dimensions (L x Ø)</b>	17.4 x 14 mm (0.7" x 0.5")

### Megapixel Lens 16 mm (5502 161)

<b>Description</b>	Megapixel lens
<b>Mount</b>	M12 mount
<b>Focal length</b>	16 mm
<b>Aperture</b>	F 1.8
<b>Sensor format &amp; horizontal angle of view</b>	1/4" sensor: 12° (AXIS M3011) 1/4" sensor: 13° (AXIS M3014, M3114-R) 1/4" sensor: 10° (AXIS M3113-R)
<b>Supported cameras</b>	AXIS M3011, AXIS M3014, AXIS M3113-R, AXIS M3114-R
<b>Dimensions (L x Ø)</b>	16 x 14 mm (0.6" x 0.5")

### Manual iris Varifocal Lens 2.4 – 6 mm (5503 181)

<b>Description</b>	Against flickering in fluorescent illumination
<b>Mount</b>	CS mount
<b>Focal length</b>	2.4 – 6 mm
<b>Aperture</b>	F 1.6
<b>Sensor format &amp; horizontal angle of view</b>	1/4" sensor: 70° – 30° (AXIS M1103) 1/4" sensor: 81° – 35° (AXIS M1104)
<b>Supported cameras</b>	AXIS M1103, AXIS M1104
<b>Dimensions (L x Ø)</b>	37.1 x 32.5 mm (1.5" x 1.3")

### Evetar Fixed iris Megapixel Lens 16 mm (5502 741)

<b>Description</b>	High-definition megapixel lens
<b>Mount</b>	CS mount
<b>Focal length</b>	16 mm
<b>Aperture</b>	F 1.8
<b>Sensor format &amp; horizontal angle of view</b>	1/4" sensor: 12° (AXIS M1103) 1/4" sensor: 15° (AXIS M1104)
<b>Supported cameras</b>	AXIS M1103, AXIS M1104
<b>Dimensions (L x Ø)</b>	15 x 30 mm (0.6" x 1.2")

### Fujinon Varifocal Megapixel Lens 2.2 – 6 mm (5502 751)

<b>Description</b>	DC iris lens with wider viewing angle
<b>Mount</b>	CS mount
<b>Focal length</b>	2.2 – 6 mm
<b>Aperture</b>	F 1.3
<b>Sensor format &amp; horizontal angle of view</b>	1/4" sensor: 84° – 32° (AXIS M1113/-E) 1/4" sensor: 100° – 40° (AXIS M1114/-E)
<b>Supported cameras</b>	AXIS M1113/-E, AXIS M1114/-E
<b>Dimensions (L x Ø)</b>	54 x 38 mm (2.1" x 1.5")

### Fujinon Varifocal Megapixel Lens 15 – 50 mm (5502 761)

<b>Description</b>	For accurate and detailed information acquisition
<b>Mount</b>	CS mount
<b>Focal length</b>	15 – 50 mm
<b>Aperture</b>	F 1.5
<b>Sensor format &amp; horizontal angle of view</b>	1/4" sensor: 15° – 4° (AXIS M1113/-E) 1/4" sensor: 21° – 5° (AXIS M1114/-E)
<b>Supported cameras</b>	AXIS M1113/-E, AXIS M1114/-E
<b>Dimensions (L x Ø)</b>	59 x 38 mm (2.3" x 1.5")

## Technical specifications – Axis Optional Lenses

M12 mount Megapixel 6 mm (5503 651)	
<b>Description</b>	IR coated for optimal color reproduction
<b>Mount</b>	M12 mount
<b>Focal length</b>	6 mm
<b>Aperture</b>	F 1.6
<b>Sensor format &amp; horizontal angle of view*</b>	1/4" sensor: 34° 1/2.7" sensor: 54°
<b>Supported cameras</b>	AXIS M3004-V, AXIS M3005-V
<b>Dimensions (L x Ø)</b>	18 x 28 mm (0.7" x 1.1")
Fujinon 2.2 – 6 (5800 781)	
<b>Description</b>	Wide angle lens designed for day & night cameras. IR corrected lens
<b>Mount</b>	CS mount
<b>Focal length</b>	2.2 – 6 mm
<b>Aperture</b>	F 1.3
<b>Sensor format &amp; horizontal angle of view*</b>	1/2.8" sensor: 124° – 50° 1/3" sensor: 111° – 47° 1/3.2" sensor: 105° – 43°
<b>Supported cameras</b>	AXIS P13 Series, AXIS Q1602/-E, AXIS Q1604/-E
<b>Dimensions (L x Ø)</b>	57 x 49 mm (2.2" x 1.9")
Computar 12.5 – 50 mm, DC iris (5800 791)	
<b>Description</b>	DC-iris telephoto lens for day & night cameras. IR corrected lens
<b>Mount</b>	CS mount
<b>Focal length</b>	12.5 – 50 mm
<b>Aperture</b>	F 1.4
<b>Sensor format &amp; horizontal angle of view</b>	1/3" sensor: 20° – 6°
<b>Supported cameras</b>	AXIS P1353/-E, AXIS P1354/-E, AXIS Q1602/-E, AXIS Q1604/-E
<b>Dimensions (L x Ø)</b>	58 x 46 mm (2.3" x 1.8")
Computar 12.5 – 50, P Iris (5800 801)	
<b>Description</b>	P-Iris telephoto lens for day & night cameras. IR corrected lens
<b>Mount</b>	CS mount
<b>Focal length</b>	12.5 – 50 mm
<b>Aperture</b>	F 1.4
<b>Sensor format &amp; horizontal angle of view*</b>	1/2.8" sensor: 23° – 7° 1/3.2" sensor: 19° – 6°
<b>Supported cameras</b>	AXIS P1355/-E, AXIS P1357/-E
<b>Dimensions (L x Ø)</b>	59 x 46 mm (2.3" x 1.8")
Kowa Varifocal Lens 9 – 20mm D/N (5502 801)	
<b>Description</b>	Multi-megapixel varifocal P-Iris lens designed for day & night. IR corrected lens
<b>Mount</b>	CS mount
<b>Focal length</b>	9 – 20 mm
<b>Aperture</b>	F 1.6
<b>Sensor format &amp; horizontal angle of view</b>	1/3" sensor: 28° – 15° 1/2.8" sensor: 28° – 16°
<b>Supported cameras</b>	AXIS P1355/-E, AXIS Q1604/-E
<b>Dimensions (L x Ø)</b>	69 x 37 mm (2.7" x 1.4")

Theia Varifocal Ultra Wide Lens 1.8 – 3.0 mm (5503 161)	
<b>Description</b>	Designed for ultra wide field of view
<b>Mount</b>	CS mount
<b>Focal length</b>	1.8 – 3.0 mm
<b>Aperture</b>	F 1.8
<b>Sensor format &amp; horizontal angle of view</b>	1/3" sensor: 105° – 80° 1/2.8" sensor: 111° – 85° 1/3.2" sensor: 102° – 76°
<b>Supported cameras</b>	AXIS P1353/-E, AXIS P1354/-E, AXIS P1355/-E, AXIS P1357/-E, AXIS Q1602/-E, AXIS Q1604/-E
<b>Dimensions (L x Ø)</b>	49.3" x 15.6 mm (1.9" x 0.6") <i>*Depending on zoom position</i>
Theia Varifocal Telephoto Lens 9 – 40 mm (5503 171)	
<b>Description</b>	Telephoto lens for objects far away
<b>Mount</b>	CS mount
<b>Focal length</b>	9 – 40 mm
<b>Aperture</b>	F 1.5
<b>Sensor format &amp; horizontal angle of view</b>	1/3" sensor: 29° – 8° (AXIS P1354/-E) 1/2.8" sensor: 32° – 9° (AXIS P1355/-E) 1/3.2" sensor: 27° – 7° (AXIS P1357/-E) 1/3" sensor: 29° – 8° (AXIS Q1602/-E) 1/3" sensor: 29° – 8° (AXIS Q1604/-E)
<b>Supported cameras</b>	AXIS P1354/-E, AXIS P1355/-E, AXIS P1357/-E, AXIS Q1602/-E, AXIS Q1604/-E
<b>Dimensions (L x Ø)</b>	49.3 x 25.5 mm (1.9" x 1")
Fujinon Varifocal Lens 15 – 50 mm (5503 421)	
<b>Description</b>	Designed for high sensitivity cameras to maximize optical performance
<b>Mount</b>	CS mount
<b>Focal length</b>	15 – 50 mm
<b>Aperture</b>	F 1.5
<b>Sensor format &amp; horizontal angle of view</b>	1/3" sensor: 18° – 6°
<b>Supported cameras</b>	AXIS P1353/-E, AXIS P1354/-E, AXIS Q1602/-E, AXIS Q1604/-E
<b>Dimensions (L x Ø)</b>	58.5 x 37.5 mm (2.3" x 1.5")
Raynox Conversion Lens 0.5x zoom (5500 501)	
<b>Description</b>	Wide angle conversion lens
<b>Mount</b>	M37 mount
<b>Zoom</b>	0.5x
<b>Supported cameras</b>	AXIS Q1755
<b>Dimensions (L x Ø)</b>	40 x 62 mm (1.6" x 2.4")
Raynox Conversion Lens 2.2x zoom (5500 511)	
<b>Description</b>	High-Definition telephoto conversion lens
<b>Mount</b>	M37 mount
<b>Zoom</b>	2.2x
<b>Sensor format &amp; horizontal angle of view</b>	1/3" sensor: 3.1° – 1.2°
<b>Supported cameras</b>	AXIS Q1755
<b>Dimensions (L x Ø)</b>	73 x 55 mm (2.9" x 2.2")

More information is available at [www.axis.com/accessories](http://www.axis.com/accessories)