


HYBRID PROFESSIONAL LED CCTV MONITOR

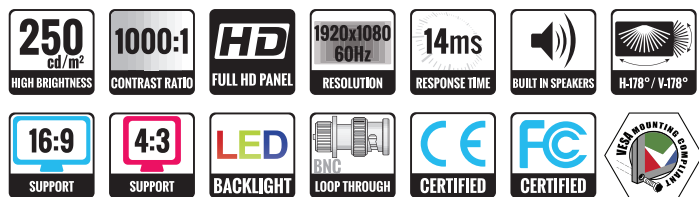


MODEL # VZ-24CMX	
VIDEO	
Screen Size	23.6"
Max. Resolution	1920 x 1080 @60Hz
Pixel Pitch	0.215 mm x 0.215 mm
Brightness	250cd/m²(Typical)
Contrast Ratio	1000:1
Aspect Ratio	16:9
Viewing Angle (H/V)	178° / 178°
Display Color	16.7 Million
Response Time	< 14ms
Video System	NTSC / PAL
Frequency (H)	30 ~ 80 kHz
Frequency (V)	56 ~ 75 Hz
INTERFACE	
AV (AHD, TVI, CVI) In / Out	1 / 1
AV (CVBS) In / Out	1 / 1
VGA In (15Pin D-Sub)	1
HDMI In	1
PC Audio In / AV Audio In	1 / 1
AUDIO	
Built in speaker	3W X 2
SPECIAL FEATURES	
Filter Type	3D Comb-filter / De-Interlace
Hybrid Input - AHD, TVI, CVI	Support
Analog Video Resolution (Max)	600 TV Line
Language	English, Deutsch, French, Spanish, Italian
DIMENSIONS & WEIGHT	
Outline Dimension (W x H x D)	21.88" x 15.68" x 1.94" 555.90 mm x 398.47 mm x 49.5 mm
Net Weight / Gross Weight	11.02 lb (5.0 kg) / 13.66 lb (6.2 kg)
MOUNT	
VESA	100mm x 100mm (M4 x L8 screws)
GENERAL	
Power	DC 12V, 3A (AC 100-240V, 50/60Hz)
Electrical Ratings Consumption	28 W
Operating Temperature Humidity	14 ~ 122°F / -10 ~ 50°C 20 ~ 70% RH
Regulations	FCC(A), CE, RoHs
Compatible Mounts	WALL CEILING RACK
	VZ-WM05, VZ-WM11, VZ-AM01, VZ-AM02 VZ-CMKIT-01 VZ-RMK08


VZ-24CMX ADVANTAGES

- 23.6" Full HD Resolution
- 3D Comb-filter, De-Interlace
- 16:9 / 4:3 Ratio Available, HDMI, VGA, PC Audio, AV Audio
- 1 Hybrid AV (AHD2.0 / HD-TVI / HD-CVI) Input / Output (Loop-through)
- 1 AV (CVBS) Input / Output (Loop-through)
- Built-in Speakers, Auto Source & Power Recovery
- 3-Year Warranty

DIMENSIONS

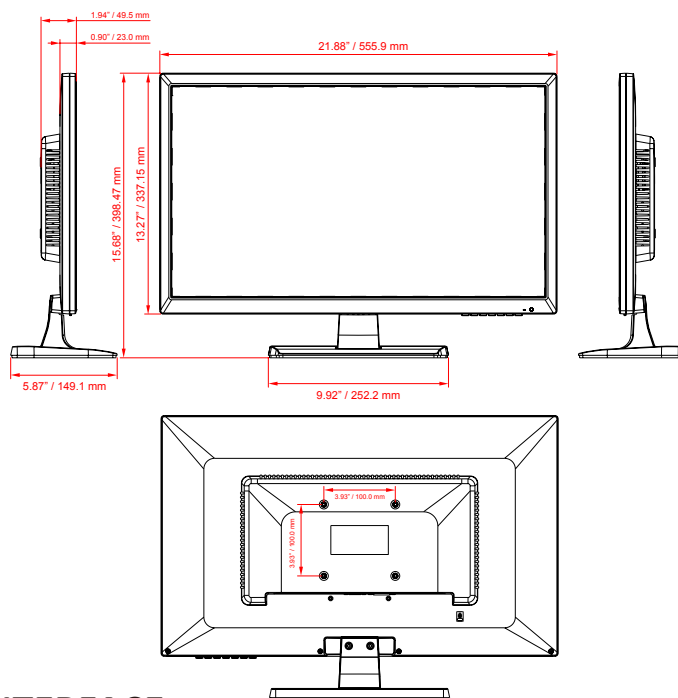

INTERFACE

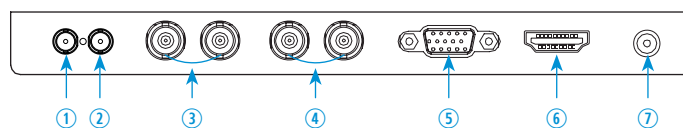

1. PC Audio IN
2. AV Audio IN
3. AV(AHD, TVI, CVI) IN / OUT
4. AV(CVBS) IN / OUT
5. VGA IN
6. HDMI IN
7. DC12V IN

Contact ViewZ

- Address : 177 W. Orangethorpe Ave., Placentia, CA 92870
- Phone : (714) 996-1177, Fax : (714) 996-1138
- Sales : sales@viewzusa.com
- Specification subject to change without notice.