


## DS-2CE56C2N-IT3

### 720 TVL Picadis EXIR Dome Camera



**EXIR**

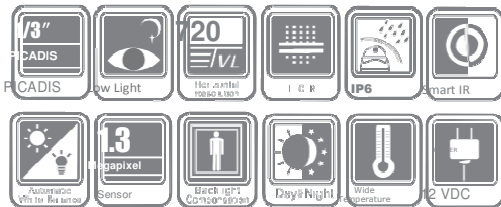


DS-2CE56C2N-IT3	
<b>Camera</b>	
Image Sensor	1/3" Picadis
Signal System	NTSC
Effective Pixels	1280 × 960
Minimum Illumination	Color: 0.34 @ f/2.2 B/W: 0 with IR
Shutter Speed	NTSC: 1/30 s to 1/30,000 s
Lens	3.6 mm (2.8 mm, 6 mm, 8 mm, 12 mm, 16 mm optional) Angle of view: 71.4° (3.6 mm)
Lens Mount	M12
Angle Adjustment	Pan: 0° to 360°, tilt: 0° to 75°, rotation: 0° to 360°
Day/Night	IR cut filter with auto switch
Horizontal Resolution	720 TVL
Synchronization	Internal synchronization
Video Output	1 Vp-p composite output (75 Ω/BNC)
S/N Ratio	More than 62 dB
BLC	On
<b>General</b>	
Working Temperature/ Humidity	-40° C to 60° C (-40° F to 140° F) Humidity 90% or less (non-condensing)
Power	12 VDC
Power Consumption	Maximum 5 W
Ingress Protection	IP66
IR Range	40 meters
Dimensions	Φ114.6 mm × 89.1 mm (Φ4.5" × 3.5")
Weight	300 g (0.66 lbs)

#### Key Features

- 1/3" Picadis
- 1.3 MP Sensor: 1280 x 960 Effective Pixels
- True Day/Night
- 720 TVL Horizontal Resolution
- 40 Meters IR Range
- Smart IR
- IP66 Weatherproof
- Wide Operating Temperature Range

#### Dimensions

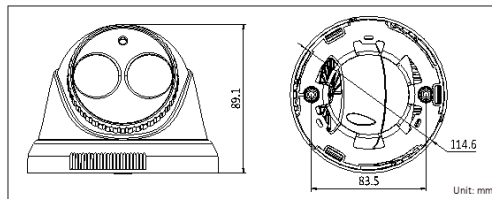

#### Accessories



WM110  
Wall Mount



WMS  
Wall Mount w/Junction Box

#### Order Models

DS-2CE56C2N-IT