

DS-2CD2212-I5


1.3 MP EXIR Bullet Network Camera



Key Features

- 1.3 Megapixel High Resolution
- HD Real-Time Video
- DWDR and 3D DNR
- EXIR Illuminators: up to 50 Meters
- IP66
- PoE
- Bracket Included

Dimensions

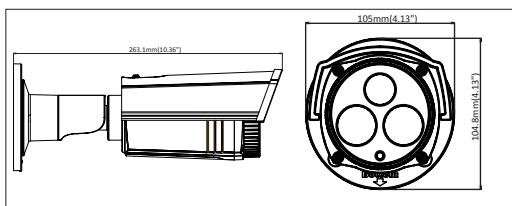

Accessories



PM
Vertical Pole Mount

CB130
Junction Box

Order Model

DS-2CD2212-I5

DS-2CD2212-I5	
Camera	
Image Sensor	1/3" progressive scan CMOS
Minimum Illumination	0.01 lux @ f/1.2, AGC on, 0 lux with IR
Shutter Speed	1/3 s to 1/100,000 s
Lens	4 mm @ f/2.0 (6 mm, 12 mm optional) Angle of view: 73.1° (4 mm), 46° (6 mm), 22° (12 mm)
Lens Mount	M12
Day/Night	IR cut filter with auto switch
Digital Noise Reduction	3D DNR
Wide Dynamic Range	Digital WDR
Compression Standard	
Video Compression	H.264/MJPEG
Bit Rate	32 Kbps to 12 Mbps
Dual Stream	Yes
Image	
Max. Image Resolution	1280 × 960
Frame Rate	30 fps (1280 × 960), (1280 × 720), (704 × 576), (640 × 480)
Image Settings	Rotate mode, saturation, brightness, contrast, sharpness adjustable through client software or Web browser
Backlight Compensation	Yes, zone optional
ROI	Supported
Network	
Network Storage	NAS (supports NFS, SMB/CIFS)
Alarm Triggers	Line crossing, intrusion detection, motion detection, tampering alarm, storage exception
Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IPv6, Bonjour
System Compatibility	OINVIF (PROFILE S, PROFILE G), PSIA, CGI, ISAPI
General Functionalities	Flickerless, heartbeat, mirror, privacy mask, watermark, IP address filtering, anonymous access
Interface	
Communication Interface	1 RJ-45 10 M/100 M Ethernet interface
General	
Operating Conditions	-30° C to 60° C (-22° F to 140° F), humidity 95% or less (non-condensing)
Power	12 VDC ±10%, PoE (802.3af)
Power Consumption	Maximum 7 W (maximum 9 W with IR cut filter on)
Weatherproof Rating	IP66
EXIR Range	Approximately 50 meters
Dimensions	105 mm × 104.8 mm × 263.1 mm (4.13" × 4.13" × 10.38")
Weight	950 g (2.09 lbs)