


Platinum Professional Level 8 Channel NVR 1U LTN8708Q1-P8



Key Features:

Rear Panel:

- H.265/H.265+/H.264/H.264 Zip+/MPEG4 video formats
 - Support live view, storage, and playback of the connected camera with up to the resolution of 8 Megapixels
 - Recording at up to 8MP resolution
 - Up to 1 SATA interfaces connectable for recording and backup
 - HDMI output at up to 4K(3840 x 2160) and VGA output at up to 1920 × 1080p resolution
- 1. Network Interfaces with PoE function
 - 2. Audio In
 - 3. Audio Out
 - 4. VGA Interface
 - 5. HDMI Interface
 - 6. LAN Network Interface
 - 7. USB Interface
 - 8. 48VDC power supply
 - 9. Power Switch
 - 10. GND

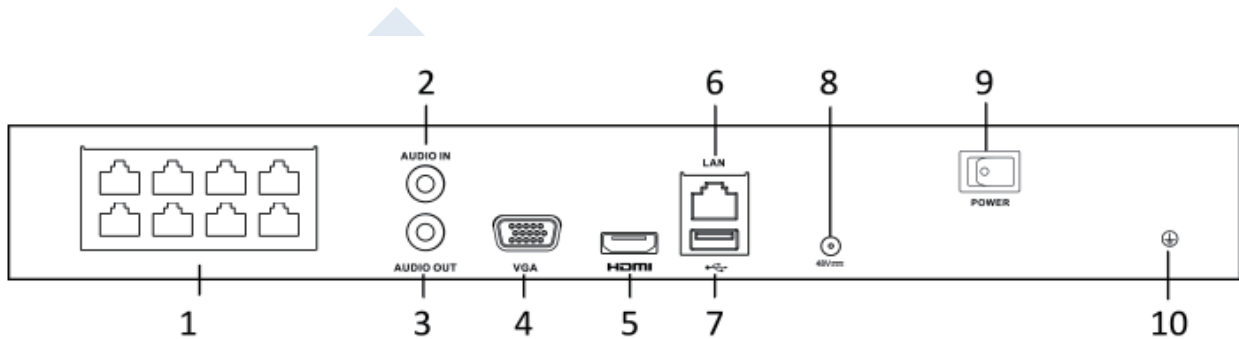

Platinum Professional Level 8 Channel NVR 1U

LTN8708Q1-P8

Video/Audio Input	
IP video Input	8-ch
Two-way audio input	1-ch, RCA (2.0 Vp-p, 1kΩ)
Network	
Incoming bandwidth	80 Mbps
Outgoing bandwidth	80Mbps
Video/Audio Output	
Recording resolution	8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA/4CIF/DCIF/ 2CIF/CIF/QCIF
HDMI output	4K (3840 × 2160)/30Hz, 1920 × 1080p/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz
VGA output	1920 × 1080p/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz
Audio output	1-ch, RCA (Linear, 1kΩ)
Decoding	
Decoding format	H.265/H.265+/H.264/H.264 Zip+/MPEG4
Recording resolution	8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA/4CIF/DCIF/ 2CIF/CIF/QCIF
Synchronous playback	8-ch
Capability	1-ch @ 8 MP / 4-ch @ 1080p
Hard Disk	
SATA	1 SATA interfaces for 1 HDDs
Capacity	Up to 6TB for each disk
External Interface	
Network Interface	1 RJ-45 10 /100 /1000 Mbps self-adaptive Ethernet interface
Network protocols	TCP/IP, DHCP, PT CLOUD, DNS, DDNS, NTP, IP Portal, SMTP, NFS, iSCSI, UPnP™, HTTPS
USB Interface	2 × USB 2.0
PoE	
Interface	8, RJ-45 10/100 Mbps self-adaptive Ethernet interfaces
Max. Power	≤ 75W
Supported standard	IEEE 802.3 af/at
GENERAL	
Power Supply	48V DC
Power	≤ 90W
Consumption	≤ 10W (without enabling PoE)
Working Temperature	14° F - 131° F (-10° C ~ +55° C)
Working Humidity	10% - 90%
Casing	1U chassis
Dimensions (WxDxH)	315 × 240 × 48mm (12.4 × 9.4 × 1.9 inch)
Weight	≤ 1 kg (2.2 lb)