

Mifare Card Reader


LTK1103M and LTK1103MK

Key Features:

- Built-in audible beeper;
- Display the reader status with LED indicator;
- Watchdog design for repairing itself in case that exception occurs, to ensure the long service life of the reader;
- Dust-proof and water-proof design



LTK1103M

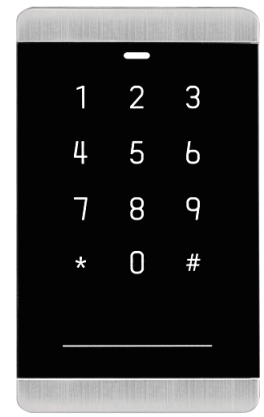

LTK1103MK

Properties

Power Supply	DC 12V
Working Current	≤500mA
Processor	32-bit
Reading Frequency	13.56MHz
Reading Range	30 to 50mm (1.18 to 1.96")
ID Settings	Setting by the DIP Switch on the Main Board
Audio Alert	Beeper
Power Consumption	≤6W
Keypad	No Keypad for LTK1103M; Keypad with 12 Keys (0 to 9, *, #) for LTK1103MK
Certifications	FCC, CE
LED Indicator	Power Indicator; Status LED Indicator
Working Temperature	-40°F to +158°F (-40°C to +70°C)
Working Humidity	10 % to 90 % (Non-Condensing)
Water-proof	IP64
Dimensions	5.08"x2.99"x0.58"(129mm×76mm×14.7mm)
Weight	≤ 0.33lb (0.15Kg)
Installing Method	Only applied for 120 Gang Box