DS-2CE56H5T-IT3ZE

5 MP Outdoor Ultra-Low Light VF PoC Turret Camera

- 5 MP High Performance CMOS
- Up to 2560 x 1944 Resolution
- Ultra-Low Light
- 2.8 mm to 12 mm Motorized Vari-Focal Lens
- OSD Menu, DNR, DWDR
- EXIR 2.0 with up to 130 ft (40 m) IR Range
- Up-the-Coax (HIKVISION-C)
- PoC.at
- IP67 Protection

The Hikvision DS-2CE56H5T-IT3ZE 5 MP Outdoor Ultra-Low Light VF Power-over-Coax (PoC) Turret Camera provides high definition analog output. TurboHD means that the analog signal can be sent over existing coaxial cable, eliminating the need to run new cables for high definition video.

EXIR is Hikvision's proprietary IR extended range technology, which has a range of 130 feet (40 meters).

The 2.8 mm to 12 mm lens is optimized for viewing angles that fit any situation. DWDR (Digital Wide Dynamic Range) ensures that ideal images are captured regardless of the lighting conditions.

Available models:
DS-2CE56H5T-IT3ZE

Specifications

	DS-2CE56H5T-IT3ZE
Camera	
Image Sensor	5 MP CMOS image sensor
Resolution	2560 (H) × 1944 (V)
Minimum Illumination	Color: 0.008 Lux @ (F1.2, AGC ON), 0 Lux with IR
Shutter Time	PAL: 1/25s to 1/50,000s; NTSC: 1/30s to 1/50,000s
Lens	2.8 mm to 12 mm motorized vari-focal lens
Horizontal Field of View	94° to 32°
Lens Mount	Φ14
Day & Night	IR cut filter
Angle Adjustment	Pan: 0° to 360°; tilt:0° to 75°; rotate: 0° to 360°
Synchronization	Internal synchronization
Frame Rate	2560 × 1944 @ 20 fps, 2560 × 1944 @ 12.5 fps; 2560× 1440 @ 30 fps, 2560× 1440 @ 25 fps (default); 1920×1080 @ 30 fps, 1920×1080 @ 25 fps **2560 × 1944 @ 12.5 fps is not available in PoC mode.*
Menu	
AGC	Supported
D/N Mode	Auto/Color/BW (Black and White)
White Balance	ATW/MWB
BLC	Supported
DWDR (Digital Wide Dynamic Range)	Supported
Language	English
Functions	Brightness, Sharpness, DNR , Mirror, Smart IR
Interface	
Video Output	1 HD analog output
General	
Operating Conditions	-40° F to 140° F (-40° C to 60° C), humidity: 90% or less (non-condensation)
Power Supply	12 VDC ± 25%/PoC.at
Power Consumption	Maximum 8 W
Ingress Protection	IP67
Material	Metal
IR Range	Up to 130 ft (40 m)
Communication	Up the coax, Protocol: HIKVISION-C (TVI output)
Dimensions	5.29" × 4.88" × 4.39" (134.3 mm × 123.9 mm × 111.4 mm)
Weight	Approximately 1.57 lbs (750 g)

Accessories



CBXS
Conduit Base



WML+ PC130T
Wall Mount Long and 130TRL Pendant Cap



PM
Pole Mount Adaptor

DS-1H18
Video Bailun

CM
Corner Mount Adapter



ABM
Angled Base

Dimensions

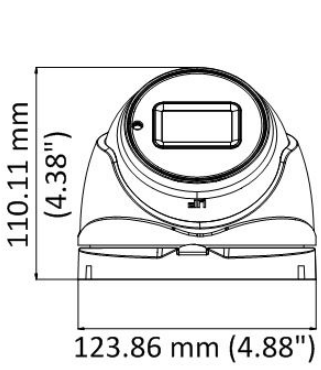

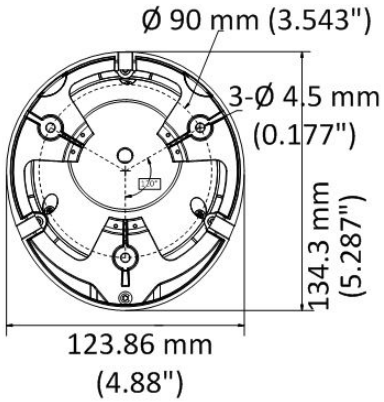

© 2017 Hikvision USA Inc. • All Rights Reserved • Specifications subject to change without notice.
Hikvision USA Inc., 18639 Railroad Street, City of Industry, CA 91748, USA • Hikvision Canada, 4848 rue Levy, St-Laurent, Quebec, Canada, H4R 2P1
Tel: +1-909-895-0400 • Toll Free in USA: +1-866-200-6690 • E-mail: sales.usa@hikvision.com • www.hikvision.com

Available from A1 Security Cameras
www.a1securitycameras.com email: sales@a1securitycameras.com