

4K Mini Fixed Bullet Network Camera

IPC2128SR3-DPF40(60)



Key Features

Optics

- Day/night functionality
- Smart IR , up to 30 m (98 ft) IR distance
- Optical glass window with higher light transmittance
- IR anti-reflection window to increase the infrared transmittance
- 2D/3D DNR (Digital Noise Reduction)
- Day/night functionality
- Up to 120 dB WDR (Wide Dynamic Range)

Compression

- Ultra 265,H.265, H.264, MJPEG
- Embedded smart algorithm
- Triple streams
- 9:16 corridor format

Network

- ONVIF Conformance

Structure

- Wide temperature range: -30°C to 60°C (-22°F to 140°F)


- Wide voltage range of $\pm 25\%$
- IP67

Specifications

	IPC2128SR3-DPF40				IPC2128SR3-DPF60	
Camera						
Sensor	1/2.5", 8.0 megapixel, progressive scan, CMOS					
Lens	4.0mm@ F1.6				6.0mm@ F1.6	
DORI Distance	Lens	Detect(m)	Observe(m)		Recognize(m)	Identify(m)
	4.0mm	72	28.8		14.4	7.2
	6.0mm	108	43.2		21.6	10.8
Angle of View(H)	91.6°			54.2°		
Angle of view(V)	47.2°			32.5°		
Angle of view(O)	112.7°			66.7°		
Adjustment Range	Pan: 0°~360°		Tilt: 0° ~ 90°		Rotation: 0° ~ 360°	
Shutter	Auto/Manual, 1/6~1/100000 s					
Minimum Illumination	Colour: 0.001 Lux (F1.6, AGC ON) 0 Lux with IR on					
Day/Night	IR-cut filter with auto switch (ICR)					
Digital noise reduction	2D/3D DNR					
S/N	>52dB					
IR Range	Up to 30m (98 ft) IR range					
Defog	Digital Defog					
WDR	120dB					
Video						
Video Compression	Ultra 265,H.265, H.264, MJPEG					
H.264 code profile	Baseline profile, Main Profile, High Profile					
Frame Rate	Main Stream:8MP (3840*2160): Max. 15 fps , Sub Stream:1080P (1920*1080): Max. 30 fps; Third Stream:D1(720*576) : Max. 30 fps					
9:16 Corridor Mode	Supported					
HLC	Supported					
BLC	Supported					
OSD	Up to 8 OSDs					
Privacy Mask	Up to 8 areas					
ROI	Up to 8 areas					
Motion Detection	Up to 4 areas					
Smart						
Behavior Detection	Intrusion, cross line, motion detection					
Intrusion	Enter and loiter in a pre-defined virtual region					
cross line	Cross a pre-defined virtual line					
motion detection	Moving within a pre-defined virtual region					

Recognition	Face detection
Intelligent Identification	Defocus, Scene Change
Statistical Analysis	People counting
General Function	Watermark, IP Address Filtering, Tampering Alarm, Access Policy, ARP Protection, RTSP Authentication, User Authentication
Network	
Protocols	IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, SSL
Compatible Integration	ONVIF(Profile S), API
Interface	
Network	1 RJ45 10M/100M Base-TX Ethernet
General	
Power	12 V DC \pm 25%, PoE (IEEE802.3 af)
	Power consumption: Max 6.4 W
Dimensions (L \times W \times H)	191.3 \times 72.6 \times 70.9mm (7.5" \times 2.9" \times 2.8")
Weight	0.45 kg (0.99 lb)
Working Environment	-30 $^{\circ}$ C \sim 60 $^{\circ}$ C (-22 $^{\circ}$ F \sim 140 $^{\circ}$ F), Humidity : 10%~90% RH(non-condensing)
Ingress Protection	IP67

Dimensions

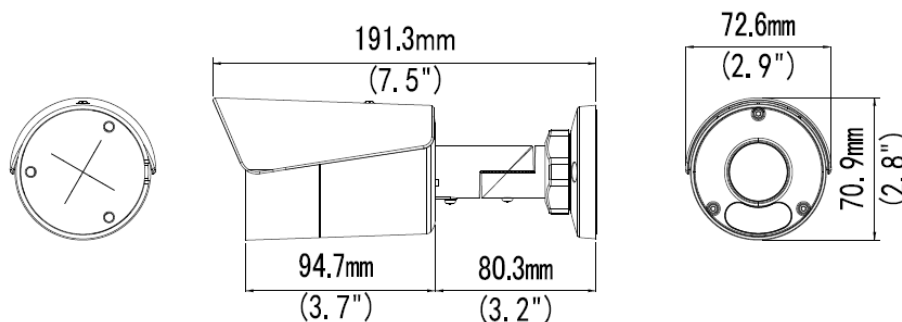

Accessories

Installation mode	Accessories	Description
Wall mount	\	Mounting pedestal is included in the Product package
Ceiling mount	\	Mounting pedestal is included in the Product package

Zhejiang Uniview Technologies Co., Ltd.

Building No.10, Wanlun Science Park, Jiangling Road 88, Binjiang District, Hangzhou, Zhejiang, China (310051)

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2018 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.