

CMIP7122


2MP In-Ceiling Network Camera



Key features

- 2.0 megapixel high resolution
- Full HD 1080P real-time video output
- Video Content Analytics(VCA)
- Region of Interest(ROI)
- 3D DNR & DWDR & BLC
- Built-in Micro SD/SDHC/SDXC card slot, up to 64 GB

Dimensions

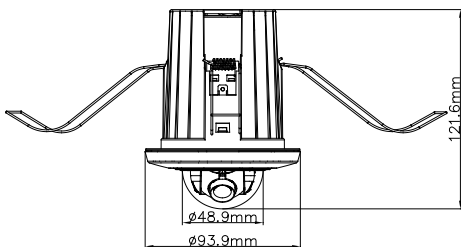

CMIP7122	
Camera	
Image sensor	1/3" sensor
Min. illumination	0.01 lux @F1.2, AGC ON, 0 lux with IR
Shutter time	1/3s ~ 1/100,000s
Lens	4mm Angle of view: 79°
Lens mount	M12
Day & night	Auto switch
Digital noise reduction	3D DNR
Wide Dynamic Range	Digital WDR
Angle Adjustment	Pan:0° - 355° , Tilt: 0° - 80°
Compression Standard	
Video compression	H.264 / MJPEG
H.264 Type	BaseLine Profile/Main Profile
Bit rate	32 Kbps ~ 8Mbps
Dual Stream	Yes
Image	
Max. Image Resolution	1920 × 1080
Frame rate	60Hz: 30fps (1920 × 1080), 30fps (1280 × 960), 30fps (1280 × 720) 50Hz: 25fps (1920 × 1080), 25fps (1280 × 960), 25fps (1280 × 720)
Image settings	Rotate mode, Saturation, Brightness, Contrast adjustable by client software or web browser
BLC	Yes,zone optional
ROI	Support
Network	
Network storage	Local storage: Built-in Micro SD/SDHC/SDXC card slot, up to 64 GB. NAS (Support NFS,SMB/CIFS)
Alarm trigger	Line Crossing, Intrusion Detection, Motion detection, Dynamic analysis, Tampering alarm, Network disconnect, IP address conflict, Storage exception
Protocols	TCP/IP,ICMP,HTTP,HTTPS,FTP,DHCP,DNS,DDNS,RTSP,RTCP, PPPoE,NTP,UPnP,SMTP,SNMP,IGMP,802.1X,QoS,IPv6,Bonjour
General	One-key reset, Flash-prevention, dual stream, heartbeat, mirror, password protection, privacy mask, watermark, IP address filtering, Anonymous access
Standard	ONVIF, PSIA, CGI, ISAPI
Interface	
Communication interface	1 RJ45 10M/100M Ethernet interface
General	
Operating conditions	14° F ~ 104° F(-10° C ~ 40° C) humidity 95% or less (non-con densing)
Power supply	12 VDC ± 10%, PoE (802.3af)
Power consumption	Max. 4.5W
Dimension	Φ3.7" × 4.8" (Φ93.9×121.6mm)
Weight	0.4lbs(200g)