


8" 70/25V Ceiling Tile Speaker

SPCT8T

White housing

Features

- Easy select transformer dial
- 25V or 70V selector switch
- Fits directly into a 2'x2' ceiling tile grid
- Smooth vent facade design
- Includes 2' rail for mounting in a 2' x 4' ceiling grid
- Lifetime warranty

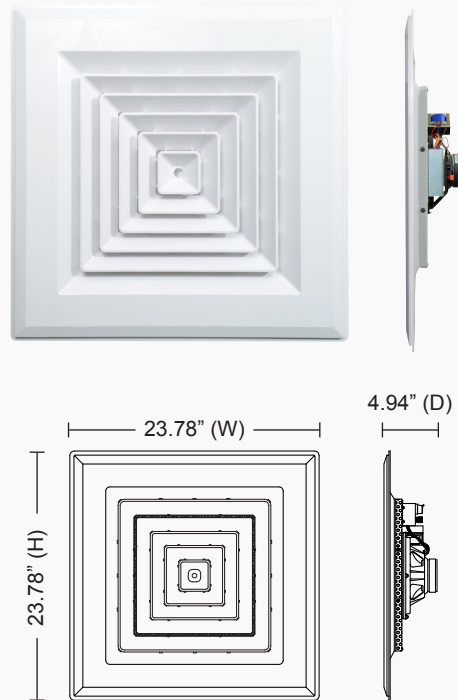

Specifications

RMS Power	30W
Max. Power.....	60W
Transformer Type	70/25V (selectable)
Transformer Power Type	20W, 10W, 5W, 2.5W, 1.25W & 8 Ohms
Termination Type	Press terminal
Sensitivity (1W/1M).....	89dB
Maximum SPL (Pax/1M).....	97.1dB
Driver Impedance	8 Ohms
Magnet.....	10 oz. ferrite
Frequency Response Range	50Hz ~ 20kHz
Dispersion @ 1000Hz	160° Conical
Driver.....	8" polypropylene woofer, 0.75" Mylar tweeter
Speaker Dimensions.....	23.78" (W) x 23.78" (H) x 4.94" (D)
Mounting Dimensions	n/a
Minimum Mounting Depth.....	6.5" (Dia.)
Weight	7.26 lbs.
Material.....	Baffle: High impact polystyrene
Color.....	White

Speco Technologies is constantly developing and improving products.
We reserve the right to modify product design and specifications without notice
and without incurring any obligation. Spec Rev. 11/11/14