

MODEL # VZ-46NL

| VIDEO | |
|---------------------|-------------------------|
| Screen Size | 46" |
| Max. Resolution | 1920 x 1080 @60Hz |
| Pixel Pitch | 0.53025 mm x 0.53025 mm |
| Brightness | 700cd/m²(Typical) |
| Contrast Ratio | 3000:1 |
| Aspect Ratio | 16 : 9 |
| Viewing Angle (H/V) | 178° / 178° |
| Display Color | 16.7 Million |
| Response Time | < 8ms |
| Video System | NTSC / PAL |
| Frequency (H) | 31 ~ 80Khz |
| Frequency (V) | 56 ~ 75Hz |

| INTERFACE | |
|---------------------------------------|-------|
| AV(Composite) In/ Out | 2 / 2 |
| S-Video In / Out | 1 / 1 |
| VGA In(15Pin D-Sub) | 1 |
| Component(Y, Pb, Pr, Sound L/R) In | 1 |
| DVI In | 1 |
| HDMI In | 2 |
| RS-232C In/Out | 1 / 1 |
| AV(Composite) Sound In/Out (RCA Type) | 2 / 2 |
| PC Stereo In/Out | 1 / 1 |

| AUDIO | |
|------------------|--------|
| Built in speaker | 7W X 2 |

| SPECIAL FEATURES | |
|------------------------|--|
| Bezel Width | 0.49" / 12.5mm |
| Multi Display Function | PIP / PBP / VOV |
| Filter Type | 3D Comb-filter / De-interlace |
| Image Retention | YES |
| Rotate IR receiver | YES |
| Multi-lingual Language | English, Spanish, French, German, Italian, Portuguese, Dutch |

| DIMENSIONS & WEIGHT | |
|-------------------------------|------------------------------------|
| Outline Dimension (W x H x D) | 41.34" x 23.74" x 5" |
| | 1050.03 mm x 602.99 mm x 127mm |
| Net Weight / Gross Weight | 73 lbs (33 kg) / 95 lbs (43kg) |


| MOUNT | |
|-------|--|
| VESA | 600mm x 100mm x 100mm x 100mm, M8 x L12 Screws |

| GENERAL | |
|---------------------------------|---------------------------|
| Transmitter - IR Remote Control | YES |
| Power Electrical Ratings | AC100 ~ 240V(50/60Hz) |
| Consumption | 240 W |
| Warranty Parts/ Labor | 3 Year / 3 Year |
| MTBF (Approx.) | 50,000 Hours |
| Operating Temperature | 32 - 104°F / 0 - 40°C |
| Compatible Mounts WALL | VZ-XM46, VZ-AM03, VZ-WM71 |
| CEILING | VZ-CMKIT-04 |


VZ-46NL ADVANTAGES

- 46" 1080p CCTV LED Monitor
- Narrow 12.5mm Metal Bezel
- Video Wall Construction - Active to Active Bezel Width 25 mm
- OSD Function Control through RS-232C protocol
- Digital & Analog Inputs, 3-Year Warranty
- Image Rotation Feature Prevents "Pixel Burn-In"

DIMENSIONS

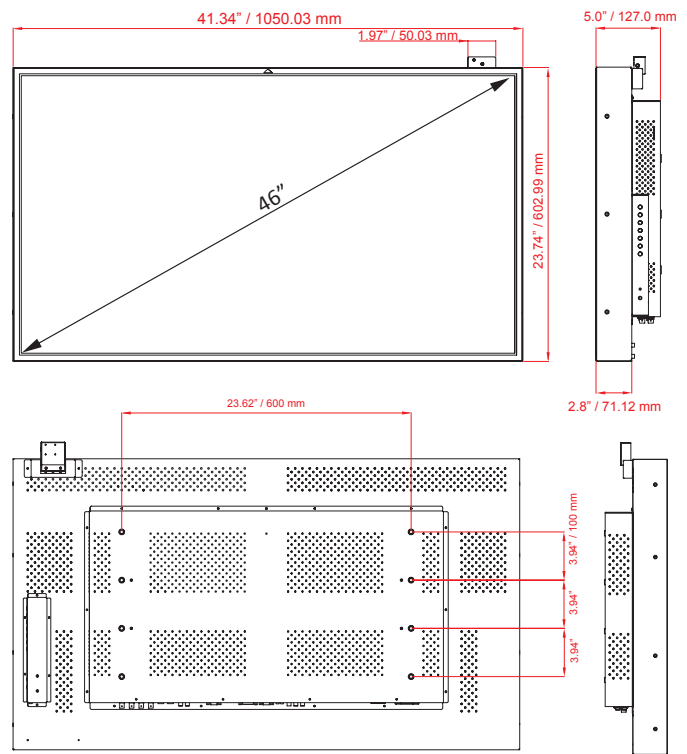

INTERFACE

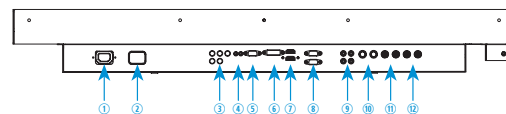

- | | | |
|---------------------------|-------------------------------------|---------------------------|
| 1. AC110V IN | 6. DVI IN | 10. S-VIDEO IN/OUT |
| 2. AC110V OUT | 7. HDMI1 / HDMI2 IN | 11. AV(composite)1 IN/OUT |
| 3. COMPONENT IN | 8. RS-232C IN/OUT | 12. AV(composite)2 IN/OUT |
| 4. AUDIO OUT/PC STEREO IN | 9. AV(composite) SOUND IN/OUT (RCA) | |
| 5. VGA IN | | |

Contact ViewZ

- Address : 177 W. Orangethorpe Ave., Placentia, CA 92870
- Phone : (714) 996-1177, Fax : (714) 996-1138
- Sales : sales@viewzusa.com
- Specification subject to change without notice.