


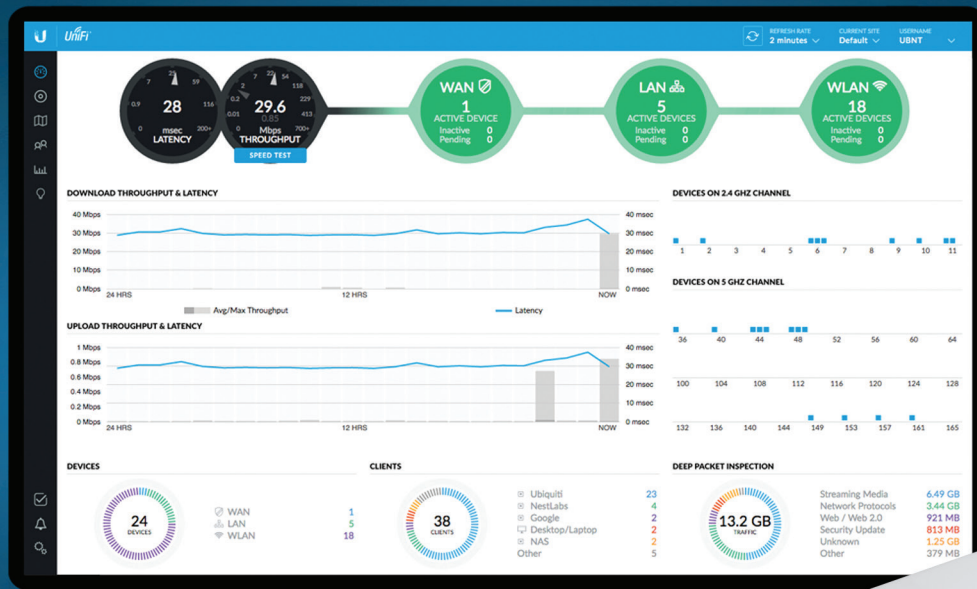

UniFi[®] | SECURITY GATEWAY

Enterprise Gateway Router
with Gigabit Ethernet

Models: USG, USG-PRO-4

Advanced Security, Monitoring, and Management

Sophisticated Routing Features

Integrated with UniFi[®] Controller Software



Affordable Enterprise Network Security

Ubiquiti Networks introduces the UniFi® Security Gateway, which extends the UniFi Enterprise System to encompass routing and security for your network.

The UniFi Security Gateway combines reliable security features with high-performance routing technology in a cost-effective unit.

Two models are available:

- **USG-PRO-4** Rack-mountable form factor with fiber connectivity options and a dual-core, 1 GHz processor for maximum hardware-accelerated performance.
- **USG** Wall-mountable form factor with a dual-core, 500 MHz processor for standard hardware-accelerated performance.

Powerful Firewall Performance

The UniFi Security Gateway offers advanced firewall policies to protect your network and its data.

Convenient VLAN Support

The UniFi Security Gateway can create virtual network segments for security and network traffic management.


VPN Server for Secure Communications

A site-to-site VPN secures and encrypts private data communications traveling over the Internet.


QoS for Enterprise VoIP and Video

Top QoS priority is assigned to voice and video traffic for clear calls and lag-free, video streaming.


The UniFi Security Gateway is deployed in the same manner as UniFi Access Points for wireless networking. Use the intuitive UniFi Controller to conduct device detection, provisioning, and management.

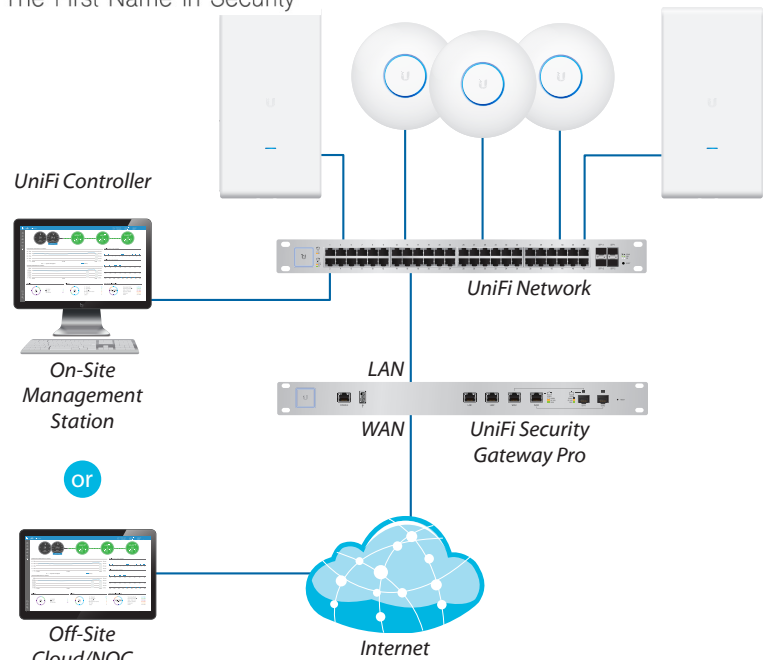

Example of a UniFi Enterprise System

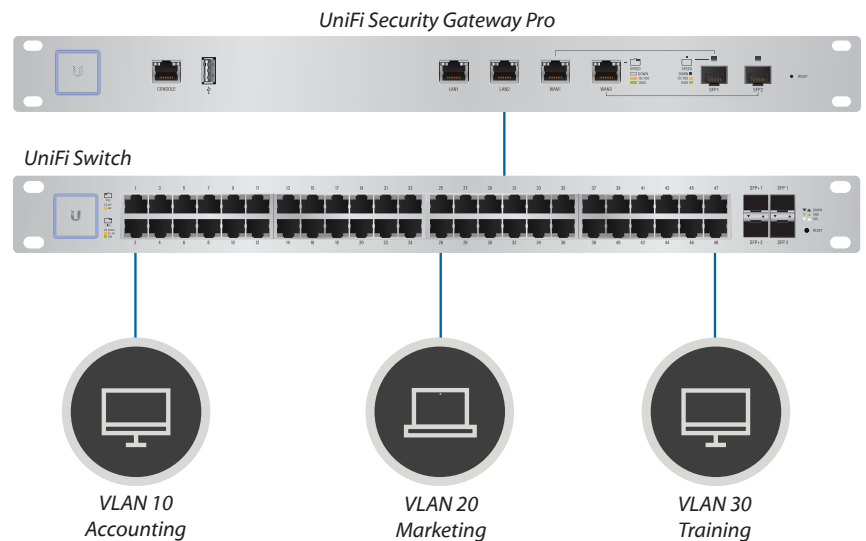

Network Segmentation with VLAN

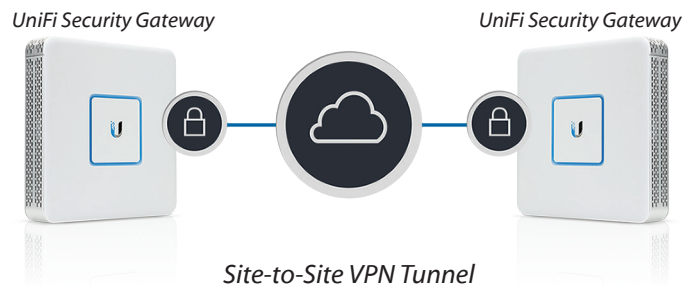

Site-to-Site VPN Tunnel

UniFi Controller

Introducing the new UniFi Controller software featuring a refreshed UI and support for the next generation of UniFi devices.

Improved User Experience

Redesigned to be more intuitive and easier to navigate, the new UI raises the bar for enterprise network management efficiency. Important network details are logically organized for a simplified, yet powerful, interface.

Packed with Features

Use the UniFi Controller to provision thousands of UniFi APs and UniFi Security Gateways, map out networks, quickly manage system traffic, and provision additional UniFi devices.

Network Overview

A comprehensive overview of your Network Health is readily available in the new dashboard. Monitor your network's vitals and make on-the-fly adjustments as needed.

Detailed Analytics


Use the configurable reporting and analytics to monitor large user groups and expedite troubleshooting. Advanced search and sorting capabilities make network management more efficient.

Multi-Site Management

A single UniFi Controller running in the cloud can manage multiple sites: multiple, distributed deployments and multi-tenancy for managed service providers. Each site is logically separated and has its own configuration, maps, statistics, guest portal, and administrator read/write and read-only accounts.


LAN/WLAN Groups

The UniFi Controller can manage flexible configurations of large deployments. Create multiple LAN and WLAN groups and assign them to the respective UniFi devices.

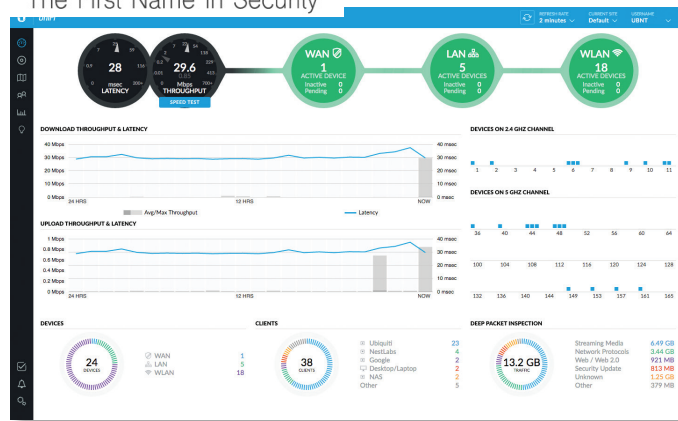

Dashboard

UniFi provides a visual representation of your network's status and delivers basic information about each network segment.

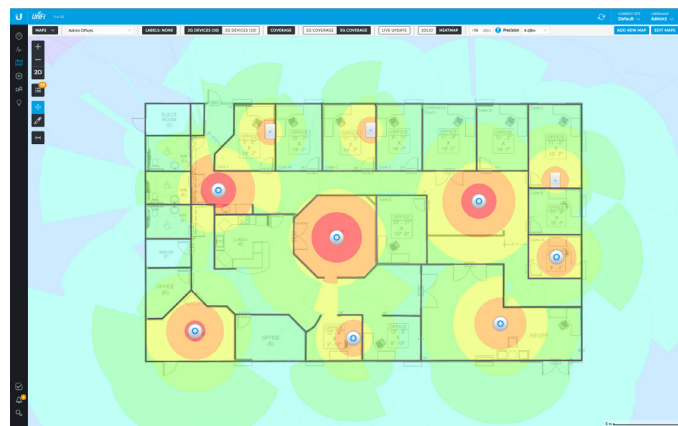

Maps

Upload a map of your location(s) or use Google Maps to represent the areas where your UniFi devices are located. Starting with v5.6.x, you can also use the predictive map feature to get a preview of coverage, so you can help avoid dead spots.

Device Name	IP Address	Status	Model	Version	Uptime	Actions
Rack USG-Pro-4	192.168.1.1	CONNECTED	UniFi Security Gateway 4P	4.3.11.4832827	34 55h 45s	LOCATE RESTART
AP-1 US-16-150W	192.168.1.233	CONNECTED	UniFi Switch 16 POC-150W	3.5.1.4098	35h 28m 45s 7s	LOCATE RESTART
Downstairs US-48-500W	192.168.1.231	CONNECTED	UniFi Switch 48 POC-500W	3.5.1.4098	4h 22m 55m 15s	LOCATE RESTART
Workshop US-48-750W	192.168.1.240	CONNECTED	UniFi Switch 48 POC-750W	3.5.1.4098	3h 22m 12m 15s	LOCATE RESTART
Rack US-48-750W	192.168.1.9	CONNECTED	UniFi Switch 48 POC-750W	3.5.1.4098	4h 22m 55m 29s	LOCATE RESTART
PodRoom US-8-150W	192.168.1.304	CONNECTED	UniFi Switch 8 POC-150W	3.5.1.4098	5h 0m 12m 17s	LOCATE RESTART
AC-Bathroom	192.168.1.251	CONNECTED			4h 22m 55m 4s	LOCATE RESTART
AC-LITE	192.168.1.162	CONNECTED			4h 22m 57m 32s	LOCATE RESTART
AC-LR-Bathroom	192.168.1.137	CONNECTED			4h 22m 56m 4s	LOCATE RESTART
44-01-07-02-04-33	192.168.1.197	CONNECTED			3h 22m 11m 32s	LOCATE RESTART
44-01-07-02-04-41	192.168.1.198	CONNECTED			3h 19m 26m 31s	LOCATE RESTART
AC-Pro-Bathroom	192.168.1.7	CONNECTED			4h 22m 55m 31s	LOCATE RESTART
44-01-07-02-04-09	192.168.1.200	CONNECTED			4h 22m 55m 44s	LOCATE RESTART
Protagonist UAP-AC-Pro	192.168.1.182	CONNECTED			5h 0m 12m 15s	LOCATE RESTART
AC-Pro-Corridor	192.168.1.124	CONNECTED			3h 22m 11m 34s	LOCATE RESTART
Timeout	192.168.1.225	CONNECTED			5h 0m 12m 15s	LOCATE RESTART
Living	192.168.1.126	CONNECTED			5h 0m 12m 15s	LOCATE RESTART
Sitting	192.168.1.124	CONNECTED			5h 0m 12m 15s	LOCATE RESTART
Master	192.168.1.128	CONNECTED			5h 0m 12m 15s	LOCATE RESTART
Lab	192.168.1.139	CONNECTED			5h 0m 12m 15s	LOCATE RESTART
Basement	192.168.1.140	CONNECTED			5h 0m 12m 15s	LOCATE RESTART
34-01-07-04-21-21	192.168.1.122	CONNECTED			3h 17m 22m 15s	LOCATE RESTART
Pro-restaurant	192.168.1.104	CONNECTED			5h 0m 12m 15s	LOCATE RESTART
Pro-restaurant	192.168.1.141	CONNECTED			3h 22m 11m 49s	LOCATE RESTART

Device Configuration

The **Devices** screen displays a list of UniFi devices discovered by the UniFi Controller. You can access each managed device for device details and configuration.

Model: USG-PRO-4

The USG-PRO-4 offers optional SFP ports for fiber connectivity to support backhaul applications.

- (2) 10/100/1000 RJ45 LAN Ports
- (2) 1 Gbps RJ45/SFP Combination WAN Ports*
- (1) RJ45 Serial Console Port
- Rack-Mounting Capability
- Layer 3 Forwarding Performance
- Packet Size of 64 Bytes: 2,400,000 pps
- Packet Size of 512 Bytes or Larger: 4 Gbps (Line Rate)

* The USG-PRO-4 WAN port, as a result of being a combination SFP/GigE port, is a pure 1 Gbps port – it is incapable of both 10 Mbps and 100 Mbps FDX/HDX settings.



Front Panel



Back Panel

UniFi® SECURITY GATEWAY

Model: USG

The USG features a compact form factor and fanless operation for discreet integration.

- (3) 10/100/1000 RJ45 Ports*
- (1) RJ45 Serial Console Port
- Quiet, Fanless Operation
- Wall-Mounting Capability
- Layer 3 Forwarding Performance
- Packet Size of 64 Bytes: 1,000,000 pps
- Packet Size of 512 Bytes or Larger: 3 Gbps (Line Rate)

* VOIP port is available for port remapping in UniFi v5.



Top Panel



Front Panel

Specifications

UniFi USG-PRO-4	
Dimensions	484 x 44 x 164 mm (19.06 x 1.73 x 6.46")
Weight	2.3 kg (5.07 lb)
Max. Power Consumption	40W
Power Supply	Internal AC/DC Power Adapter, 60W (24V, 2.5A)
Power Input	110 - 240VAC
LEDs	Status
System	Speed/Link/Activity
Data Ports	
Networking Interfaces	
Serial Console Port	(1) RJ45 Serial Port
Data Ports	(2) 10/100/1000 RJ45 LAN Ports (2) 1 Gbps RJ45/SFP Combination WAN Ports
Layer 3 Forwarding Performance	
Packet Size: 64 Bytes	2,400,000 pps
Packet Size: 512 Bytes or Larger	4 Gbps (Line Rate)
Processor	Dual-Core 1 GHz, MIPS64 with Hardware Acceleration for Packet Processing
System Memory	2 GB DDR3 RAM
On-Board Flash Storage	4 GB
Certifications	CE, FCC, IC
Rackmount	Yes
Operating Temperature	-10 to 45° C (14 to 113° F)
Operating Humidity	10 to 90% Noncondensing



Specifications

UniFi USG	
Dimensions	135 x 135 x 28.3 mm (5.32 x 5.32 x 1.11")
Weight	366 g (12.9 oz)
Max. Power Consumption	7W
Power Supply	12VDC, 1A Power Adapter (Included)
Power Input	9 to 24VDC, Supported Voltage Range
LEDs	Status
System	Power
Serial Console Port	Speed/Link/Activity
Data Ports	
Networking Interfaces	(1) RJ45 Serial Port
Serial Console Port	(3) 10/100/1000 Ethernet Ports*
Data Ports	
Layer 3 Forwarding Performance	
Packet Size: 64 Bytes	1,000,000 pps
Packet Size: 512 Bytes or Larger	3 Gbps (Line Rate)
Processor	Dual-Core 500 MHz, MIPS64 with Hardware Acceleration for Packet Processing
System Memory	512 MB DDR2 RAM
On-Board Flash Storage	2 GB
Certifications	CE, FCC, IC
Wall-Mountable	Yes
Operating Temperature	-10 to 45° C (14 to 113° F)
Operating Humidity	10 to 90% Noncondensing

* VOIP port is available for port remapping in UniFi v5.



Specifications are subject to change. Ubiquiti products are sold with a limited warranty described at: www.ubnt.com/support/warranty
 ©2014-2017 Ubiquiti Networks, Inc. All rights reserved. Ubiquiti, Ubiquiti Networks, the Ubiquiti U logo, the Ubiquiti beam logo, and UniFi are trademarks or registered trademarks of Ubiquiti Networks, Inc. in the United States and in other countries. All other trademarks are the property of their respective owners.