



BOSCH
Invented for life

Auto-iris Motorized Zoom Lenses



- ▶ **High Quality Optics**
- ▶ **Reliable, Robust Construction**
- ▶ **1/3-inch Format with DC-iris Control**
- ▶ **1/2-inch Format with Video-iris Control**
- ▶ **6x, 10x, 15x, and 20x Zoom Ranges**
- ▶ **Optional Pre-positioning**
- ▶ **15x with Manual Override**

These Motorized Zoom Lenses are compact, rugged, 1/3-inch and 1/2-inch image format auto iris lenses. Their high sensitivity and reliability provide optimal performance in all environments.

The 1/3-inch DC-iris Series Lenses have been designed for more economical uses and are provided with a standard CS mount for use with a wide variety of cameras.

The 1/2-inch Video-iris Series are high quality lenses, and are provided with both CS and C mount options.

Functions


For the auto iris control, all lenses use the standard 4-pin EIAJ connector which fits directly into the camera's iris output. For zoom, focus, and pre-position control, the lenses are fitted with an 8-pin DIN connector.

Impressive optical quality is a result of combined high standards for resolution, contrast reproduction, and lens coating. The lenses have been designed to match with the complete range of Bosch cameras. When used in combination with the 1/2-inch Series cameras they provide the necessary large F/stop and high quality camera optic features.


Lenses in this series include 6x, 10x, 15x, and 20x zoom range models. Some models provide optional pre-position and manual iris override functions.

The mechanical construction has been designed to withstand the frequent control operations of the iris, zoom, and focus operations. For a cost effective lens that provides the high quality and reliability needed to enhance camera images, these lenses are the ideal solution.


Installation/Configuration Notes

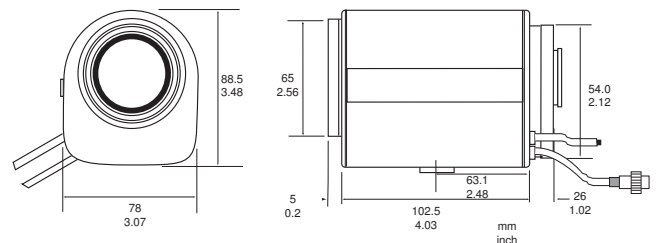


Dimensions LTC 3293 / 20 & LTC 3293 / 30

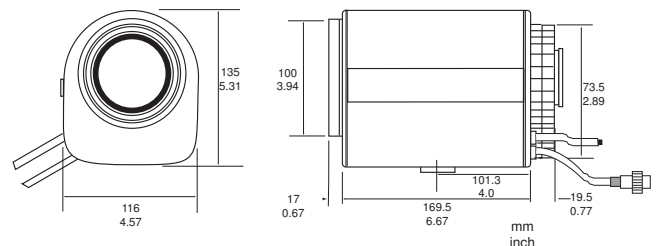


Dimensions LTC 3293 / 40 & LTC 3293 / 50

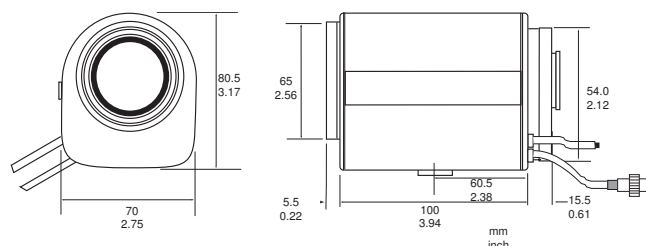


Dimensions LTC 3283/50

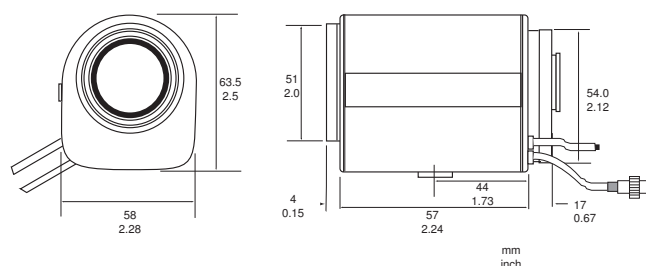

Dimensions LTC 3283/20

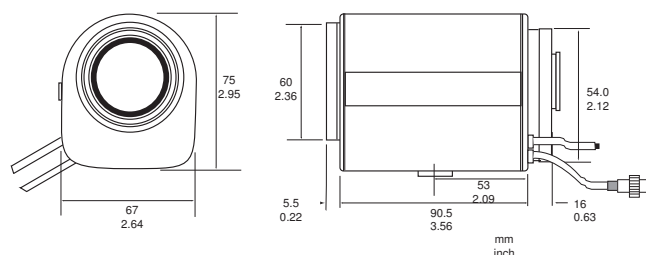

Dimensions LTC 3283/40

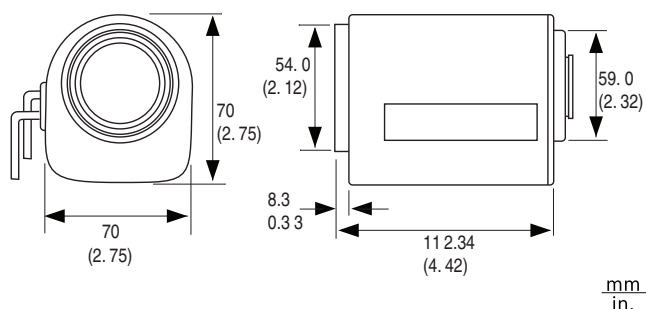

Dimensions LTC 3384/21

Ordering Information

LTC 3384/21 Zoom Lens **LTC3384/21**
1/3-inch, 6 – 60 mm, DC-iris, CS-mount
F1.4-360, 4-pin

LTC 3293/20 Zoom Lens **LTC3293/20**
1/2-inch, 8 – 120 mm, Video-iris, C-mount
F1.6-1000, 4-pin

LTC 3293/30 Zoom Lens **LTC3293/30**
1/2-inch, 8 – 120 mm, Video-iris, C-mount
F1.6-1000, 4-pin, pre-position and manual override

LTC 3293/40 Zoom Lens **LTC3293/40**
1/2-inch, 12 – 240 mm, Video-iris, C-mount
F1.6-720, 4-pin

LTC 3293/50 Zoom Lens **LTC3293/50**
1/2-inch, 12 – 240 mm, Video-iris, C-mount
F1.6-720, 4-pin, pre-position

LTC 3283/20 Zoom Lens **LTC3283/20**
1/2-inch, 8.0 – 48 mm, Video-iris, CS-mount
F1.4-360, 4-pin

LTC 3283/40 Zoom Lens **LTC3283/40**
1/2-inch, 7.5 – 75 mm, Video-iris, CS-mount
F1.4-360, 4-pin

LTC 3283/50 Zoom Lens **LTC3283/50**
1/2-inch, 7.5 – 75 mm, Video-iris, C-mount
F1.2-512, 4-pin, pre-position

Accessories

S1374 Adapter **S1374**
converts C mount lens to CS mount camera

Auto-iris Motorized Zoom Lenses



	LTC3384/21	LTC3293/20	LTC3293/30	LTC3293/40
Image format	1/3-inch	1/2-inch	1/2-inch	1/2-inch
Zoom	10x	15x	15x	20x
Focal length	6 - 60 mm	8 - 120 mm	8 - 120 mm	12 - 240 mm
Iris range	F1.4-360	F1.6-1000	F1.6-1000	F1.6-720
Min. object distance	1.3 m	1.5 m	1.5 m	2.8 m
Pre-position	N/A	N/A	Yes	N/A
Manual override	N/A	N/A	Yes	N/A
Lens mount	CS	C	C	C
Dimensions	See drawing	see drawing	see drawing	see drawing
Weight	380 g (0.84 lb)	800 g (1.76 lb)	800 g (1.76 lb)	2630 g (5.79 lb)
Temp. range	-5°C to +50°C +23°F to 122°F	-10°C to +50°C (+14°F to 22°F)	-10°C to +50°C +14°F to 122°F	-10°C to +50°C +14°F to 122°F

Iris characteristics

Iris control	4-pin video iris	4-pin video iris	4-pin video iris	4-pin video iris
Operating voltage	8 - 12 VDC	8 - 12 VDC	8 - 12 VDC	8 - 12 VDC
Response speed	Approx.2 s	Approx.1.5 s	Approx.1.5 s	Approx.1.5 s
Operating current	70 mA (max.)	50 mA (max.)	50 mA (max.)	50 mA (max.)
Input signal	VS or V	VS or V	VS or V	VS or V
Impedance	10 kOhm	10 kOhm	10 kOhm	10 kOhm
Iris accuracy	Approx.8 s	+20% (signal level)	+20% (signal level)	+20% (signal level)
Sensitivity	0.5-1.0 Vp-p	0.5-1.0 Vp-p	0.5-1.0 Vp-p	0.5-1.0 Vp-p

Zoom characteristics

Zoom control	Motor drive	Motor drive	Motor drive	Motor drive
Motorized spd.(app.)	8 s	6 sec	6 sec	10 sec
Operating voltage	12 VDC	12 VDC	12 VDC	12 VDC
Operating current	70 mA (max.)	55 mA (max.)	55 mA (max.)	55 mA (max.)

Focus characteristics

Focus control	Motor drive	Motor drive	Motor drive	Motor drive
Motorized spd.(app.)	5.5 s	8 sec	8 sec	10 sec
Operating voltage	12 VDC	12 VDC	12 VDC	12 VDC
Operating current	55 mA (max.)	55 mA (max.)	55 mA (max.)	55 mA (max.)

Auto-iris Motorized Zoom Lenses



LTC3384/21



LTC3293/20



LTC3293/30



LTC3293/40

Angle of view 1/3-inch camera (Wide – Tele)

Horizontal	43.4°-4.5°	32°56'-2°20'	32°56'-2°20'	23°01'-1°10'
Vertical	32.7°-3.5°	24°49'-1°45'	24°49'-1°45'	17°13'-0°52'

Angle of view 1/2 -inch camera (Wide – Tele)

Horizontal	–	43°29'-3°05'	43°29'-3°05'	30°52'-1°33'
Vertical	–	32°56'-2°20'	32°56'-2°20'	23°01'-1°10'

Auto-iris Motorized Zoom Lenses



	LTC3293/50	LTC3283/20	LTC3283/40	LTC3283/50
Image format	1/2-inch	1/2-inch	1/2-inch	1/2-inch
Zoom	20x	6x	10x	10x
Focal length	12 - 240 mm	8 - 48 mm	7.5 - 75 mm	7.5 - 75 mm
Iris range	F1.6-720	F1.4-360	F1.4-360	F1.2-512
Min. object distance	2.8 m	1.8 m	1.8 m	1.8 m
Pre-position	Yes	N/A	N/A	Yes
Manual override	N/A	N/A	N/A	N/A
Lens mount	C	CS	CS	C
Dimensions	see drawing	see drawing	see drawing	see drawing
Weight	2630 g (5.79 lb)	400 g (0.88 lb)	580 g (1.28 lb)	740 g (1.63 lb)
Temp. range	-10°C to +50°C +14°F to 122°F	-10°C to +50°C +14°F to 122°F	-10°C to +50°C +14°F to 122°F	-10°C to +50°C +14°F to 122°F

Iris characteristics

Iris control	4-pin video iris	4-pin video iris	4-pin video iris	4-pin video iris
Operating voltage	8 - 12 VDC	8 - 12 VDC	8 - 12 VDC	8 - 12 VDC
Response speed	Approx.1.5 s	Approx.1.5 s	Approx.1.5 s	Approx.1.5 s
Operating current	50 mA (max.)	50 mA (max.)	50 mA (max.)	50 mA (max.)
Input signal	VS or V	VS or V	VS or V	VS or V
Impedance	10 kOhm	10 kOhm	10 kOhm	10 kOhm
Iris accuracy	+20% (signal level)	+20% (signal level)	+20% (signal level)	+20% (signal level)
Sensitivity	0.5-1.0 Vp-p	0.5-1.0 Vp-p	0.5-1.0 Vp-p	0.5-1.0 Vp-p

Zoom characteristics

Zoom control	Motor drive	Motor drive	Motor drive	Motor drive
Motorized spd.(app.)	10 sec	5 s	5.5 s	5.5 s
Operating voltage	10 sec	12 VDC	12 VDC	12 VDC
Operating current	55 mA (max.)	55 mA (max.)	55 mA (max.)	55 mA (max.)

Focus characteristics

Focus control	Motor drive	Motor drive	Motor drive	Motor drive
Motorized spd.(app.)	10 sec	5 s	6.5 s	5.5 s
Operating voltage	12 VDC	12 VDC	12 VDC	12 VDC
Operating current	55 mA (max.)	55 mA (max.)	55 mA (max.)	55 mA (max.)

Auto-iris Motorized Zoom Lenses



LTC3293/50



LTC3283/20



LTC3283/40



LTC3283/50

Angle of view 1/3-inch camera (Wide – Tele)

Horizontal	23°01' - 1°10'	32°42' - 5°05'	34°38' - 3°46'	34°57' - 3°46'
Vertical	17°13' - 0°52'	24°40' - 4°23'	26°81' - 2°50'	26°27' - 2°50'

Angle of view 1/2 -inch camera (Wide – Tele)

Horizontal	30°52' - 1°33'	42°47' - 7°43'	45°11' - 4°58'	45°38' - 5°00'
Vertical	23°01' - 1°10'	32°42' - 5°50'	34°38' - 3°46'	34°57' - 3°46'

Americas:
 Bosch Security Systems, Inc.
 130 Perinton Parkway
 Fairport, New York, 14450, USA
 Phone: +1 800 289 0096
 Fax: +1 585 223 9180
 security.sales@us.bosch.com
 www.boschsecurity.us

Europe, Middle East, Africa:
 Bosch Security Systems B.V.
 P.O. Box 80002
 5600 JB Eindhoven, The Netherlands
 Phone: + 31 40 2577 284
 Fax: +31 40 2577 330
 emea.securitysystems@bosch.com
 www.boschsecurity.com

Asia-Pacific:
 Robert Bosch (SEA) Pte Ltd, Security Systems
 38C Jalan Pemimpin
 Singapore 577180
 Phone: +65 6319 3453
 Fax: +65 6319 3499
 apr.securitysystems@bosch.com
 www.boschsecurity.com

Represented by