

DS-2CE56D1T-(A)VFIR

HD 1080P Indoor Vari-Focal IR Dome Camera

- 1/2.7" (2 MP) High-Performance CMOS
- Analog HD Output, Up to 1080p Resolution
- 2.8 to 12mm Vari-Focal Lens
- True Day / Night, Smart IR
- Up to 98 ft (30 m) IR Distance
- OSD Menu
- 24 VAC (-A) / 12 VDC
- Up the Coax (HIKVISION-C Protocol)




Hikvision 2CE56D1T-(A)VFIR Indoor Vari-Focal IR Dome Cameras are a versatile solution for all of your security needs. They feature a wide range viewing angle that captures images with a resolution of 1080p at up to 30 fps. The Vari-Focal Dome Network Camera supports the Hikvision-Up-the-Coax protocol, and is equipped with an IR lamp with a range of up to 98 ft (30 m), which facilitates nighttime recording.

Available models:

DS-2CE56D1T-(A)VFIR
DS-2CE56D1T-(A)VFIRB

Dimensions

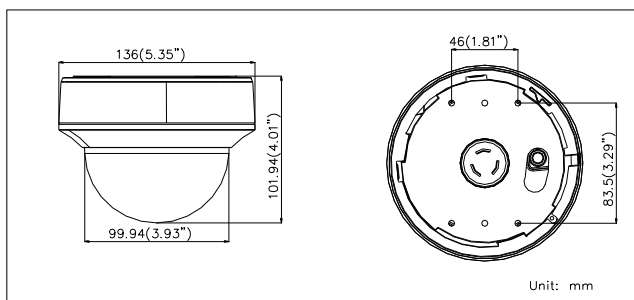

DS-2CE56D1T-(A)VFIIR	
Camera	
Image Sensor	1/2.7" (2 MP) CMOS Image Sensor
Signal System	PAL / NTSC
Effective Pixels	1984 (H) x 1105 (V)
Minimum Illumination	0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR; 0.014 Lux @ (F1.4, AGC ON), 0 Lux with IR
Shutter Time	1/25 (1/30) s to 1/50,000 s
Lens	2.8 to 12 mm @ F1.4
	Angle of view: 105.2° to 32.8°
Lens Mount	Ø14
Day and Night	ICR
3-Axis Positioning	Pan: 0 to 355°, tilt: 0 to 75°, rotation: 0 to 355°
Synchronization	Internal synchronization
Video Frame Rate	1080p @ 25 fps / 1080p @ 30 fps (PAL / NTSC)
HD Video Output	1 analog HD-TVI output
S/N Ratio	> 62 dB
Menu	
AGC	High / medium / low / off
D/N Mode	Smart IR / color / BW
White Balance	Auto / manual
BLC	Support
Language	English
Functions	Digital noise reduction, mirror
AGC	High / medium / low / off
General	
Operating Conditions	-4° F to 113° F (-20° C to 45° C), Humidity 90% or less (non-condensing)
Power Supply	24 VAC ± 15%, 12 VDC ± 15%, -A: 12 VDC ± 15%
Power Consumption	Maximum 3 W, -A: maximum 4 W
IR Range	Up to 30 m
Communication	Up-the-Coax Protocol: HIKVISION-C (TVI output)
Dimensions	Φ136 × 101.94 mm (Φ 5.35" × 4.01")
Weight	1.32 lbs (600 g)

Accessories

			
PM Pole mount	WMS + PC135 Wall mount	WML + PC135 Wall mount with Junction box	CPM + PC130 Pendant mount
			
RCM-3 In-ceiling mount	CM Corner mounting	DS-1H18 Video balun	X41T Camera tester