

TC9200 Series Indoor Camera Mounts



- **▶** Sturdy Construction
- ► Attractive Appearance
- Versatile Design
- Adjustable
- ► Wide Selection of Styles
- Lightweight

The TC9200 Series Indoor Camera Mounts can be used with CCD cameras with fixed and varifocal lenses. These sturdy, attractive mounts have fully adjustable mount heads and standard 1/4-20 camera mounting bolts. Maximum load capability ranges from 2 kg (4.4 lb) to 10 kg (22 lb). These versatile models can be used as pedestal, wall, or ceiling mounts and are well suited for use with CCD cameras.

Functions


Model TC9208 is an economical 200 mm (8 in) general purpose mount for loads of up to 4 kg (8.8 lb). It has an aluminum finish and an adjustable sleeve ball mounting clamp for camera position adjustments.

The TC9202 model is an extendible wall mount with a range of length from 244 mm to 414 mm (9.6 in to 16.3 in). It can accommodate loads of up to 10 kg (22 lb) in both the short and the fully extended configurations and features a quick release screw head for ease of camera positioning.

The TC9210U indoor mount is configured for mounting cameras in indoor applications. It accommodates loads of up to 4.5 kg (10 lb) and is constructed of aluminum and steel, providing extremely rigid camera mounting.

Featuring threaded extensions, this unit can be configured to three different lengths and is easily installed with the included mounting hardware. This unit can be used with many model CCD cameras.

Installation/Configuration Notes




TC9208 Indoor Camera Mount

Maximum Load 4 kg (8.8 lb)

Mounting Head Adjustable 360° pan, 90° tilt

Mounting Bolt Standard 1/4-20
Finish Aluminum
Weight 230 g (0.44 lb)

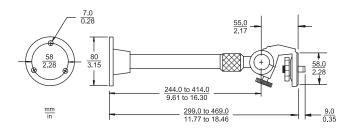


TC9202 Indoor Camera Mount

Maximum Load 10 kg (22 lb)

Mounting Head Adjustable 360° pan, 90° tilt

Mounting Bolt Standard 1/4-20
Finish Aluminum and black
Weight 510 g (1.1 lb)




TC9210U Indoor Camera Mount


Maximum Load 4.5 kg (10 lb)

Mounting Head Adjustable 360° pan, 180° tilt Finish Off-white semi-gloss acrylic


Weight:

With Wall/Ceiling Flange $291 \,\mathrm{g} \,(0.64 \,\mathrm{lb})$ With T-Bar Clip $245 \,\mathrm{g} \,(0.54 \,\mathrm{lb})$





Wall/Ceiling Mount Flange, Included with TC9210U Solid Wall/Ceiling Mount



T-Bar Ceiling Clip

Included with TC9210U Solid Wall/Ceiling Mount.

Ordering Information	
TC9202 Indoor Camera Mount extendible wall mount, for 9.6-inch to 16.3- inch, 10 kg (22 lb) max load, aluminium/black finish	TC9202
TC9208 Indoor Camera Mount general purpose mount, for 8-inch, 4 kg (8.8 lb) max load, aluminum finish	TC9208
TC9210U Indoor Camera Mount universal wall/ceiling grid, for 6-inch, 4.5 kg (10 lb) max load, off-white finish, incl. T-Bar ceiling clip and wall/ceiling mount flange	TC9210U
TC9210US Indoor Camera Mount universal wall/ceiling grid, for 6-inch, 4.5 kg (10 lb) max load, off-white finish, incl. T-Bar ceiling clip and wall/ceiling mount flange, silver	TC9210US

Americas:
Bosch Security Systems, Inc.
130 Perinton Parkway
Fairport, New York, 14450, USA
Phone: +1 800 289 0096
Fax: +1 585 223 9180
security,sales@us.bosch.com
www.boschsecurity.us

Europe, Middle East, Africa: Bosch Security Systems B.V. P.O. Box 80002 5600 JB Eindhoven, The Netherlands Phone: + 31 40 2577 284 Fax: +31 40 2577 330 emea.securitysystems@bosch.com www.boschsecurity.com

Asia-Pacific: Represented by
Robert Bosch (SEA) Pte Ltd, Security Systems
11 Bishan Street 21
Singapore 573943
Phone: +65 6258 5511
Fax: +65 6571 2698
apr.securitysystems@bosch.com
www.boschsecurity.com