

PMAX-0208



PoE Explosion Proof Housing with Heater, Fan and Bracket

► Specifications


Device

Product Type	Box Camera Housing
Description	PoE Explosion Proof Housing with Heater, Fan and Bracket

General

Power Source	High PoE (IEEE802.3at)
Power Consumption	25.5 W (PoE)
Weight	9000g (19.842lb)
Dimensions	(Ø x L): 132mm x 400mm (5.20" x 15.75")
Environmental Casing	Weatherproof (IP68), Explosion proof
Fan	Yes, 40°C / 104°F (fan on), 30°C / 86°F (fan off)
Heater	Yes, 15°C / 59°F (heater on), 24°C / 77°F (heater off)
Approvals	IP68, ATEX II 2G Ex d IIB T6 Gb (EN 60079-0, EN 60079-1), TS Ex d IIC T5 T6 Gb, TS Ex tb IIIC T100°C Db
Color	Silver
Material	Stainless Steel 316
Warranty	1 Year(s). For extended warranty offering, see http://www.acti.com/support/warranty

► Dimension Diagram

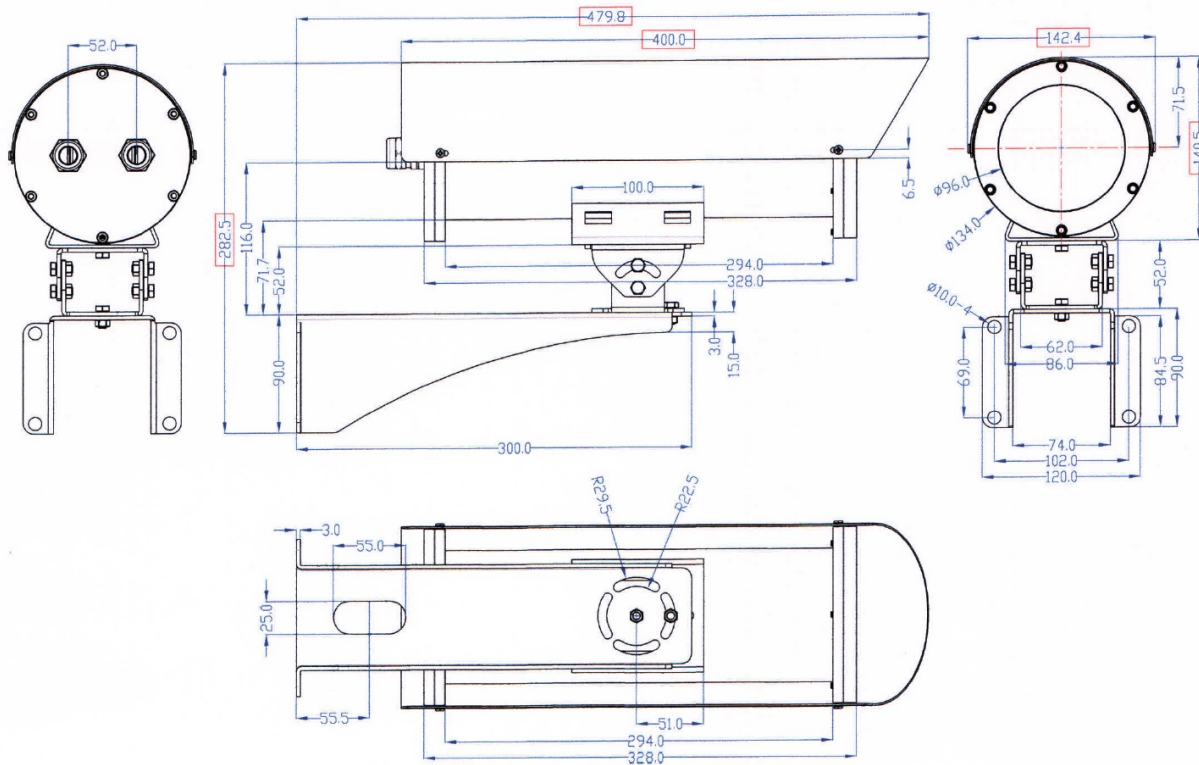

Unit: mm [inch]

► Related Products

Box - Box

A24		5MP Box with D/N, Extreme WDR, SLLS, Vari-focal lens, f3.6-10mm/F1.5-2.8 (HOV:88.7°-38.1°), P-Iris, Auto Back Focus, H.265/H.264, 1080p/60fps, 2D+3D DNR, Built-in Microphone, MicroSDHC/MicroSDXC, PoE/DC12V, DI/DO, RS-485
E217		2MP Video Analytics Box with D/N, Extreme WDR, SLLS, Fixed lens, f2.93mm/F2.0 (HOV:101.3°), H.264, 1080p/60fps, 2D+3D DNR, Audio, MicroSDHC/MicroSDXC, PoE/DC12V, DI/DO, RS-422/RS-485, Built-in Analytics
E24A		3MP Box with D/N, Superior WDR, Vari-focal lens, f2.8-12mm/F1.4 (HOV:78.1°-26.8°), DC iris, H.264, 1080p/30fps, DNR, Audio, MicroSDHC/MicroSDXC, PoE, DI/DO

Box - Zoom Box

B23		3MP Zoom Box with D/N, Superior WDR, 10x Zoom lens, f4.9-49mm/F1.6-3.0 (HOV:49.56°-5.62°), DC iris, Auto Focus, H.264, 1080p/30fps, 2D+3D DNR, Audio, MicroSDHC/MicroSDXC, PoE/DC12V, DI/DO, RS-422/RS-485
B26		3MP Video Analytics Zoom Box with D/N, Extreme WDR, SLLS, 36x Zoom lens, f4.6-165.6mm/F1.55-5.0 (HOV:57.6°-2.35°), DC iris, Auto Focus, H.265/H.264, 1080p/60fps, 2D+3D DNR, Audio, MicroSDHC/MicroSDXC, PoE/DC12V, DI/DO, RS-422/RS-485, Built-in Analytics

I27		4MP Zoom Box with D/N, Advanced WDR, SLLS, 30x Zoom lens, f4.3-129mm/F1.6-5.0 (HOV:58.9°-2.11°), DC iris, Auto Focus, H.264, 1080p/30fps, 2D+3D DNR, Audio, MicroSDHC/MicroSDXC, PoE/DC12V, DI/DO, RS-422/RS-485
I29		2MP Video Analytics Zoom Box with D/N, Extreme WDR, ELLS, 36x Zoom lens, f4.6-165.6mm/F1.55-5.0 (HOV:62.7°-2.7°), DC iris, Auto Focus, H.264, 1080p/60fps, 2D+3D DNR, Audio, MicroSDHC/MicroSDXC, PoE/DC12V, DI/DO, RS-422/RS-485, Built-in Analytics

Power Supply Accessories - PoE Injector

PPOE-0101		High PoE Injector IEEE 802.3at compliant, AC 100~240V, with universal connectors (for A416, A418, B913, B923, B934, Q450, Q75, VMGB-400, VMGB-603, VMGB-604, Z36, Z37, Z71, Z710, Z952)
-----------	---	---

Network & Storage Peripherals - Data Switch

PPSW-0105		PLANET GS-4210-8P2C 8-Port Gigabit 802.3at Managed PoE Switch (PoE Budget 120W)
PPSW-1101		PLANET GS-4210-24PL4C 24-Port Gigabit 802.3at Managed PoE Switch (PoE Budget 440W)
PPSW-2101		4-Port 802.3at PoE Switch (PoE Budget 62W)
PPSW-3100		PLANET FGSW-1816HPS 16-Port 802.3at PoE Switch (PoE Budget 220W)