

DESCRIPTION:


The IS-DVF-RP10 is a video door station for the IS Series with a built-in HID multiCLASS SE® card reader.

The video door station can be connected via CAT-5e/CAT-6 wire to the following IS exchange units: IS-CCU, IS-SCU. Maximum distance from the door station to the exchange unit is 980'.

Wiring and power for the card reader are separate from the intercom wiring. The card reader is to be connected to a host controller of any type that is compatible with the HID multiCLASS SE® RP10 card reader. Flush mount with supplied back box or surface mount with SBX-ISDVFP.

FEATURES:

- Video door station for IS Series
- Stainless steel faceplate
- Directory strip
- HID multiCLASS SE® RP10 card reader built-in
- Tamper resistant screws

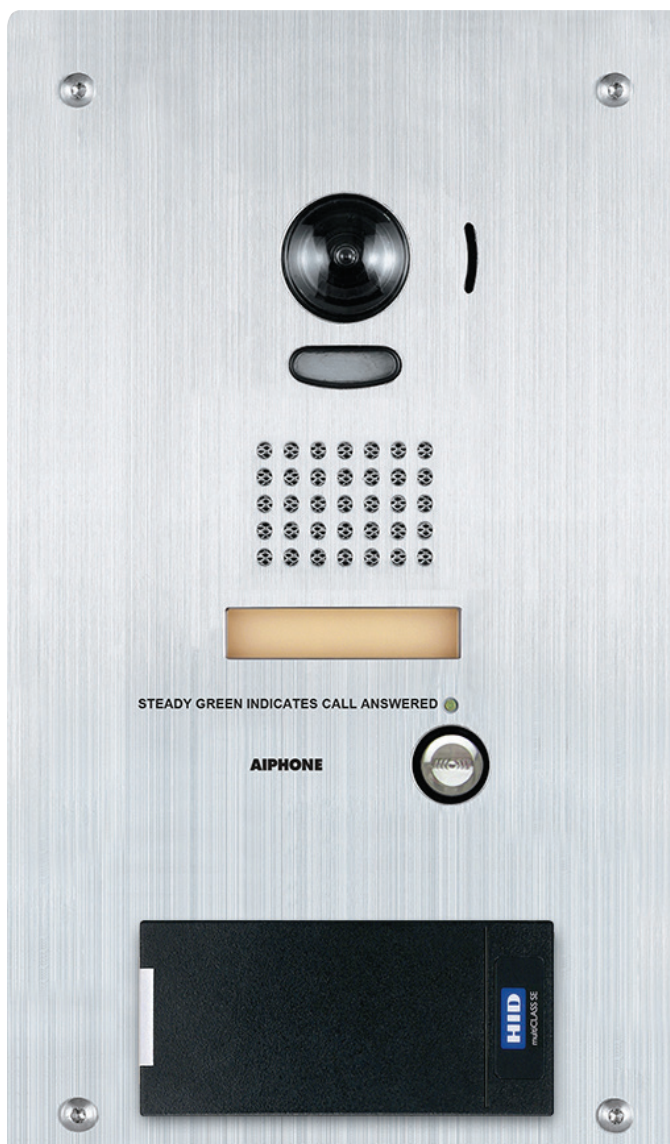

IS-DVF-RP10

Stainless Steel Flush Mount Video Door Station with HID multiCLASS SE® Reader

FEATURE CALL-OUT DEFINITIONS:

- [1] Camera
- [2] Microphone
- [3] White LED illuminator
- [4] Speaker
- [5] Directory card
- [6] Call status indicator
- [7] Call button
- [8] Card reader

SPECIFICATIONS:

- | | |
|--------------------|-------------------------------------|
| Power Source: | 48VDC (supplied from CEU) |
| Communication: | Open voice hands-free |
| Camera: | 1/4" color CMOS |
| Min. illumination: | 5 Lux |
| Wiring: | CAT-5e or CAT-6 |
| Wiring distance: | 980' |
| Door release: | 24V AC/DC, 500mA
(N/O, COM, N/C) |
| Operation Temp: | 14° - 140°F (-10° - 60°C) |
| Dimensions: | 12-3/8" H x 7" W x 1-7/8" D |

FEATURE CALL-OUTS:

