

IX-DVF-P


Vandal Resistant IP Color Video Door Station
with built-in HID multiCLASS SE® Card Reader

-INSTRUCTIONS-

The IX-DVF-P is an IX Series IP color video door station with a multiCLASS SE® Card Reader built into the same stainless steel faceplate. The card reader provides electronic access to a building through a separate Access Control System, which is not supplied by Aiphone.

The video door station portion of the IX-DVF-P will connect directly to a network switch. Refer to the IX2 QuickStart Guide or IX Support Tool Setting Manual for programming information.

IX-DVF-P

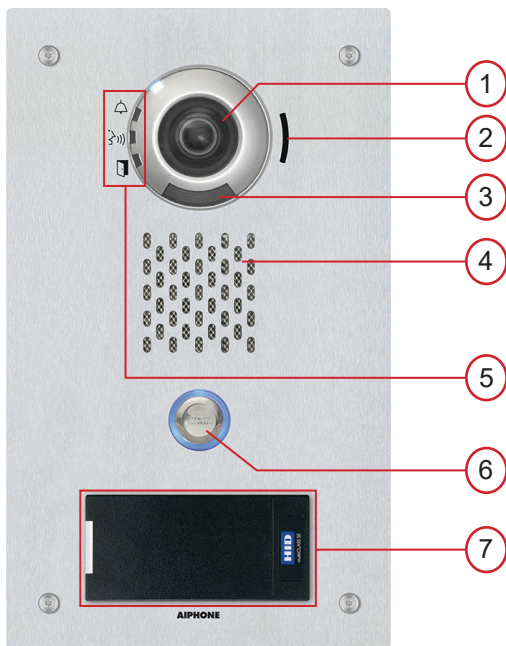



NAMES & FUNCTIONS:

- | | |
|---------------|------------------------------|
| 1. Camera | 5. Function indicators |
| 2. Microphone | 6. Call button |
| 3. LED Light | 7. multiCLASS SE RP10 Reader |
| 4. Speaker | |

FEATURES:

- All-in-one solution: Communication product & card reader
- If a card is missing or malfunctioning, audio/video communication can provide user verification
- Standard Wiegand output to access panel
- Convenience of installing combined components


PACKAGE CONTENTS:

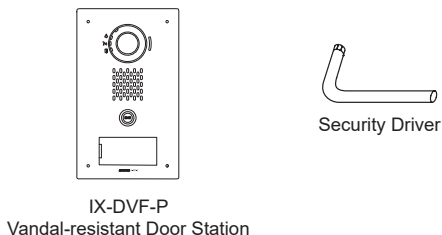

INSTALLATION:

- For flush mounting, cut a hole in the wall and use the supplied back box.
Box dimensions are: 10-⁷/₁₆" H x 5-¹³/₁₆" W x 2-³/₈" D
- For surface mounting, use the SBX-IDVFRA surface mount box.
This box can mount to a standard 1 gang box or to any flat surface.

WIRING DIAGRAM:

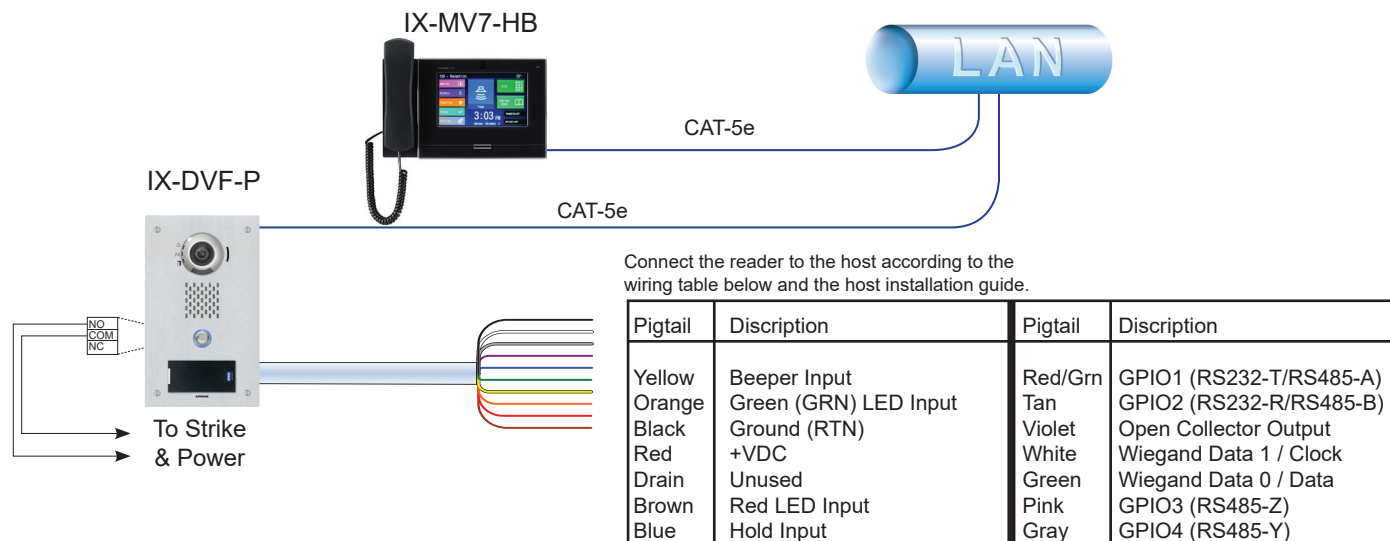

TESTING & OPERATION:

- When power is applied to the multiCLASS SE® reader, the LED will turn RED and the beeper will beep 3 times (the last tone is a higher frequency). The LED will then flash once after the last tone. This indicates that the microcontroller is operating properly.
- Present an ID card to the reader (hold card directly in front of reader). The LED will momentarily turn green while the beeper beeps once, indicating that the card was read successfully.

SPECIFICATIONS:

CARD READER:

Reader model: RP10
Power Source: 5 ~ 16V DC
Current: 75mA (Avg); 200mA (peak)
Transmit Freq. 13.56 MHz & 125 kHz
Terminations: Color-coded pre-wired pigtail
Wiring Distance: 500'
Operating Temp: -31° ~ 150°F / -35° ~ 65°C
Operating Humidity: 5-95% relative humidity non-condensing

CAMERA/INTERCOM:

Camera unit: 1/3" CMOS 1.23 megapixel
Min. illumination: 5 Lux
Terminations: RJ45 jack for audio/video
Pigtail for door release
Operating Temp: -40° ~ 140°F / -40° ~ 60°C
Wiring Distance: 330' with Cat-5e/6 cable
Dimensions: 11-11/16" H x 7" W x 2-3/8" D

FCC WARNING:

This device complies with Part 15 of the FCC rules.

Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference.
 - (2) This device must accept any interference that may cause undesired operation.
- For proper regulatory compliance, the drain wire should be disconnected at the power supply end of the cable.
 - Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.
 - The Reader is intended to be powered from a limited power source output of a previously certified power supply