



VZ-75IBX-T ADVANTAGES

- 74.5" 4K UHD LED Panel
- Supports 4K (3840X2160) Resolution
- Supports HDMI (2.0 & 1.4), YPbPr, AV, VGA
- Supports **Touch Screen**
- USB - **Media Player**
- Digital & Analog Inputs
- HDMI & AV Loop-through
- Wide Viewing Angle (IPS Panel)
- Universal Wall Mounting & Auto Source Recovery


MODEL #		VZ-75IBX-T
VIDEO		
Screen Size	74.5"	
Max. Resolution	3840 x 2160 @60Hz	
Pixel Pitch	0.429 mm x 0.429 mm	
Brightness	350cd/m ² (Typical)	
Contrast Ratio	1200:1	
Aspect Ratio	16 : 9 (1.78 : 1)	
Viewing Angle (H/V)	178° / 178°	
Display Color	1.07G	
Response Time	< 8 ms	
INTERFACE		
HDMI (2.0) In / Out	4 / 1	
HDMI (1.4) In	1	
YPbPr In	1	
AV In / Out	1 / 1	
VGA In (15Pin D-Sub)	1	
SPDIF (Optical) Out	1	
RS232 (RJ-45) In	1	
USB In (Media)	5 (USB 3.0 x 3 USB 2.0 x 2)	
USB In (Under OPS - Mouse, Keyboard, U-Disk)	2	
USB In (Touch)	1	
RJ45 (10/100M) In	1	
Audio Out	1	
PC Audio In	1	
ANDROID BOARD SPEC		
Android OS	Ver 5.0	
CPU	Quad Core, Cortex-A53, 1.4GHz	
RAM	2GB DDR3	
Storage	8GB (Nand-Flash)	
SPECIAL FEATURES		
Image Retention	YES	
Touch	Sensor Type	Infrared Touch Frame
	Surface Protection	4mm Toughened Glass
	Response Time	< 15ms
	Touch Accuracy	90% ± 2mm
	Output Mode	HID Standard
	Theory Clicks	Unlimited
	Minimum Touch Object	≥ 6 mm
USB Media Player	Video Codec	MPEG1/2, MPEG4, DivX 3.11/4.12/5.x/5, XviD, H.263, H.264, MVC, AVS, WMV3, VC1, Motion JPEG, VP8/9, RV30/40
	Video Format	MPEG, AVI, MOV, MP4, MKV, RM, 3GP, FLV, WebM, ASP
	Image Format	JPEG, PNG, BMP
	Music Format	mp3, mp4, wma
	Capacity	Max 32 GB

REFRESH RATE	
HDMI (2.0) In	3840 x 2160 @ 60Hz
HDMI (1.4) In	3840 x 2160 @ 30Hz
VGA In (15Pin D-Sub)	1920 x 1080 @ 60 Hz
DIMENSIONS & WEIGHT	
Outline Dimension (W x H x D)	68.68" x 41.85" x 4.35"
	1744.61 mm x 1063.16 mm x 110.7 mm
Net Weight / Gross Weight	141.20 lbs (64.05kg) / 173.72 lbs (78.8kg)
AUDIO	
Built in speaker	15W x 2
MOUNT	
Universal Wall Mount	600 x 400 mm (4 x M8)
GENERAL	
Transmitter - IR Remote Control	YES
Housing	Sheet Black Aluminium
Power	Electrical Ratings
	Consumption
	AC100 ~ 240V(50/60Hz)
	≤ 400 W / ≤ 0.5 W (Standby)
Operating Temperature	32 ~ 104°F / 0 ~ 40°C
Storage Temperature	14 ~ 140°F / -10 ~ 60°C
Operating Humidity	20 ~ 80% RH
Storage Humidity	10 ~ 60% RH
Regulations	FCC (A), RoHS
Language (OSD)	English
Accessories	Manual (1pc), Power Cable (1pc), USB Cable (1pc), Remote Controller (1pc), Wall Mount (1set), Touch Pen (2pc), HDMI Cable (1pc) Mobile Stand (Option)


Contact ViewZ

- Address : 177 W. Orangethorpe Ave., Placentia, CA 92870
- Phone : (714) 996-1177, Fax : (714) 996-1138
- Sales : sales@viewzusa.com
- Specification subject to change without notice.

DIMENSIONS

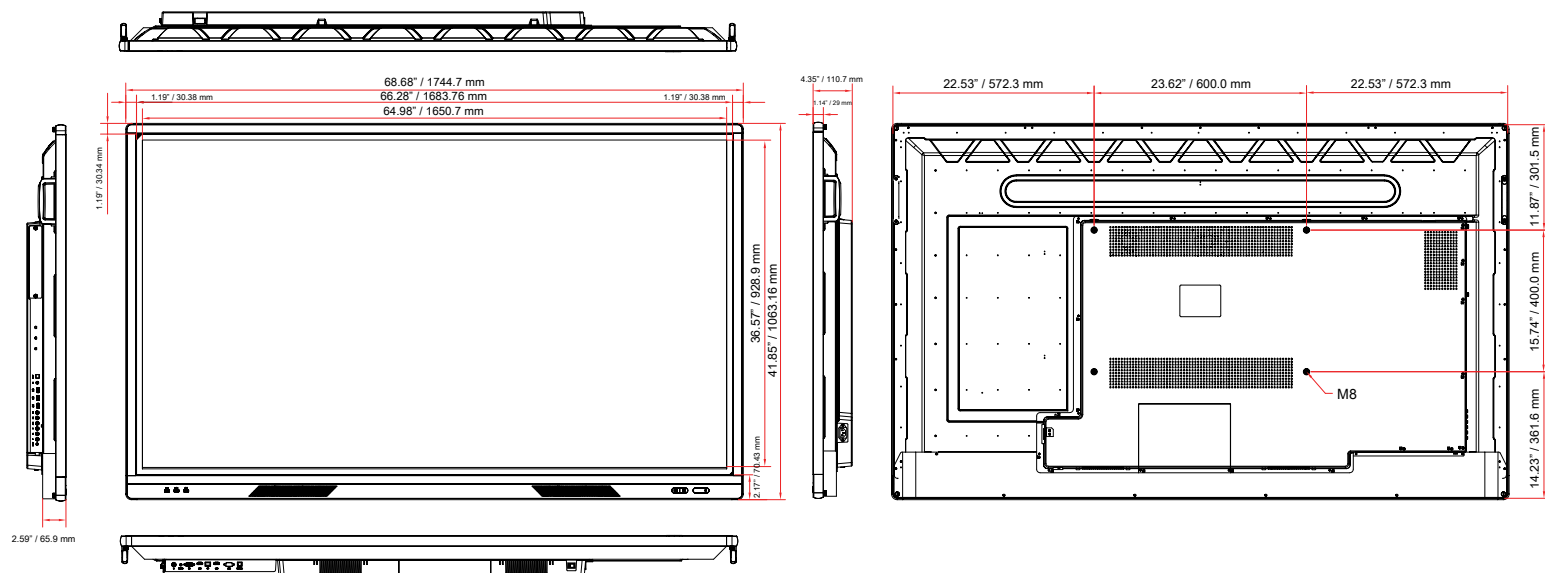

INTERFACE

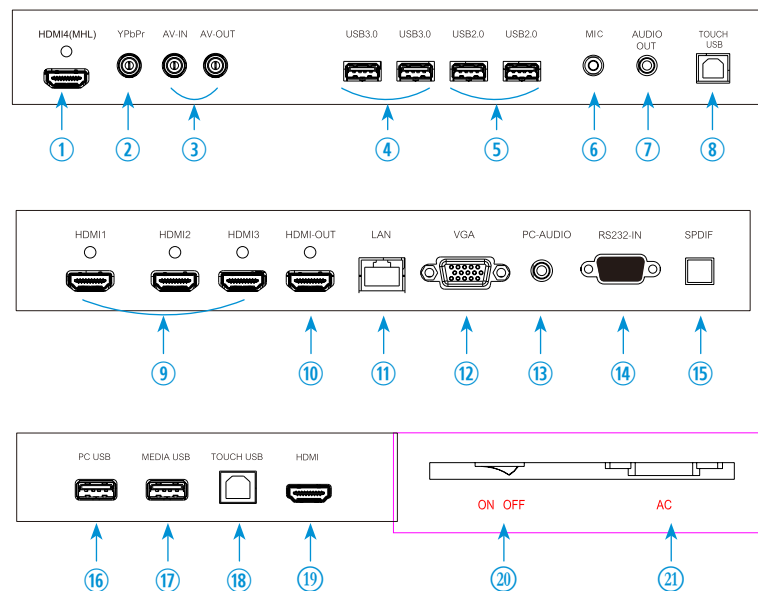

1. HDMI IN
2. Y Pb Pr IN
3. AV IN / OUT
4. USB IN (3.0) x 2
5. USB IN (2.0) x 2
6. MIC IN
7. AUDIO OUT
8. USB IN (Touch)
9. HDMI IN (x3)
10. HDMI OUT
11. RJ-45 IN
12. VGA IN
13. PC-AUDIO
14. RS232
15. SPDIF
16. USB IN (PC)
17. USB IN (Media)
18. USB IN (Touch)
19. HDMI In
20. POWER On/Off
21. AC 100-240V IN

Contact ViewZ

- Address : 177 W. Orangethorpe Ave., Placentia, CA 92870
- Phone : (714) 996-1177, Fax : (714) 996-1138
- Sales : sales@viewzusa.com
- Specification subject to change without notice.