

Title:	RN Thermal	Version:	v5.5.26	Date:	042020
Product:	Hikvision Thermal Cameras	Build:	200330	Page:	1 of 2
Action Required:	None, Information Only				

■ Summary

The latest firmware is v5.5.26, build 200330. The main upgraded content is as follows:

- Change to forehead thermometer to show the highest temperature on the forehead area passively.
- Reduced false alarms caused by corners of the eyes, corners of the mouth, and hot objects in the background.

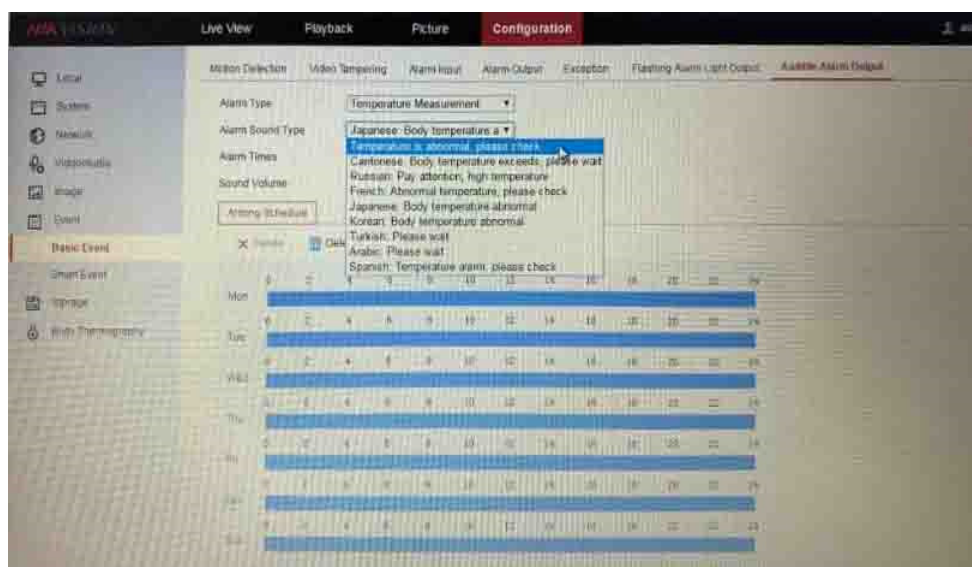


Figure 1, Configuration > Basic Event

- PA device alarm voice supports the selection of other languages (Japanese, Korean, Arabic, Turkish, Russian, French, Spanish, Italian)
- Added distance measurement mode:
 - **Self-Adaption Mode** calculates the temperature compensation value according to the pupil distance when a face is detected.
 - **Fixed Distance Mode** calculates the temperature compensation value according to the fixed distance when the side face exceeds one second.

Title:	RN Thermal	Version:	v5.5.26	Date:	042020
Product:	Hikvision Thermal Cameras	Build:	200330	Page:	2 of 2
Action Required:	None, Information Only				

CAUTION: At present, **Self-Adaption Mode** could cause abnormal temperature measurement when a side face appears. Please ensure that people being measured always face the camera, otherwise, use **Fixed Distance Mode**.

The screenshot shows the 'Basic Settings' tab for 'Body Thermography configuration'. The left sidebar lists various settings categories, with 'Basic Settings' and 'Face Capture' highlighted. The main panel contains the following settings:

- Channel No.:** Camera 01 (dropdown)
- ☒ Enable Temperature Measurement
- ☒ Enable Color-Temperature
- ☒ Display Temperature Info. on Stream
- ☐ Add Original Data on Capture
- ☐ Add Original Data on Stream
- Data Refresh Interval:** 3 s (dropdown)
- Unit:** Degree Celsius(°C) (dropdown)
- Temperature Range:** 30.0~45.0 (dropdown)
- Version:** V2.0.8build20200327 (text)
- Target Thermography Parameters:**
 - Emissivity:** 0.98 (text)
 - Distance Mode:** Self-Adaption (dropdown, highlighted with a red box)
 - Distance:** 8 m (text)
- Save** button (red)

Figure 2, Basic Settings, Distance Mode

- Face capture function (Upload Captured Face Image) in overseas devices is not enabled by default.