

Monitor the blind spot in your building security

- Improve tenant experience Passengers will feel safer with increased security
- Video verify emergency call requests
- Eliminate Non-emergency 911 service fees






- Real-Time video for better risk management
- Deter equipment vandalism, save costly repairs
- Mitigate risk & liability from accidents or criminal behavior



The Connected Elevator is Safe, Smart and Wireless

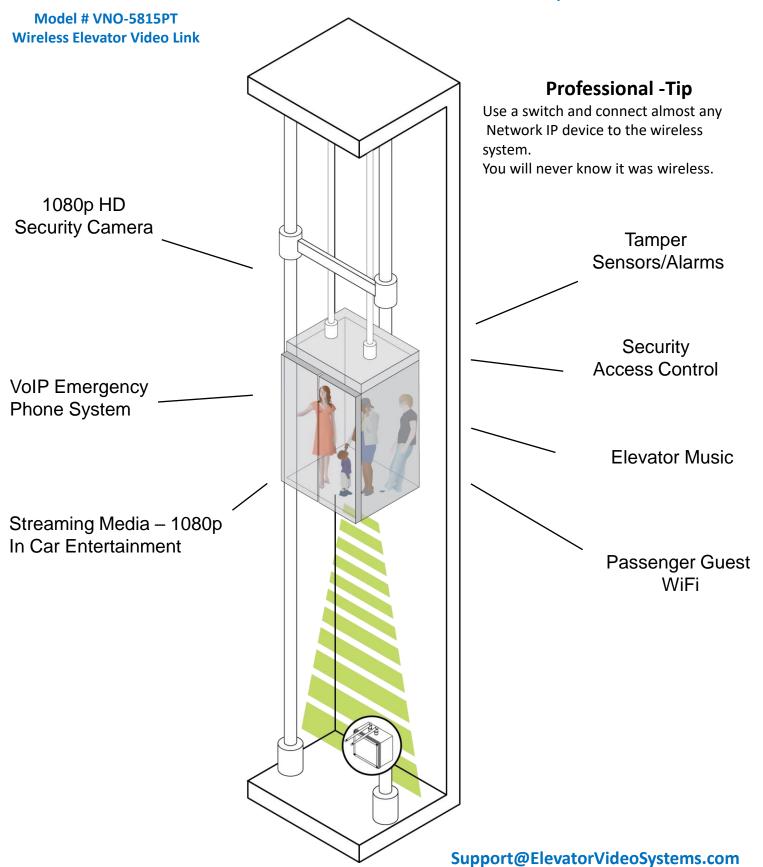





Economical solution vs cabled security cameras

- ✓ Wireless vandal proof security camera with Real-Time 1080p Video quality
- Fast installation for minimal tenant interruption
- Requires zero maintenance and eliminates costly inspections
- ✓ Easy integration with exisiting video networks & security devices
- Safety Certified Complies with ASME, TSSA, UL safety standards
- FCC & Industry Canada certified

Contact us Now

For more information on a wireless elevator video solution or to connect with an elevator video specialist,



Send us an email:

Support@ElevatorVideoSystems.com 289-271-7979 / Toll Free 844-246-4646 Monday – Friday 8:30 AM to 5:00 PM EST

www. ElevatorVideoSystems.com

Wireless Elevator Video Solutions since 2008





VNO-5815PT - Wireless Elevator Video Link



Wireless Elevator System

- **Security Professional #1 Recommended**
- **Economical Wireless Solution vs. Cabling / Hardwired**
- **Designed for Reliable Streaming High Speed Data**
- **Fast Installation for Minimal Tenant Interruption**
- **Compatible with any Network IP device**
- 3-Year Warranty

| Model # VNO-5815PT | SPECIFICATIONS |
|---------------------|--|
| Operating Frequency | 5.185GHz – 5.825GHz (Programmable) |
| Protocol | 802.11a/n OFDM |
| Security | AES 128 Bit Encrypted Data System + Hidden SSID |
| Programming | Embedded Software / Pairing Switch Selection |
| Operating Range | 200 Floors |
| Antenna Type | Tx = Embedded Directional Rx = External Omindirectional |
| Operating Voltage | 48VDC PoE - Injectors NOT included |
| Construction | IP-67 Rated UL Listed All-Weather Polycarbonate Design |
| | IK08 Impact protection / Flammability Rated 94-V-0, 5VA, HB |
| Dimensions | 180mm x 180mm x 100mm (7.0" x 7.0" x 4.0") each enclosure |
| Veight | 880g (1.94lbs) each enclosure - approx |
| Operating Temp | -40°C to 77°C (-40F to +170F) |
| Approvals | FCC / Industry Canada / UL Listed Enclosures |
| Kit Includes | Transmitter + embedded antenna / Receiver + Omni directional A |
| | Universal Stainless Mounting Brackets |
| Warranty | Three Years |
| | |

Support@ElevatorVideoSystems.com

289-271-7979 / Toll Free 844-246-4646 Monday - Friday 8:30 AM to 5:00 PM EST









