



IE9111-O

AI-Box

Edge AI Device • Driven by OSSA • S&ST OS • VCA

- Powered by Qualcomm QCS605 SoC with Built-in AI Engine
- Powerful Computing for Video Processing and Machine Learning
- Driven by OSSA, Running on S&ST OS (Based on Android Open Source Project)
- Supports a Variety of VCA Solutions through S&ST APPs
- Enables Any Type of Network Camera to Act as AIoT Device
- RJ-45 Connectors for PoE Connection
- Digital Input*2, Digital Output *2




Overview

VIVOTEK's IE9111-O or "AI-BOX" is an edge computing device that employs the Qualcomm QCS605 chip. It is running on S&ST OS, which is an operating system based on the Android Open Source Project. It can integrate network cameras through the RTSP protocol to obtain images for analysis and calculation for AI-related applications. With AI-BOX, users can upgrade their existing surveillance devices into an AIoT intelligent system.

Since IE9111-O is a Driven by OSSA device, users can download and install Apps on IE9111-O via the S&ST App Store, and empowers network cameras with various intelligent video content analysis applications such as facial recognition, license plate recognition, and behavior detection. Users can install and operate multiple Apps on IE9111-O at once for more versatile, intelligent, and effective applications.

The IE9111-O is equipped with Octa-Core SoC based on the Qualcomm Vision Intelligence Platform, AI technology, and the neural processing engine of the Adreno 615 GPU, Spectra ISP and Hexagon DSP. It supports hardware acceleration for deep learning, powerful visual computing and edge computing performance that can optimize AI image processing capabilities.

AI-Box Solution

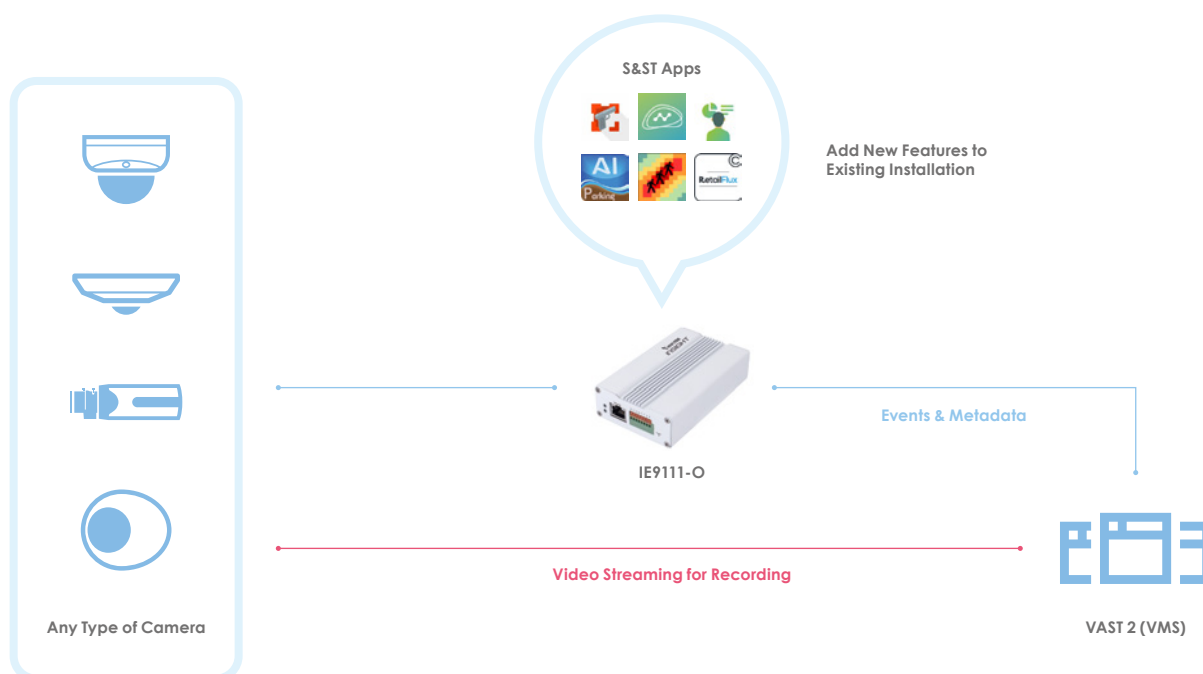

Technical Specifications

Model	IE9111-O (RJ-45)
System Information	
SoC	Qualcomm QCS605 Kryo™ 300 CPU, Octa-core CPU (2x2.5GHz, 6x1.7Ghz)
GPU	Qualcomm® Adreno™ 615 GPU API Support: OpenGL® ES 3.2, Vulkan® 1.1, OpenCL
AI Engine	NPU: Qualcomm® Neural Processing SDK, ONNX, TensorFlow, Android NN, Caffe, 2.1 TOPS@1w, Caffe2 AIE DSP: Qualcomm® Hexagon™ 685 DSP AIE GPU: Qualcomm® Adreno™ 615 GPU
Decoding	H.264/H.265: 30 fps @ 3840 x 2160 (4K)
Flash	16 GB
RAM	4 GB
OS	S&ST OS – Android 8.1
Channel	1-CH/RTSP Streaming
Network	
Protocols	DHCP, DNS, HTTP, HTTPS, IPv4, IPv6, RTSP/RTP/RTCP, NTP, TCP/IP
Interface	10 Base-T/100 Base-TX/1000 Base-T Ethernet
Solution Integration	
VCA	Supported by S&ST APPs
Embedded App	VAST 2 Data Magnet Integration App
General	
Connectors	RJ-45 cable connector for 10/100/1000 Mbps Network/PoE connection*1 Digital input*2 (Dry contact) Digital output*2 (Dry contact)
LED Indicator	System power and status indicator
Power Input	IEEE 802.3af Class3 PoE
Dimensions	123 x 74 x 30 mm
Weight	230 g
Safety Certifications	CE, FCC Class A, EN62368, IEC60571, UL, VCCI, CB
Operating Temperature	-25°C ~ 55°C (-13°F~131°F)
Warranty	36 Months
System Requirements	
Web Browser	Windows: Mozilla Firefox, Chrome, Microsoft Edge Mac OS: Safari Linux: Chrome



Dimensions

