

32-channel 4K Network Video Recorder

1.5U Smart H.265+ Dual NIC Network Video Recorder



System Overview

Dahua's Pro Series network video recorders offer excellent performance and high recording quality for IP video surveillance applications. For applications where details are critical for identification, this professional NVR provides a powerful processor with up to 4K resolution. Additionally, the NVR features a mouse shortcut operation menu, remote management and control, center storage, edge storage, and back up storage.

Designed as a cost-effective and easy to install recorder, this NVR is an ideal addition to any security system that monitors public spaces, water conservancy, transportation, city centers, schools, and financial institutions.

The NVR is compatible with numerous third-party devices making it the perfect solution for surveillance systems with or without a video management system (VMS). Its open architecture supports multi-user access and it is compatible with ONVIF 2.4, enabling interoperability when combined with 4K cameras.

Functions


4K Resolution

4K resolution is a revolutionary breakthrough in image processing technology. 4K delivers four times the resolution of Full HD 1080p devices and offers superior picture quality and image details. 4K resolution improves the clarity of a magnified scene to view or record crisp forensic video from large areas.

Smart Motion Detection+

Smart Motion Detection+, a component of Dahua's Analytics+ technology, improves alarm accuracy and decreases the number of false alarms. The advanced SMD+ algorithm analyzes a scene for human or vehicle motion, while filtering out other motion due to trees, leaves, animals, weather, and triggers an alarm when detected¹.

- Dual NIC Supports Multi-Address, Fault Tolerance, and Load Balance
- Smart H.265+ and Smart H.264+ Video Compression
- Maximum 320 Mbps Incoming Bandwidth
- Up to 12 MP Resolution for Preview and Playback
- Two (2) Gigabit Ethernet Connections
- Support for IPC and UPnP Protocols
- Customized Live View Layout with Support for Panoramic Displays
- Intelligent Video System with Business Analytics
- Compatible with Dahua Smart Motion Detection+ Cameras¹

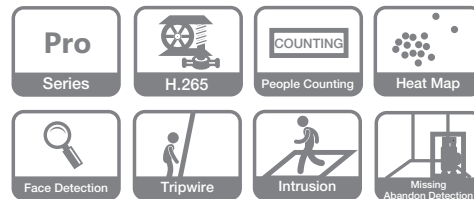

Intelligent Video System (IVS) Recording

With built-in intelligent video analytics, the NVR has the ability to detect and analyze moving objects for improved video surveillance. The NVR provides standard intelligence at the edge allowing detection of multiple object behaviors such as abandoned or missing objects. IVS also supports Tripwire analytics, allowing the camera to detect when a pre-determined line has been crossed, People Counting, ideal for business intelligence, and Facial Detection, for searching or identification of individuals.

Dual NIC

The NVR offers Dual NICs that support Multi-Address, Fault Tolerance, and Load Balance. Multi-Address allows connection to two different network schemes to separate the camera network from the NVR network. Fault Tolerance allows NVR connections to two different switches on a network; if one switch goes down, the NVR swaps to the secondary switch. Load Balancing requires a connection to a managed switch that can switch the NVR between networks depending on network traffic.

Face Detection+ Recording

The NVR stores face detection+ video and data from a dedicated camera with Face Detection+ connected to the NVR. The NVR triggers an event if the camera detects a face with a specific set of features.

Heat Map

The Heat Map option highlights the areas with the highest concentration of people. This information can then be exported into a customized report to assist in business or forensic analysis.

Automatic Network Replenishment Technology (ANR)

Network Video Recorders with the ANR function automatically store video data on an IP camera SD card when the network is disconnected. After recovery of the network, the NVR automatically retrieves the video data stored on the camera.

Technical Specification		
System		
Main Processor		Embedded Quad-core Processor
Operating System		Embedded Linux
Audio and Video		
IP Camera Input		32 Channels (additional PoE switches required)
Two-way Talk		Input: One (1) Channel, RCA Output: Two (2) Channels, RCA
Display		
Interface		Two (2) HDMI Ports: <ul style="list-style-type: none">HDMI-1: 4KHDMI-2: 1080p Two (2) VGA Ports (1080p)
Spot Output		HDMI 2 / VGA 2
Native Output Resolution	HDMI-1	3840 x 2160, 1920 x 1080, 1280 x 1024, 1280 x 720, 1024 x 768
	VGA-1	1920 x 1080, 1280 x 1024, 1280 x 720, 1024 x 768
	HDMI-2 / VGA-2	1920 x 1080
Maximum Decoding		Two (2) Channels of 12MP at 20 fps Four (4) Channels of 8MP at 30 fps Five (5) Channels of 6MP at 30 fps Six (6) Channels of 5MP at 30 fps Eight (8) Channels of 4MP at 30 fps Eleven (11) Channels of 3MP at 30 fps Sixteen (16) Channels of 1080p at 60 fps Sixteen (16) Channels of 1080p/720p at 30 fps
Fisheye Dewarping		Dewarps a single channel at a time
Multi-screen Display		First Screen: 1/4/8/9/16/25/36 Second Screen: 1/4/8/9/16
On-screen Display		Camera Title, Time, Camera Lock, Motion Detection, Recording
Recording		
Compression		Smart H.265+, H.265, Smart H.264+, H.264, MJPEG
Supported IP Camera Resolution		12 MP, 8 MP, 6 MP, 5 MP, 4 MP, 3 MP, 1080p, 1.3 MP, 720p, D1, CIF (The recording rate is dependent on the maximum resolution and frame rate of the connected IP camera.)
Maximum Incoming Bandwidth		320 Mbps
Bit Rate		16 Kbps to 20 Mbps per channel
Record Mode		Manual, Schedule (Regular, Motion Detection), Alarm, IVS, Stop
Record Interval		1 to 120 minutes (default: 60 minutes) Pre-record: 1 to 30 s Post-record: 10 to 300 s
Video Detection and Alarm		
Trigger Events		Recording, PTZ, Tour, Alarm Out, Video Push, Email, Snapshot, Buzzer, and Screen Tips
Video Detection		Motion Detection, MD Zones: 396 (22 x 18), Video Loss and Tampering
Alarm Input		16 Channels
Relay Output		Six (6) Channels,
Playback and Backup		
Sync Playback		1/4/9/16
NVR Video Output		Four (4) Channels at 4K or 16 Channels at 1080p
Search Mode		Time/Date, Alarm, MD and Exact Search (accurate to one second)
Playback Function		Play, Pause, Stop, Rewind, Fast Play, Slow Play, Next File, Previous File, Next Camera, Previous Camera, Full Screen,Backup Selection, Digital Zoom
Backup Mode		USB Device, Network, eSATA Device

Third-party Support	
Third-party Support	Arecont Vision, Airlive, AXIS, Canon, Dynacolor, JVC, LG, Panasonic, Pelco, PSIA, Samsung, Sanyo, Sony, Watchnet and others
Network	
Ethernet	Two (2) RJ-45 Ports (10/100/1000 Mbps), Independent or Joint
Forwarding Bandwidth	320 Mbps
Network Function	HTTP, HTTPS, TCP/IP, IPv4/IPv6, UPnP, RTSP, UDP, SMTP, NTP, DHCP, DNS, IP Filter, PPPoE, DDNS, FTP, Alarm Server, IP Search (Support for Dahua IP cameras, DVRs, NVS)
Maximum User Access	128 Users
Mobile Operating System	IOS, Android
Interoperability	ONVIF 2.4, SDK, CGI
Storage	
Internal HDD	Four (4) SATA III Ports, Up to 10 TB capacity for each HDD
eSATA	One (1) Port
Auxiliary Interface	
USB	Two (2) USB 3.0 Ports, rear panel One (1) USB 2.0 Port, front panel
RS232	One (1) Port for PC Communication and Keyboard
RS485	One (1) Connection for PTZ Control
Electrical	
Power Supply	Single, 100 VAC to 240 VAC, 50/60 Hz
Power Consumption	< 16.7 W, without HDD
Smart Fan	NVR Automatically adjusts fan running speed
Environmental	
Operating Conditions	−10° C to +55° C (+14° F to +131° F), 86 to 106 kpa
Storage Conditions	−20° C to +70° C (−4° F to +158° F), 0 to 90% RH
Construction	
Dimensions	1.5U, 440.0 mm x 411.20 mm x 76.0 mm (17.32 in. x 16.19 in. x 2.99 in.)
Net Weight	4.30 kg (9.50 lb), without HDD
Gross Weight	7.0 kg (15.40 lb), without HDD
Installation	Rack-mount
Certifications	
CE	EN55022, EN55024, EN50130-4, EN60950-1
Safety	UL 60950-1
Electromagnetic Compatibility (EMC)	FCC CFR 47 Part 15 Subpart B ANSI C63.4-2014

Camera Support

Thermal Cameras	16 Channels
Analytics+ Cameras	
Face Detection+	Four (4) Channels
Perimeter Protection	16 Channels
Metadata	10 Channels
Smart Motion Detection+ ¹	Any channel connected to a Dahua Network camera with Smart Motion Detection+

Intelligence


IVS triggers an alarm and takes a defined action for the following events:

Standard Features	<ul style="list-style-type: none">• Tampering with the camera.• Camera loses or changes focus drastically.• Error writing to an onboard Micro SD card.• Error sending or receiving data over the network.• Unauthorized access to the camera.
Premium Features	
Motion	An object moves through any part of the scene.
Tripwire	A target crosses a user-defined line.
Intrusion	A target enters or exits a defined perimeter.
Scene Change	A person or object moves the camera to change the scene or covers the camera to obscure the scene.
Abandoned/Missing Object	A target leaves an object in designated area, or a target removes an object from the same designated area.
Advanced Features	
Facial Detection	Detects and captures a snapshot of a human face in a defined area within a scene.
People Counting	Measure the number of customers, visitors or passengers in a surveillance scene.
Heat Map	Generates a visual representation of data.


Ordering Information

Type	Part Number	Description
32-channel NVR	N54B5N4	32-channel 1.5U 4K H.265 Network Video Recorder, 4 TB
	N54B5N6	32-channel 1.5U 4K H.265 Network Video Recorder, 6 TB
	N54B5N8	32-channel 1.5U 4K H.265 Network Video Recorder, 8 TB
	N54B5N10	32-channel 1.5U 4K H.265 Network Video Recorder, 10 TB
	N54B5N20	32-channel 1.5U 4K H.265 Network Video Recorder, 20 TB
	N54B5N40	32-channel 1.5U 4K H.265 Network Video Recorder, 40 TB

Dimensions (mm/in.)

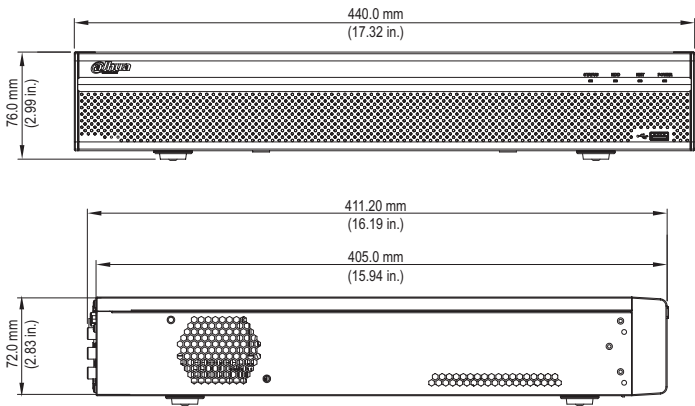

Rear Panel

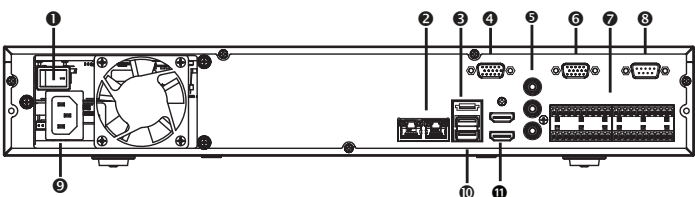

1	On/Off Button	7	Alarm Input/Output and RS485 Connection (use A/B ports)
2	1000 Mbps Ethernet Port, RJ-45 (x2)	8	RS232 Port
3	eSATA Port	9	Power Input
4	VGA-1 Output	10	USB 3.0 Port (x2)
5	Audio Input, RCA Audio Output, RCA (x2)	11	HDMI-1 Output HDMI-2 Output
6	VGA-2 Output		

1. The recorder SMD+ functions are available only when connected to a Dahua network camera with SMD+ functionality. Pair a Smart Motion Detection+ camera with a Dahua recording device that also offers SMD+ functionality to take advantage of SMD+ alarm filtering and object classification when searching and playing back recorded video.

