

## NetWay4E1PL

### 4-port PoE+ Switch

Altronix NetWay4E1PL PoE+ Switch provides a 1Gb SFP port and four (4) PoE+ (30W) ports. Cameras/edge devices may be located up to 100m from the unit.



NetWay4E1PL

#### Key Features


- Four (4) 10/100/1000 Mbps PoE/PoE+ (up to 30W) ports
- IEEE 802.3af (15W) and IEEE 802.3at (30W) compliant
- One (1) Gigabit (Fiber) SFP port
- PoE activity LED indicators
- Built-in charger for sealed lead acid or gel type batteries
- Automatic switch over to stand-by battery when AC fails
- CE European Conformity
- Lifetime Warranty

#### Similar products

<b>NetWay4E1WPX</b>	Outdoor 4-port PoE+ Hardened Switch in NEMA 4/4X, IP66-11 enclosure which accommodates stand-by batteries
<b>NetWay4E1WP</b>	Outdoor 4-port PoE+ Hardened Switch in NEMA 4/4X, IP66-11 enclosure
<b>NetWay4E1WPN</b>	Outdoor 4-port PoE+ Hardened Switch only in NEMA 4/4X, IP66-11 enclosure
<b>NetWay4E1X</b>	Indoor 4-port PoE+ Hardened Switch in NEMA 1 Rated indoor enclosure
<b>NetWay4E1B</b>	4-port PoE+ Hardened Switch (board only)

#### Lifetime Warranty

## Typical Applications

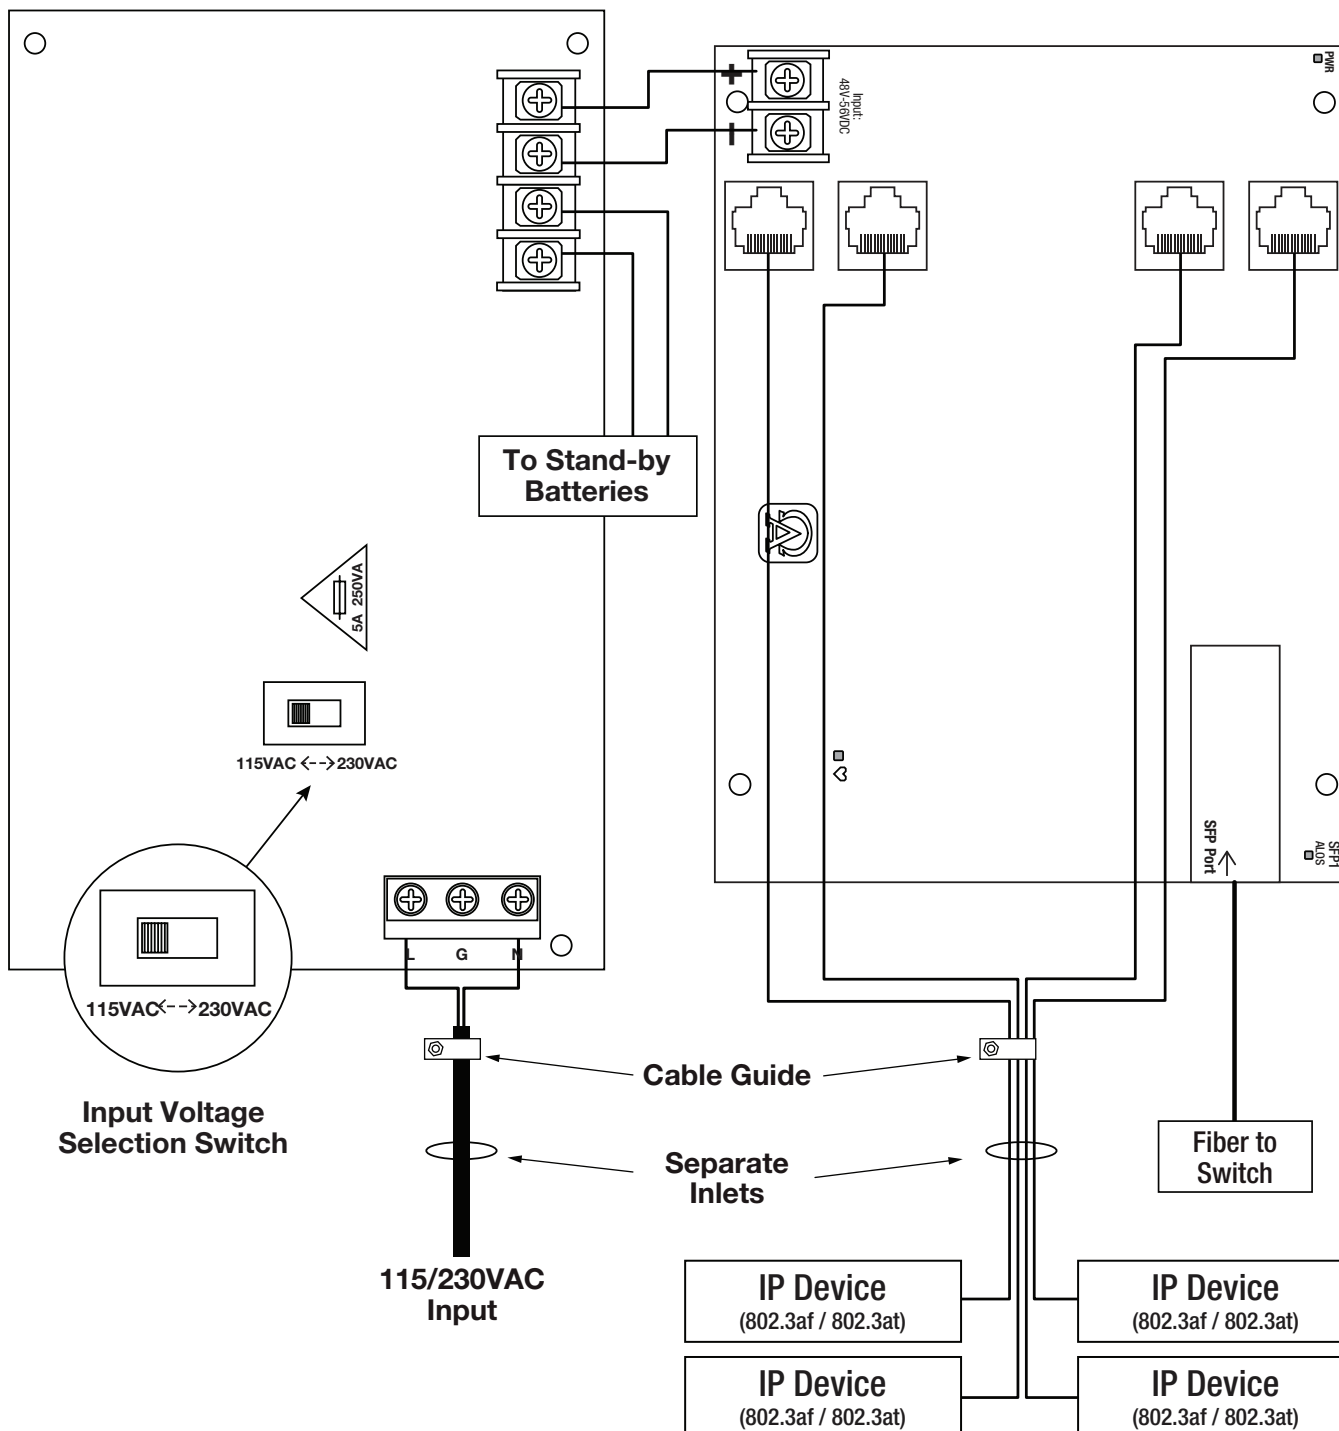

### Lifetime Warranty

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA

phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com

**NetWay4E1PL**

4-port PoE+ Switch

**Specifications****Input**

Voltage 115VAC, 60Hz, 2.5A or  
230VAC, 50/60Hz, 1.3A

**Power Output**

**Maximum Power** Four (4) 10/100/1000 Mbps  
PoE/PoE+ (up to 30W) ports  
IEEE 802.3at (30W) and  
IEEE 802.3af (15W) compliant  
120W total power  
Integral surge protection

**Fiber Port:** One (1) Gigabit SFP (Fiber) port

**Back-up Battery** *(not included)*

**Type** Sealed lead acid or gel type.  
**Failover** Upon AC loss, instantaneous.

**Indicators (LED)**

Individual PoE On LEDs for each port  
Individual IP Link status, 10/100Base-T/active LEDs for  
each port  
ALOS LED indicates fiber connection for SFP port  
Heartbeat LED indicates proper operation of the unit

**Agency Listings**

CE European Conformity

**Physical and Environmental****Dimensions (H x W x D)**

10.75" x 8.875" x 2.375" (273.1mm x 225.4mm x 60.3mm)

**Product Weight:** 2.6 lb. (1.18 kg)

**Shipping Weight:** 4.0 lb. (1.81 kg)

**Temperature****Operating:**

60W: -40°C to 75°C (-40°F to 167°F)  
75W: -40°C to 70°C (-40°F to 158°F)  
100W: -40°C to 55°C (-40°F to 131°F)  
120W: -40°C to 45°C (-40°F to 113°F)

**Storage:** -40°C to 85°C (-40°F to 185°F)

**Relative Humidity:**

85% +/- 5%

**BTU/Hr. (approx.):** 61 BTU/Hr.

**Operating Altitude:** -304.8 to 2,000m

**Accessories** (order separately)**SFP Modules - Hot pluggable Transceivers**

**P1MM** Multi-Mode SFP Module for distances up to 550m

**P1SM10** Single-Mode SFP Module for distances up to 10km

**P1AB2K** Single Strand SFP Module for distances up to 2km

**P1GCE** Copper SFP Module for distances up to 100m

**Lifetime Warranty**

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA

phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com